

REV.
C

SAE AS85049/118

RATIONALE

REVISION IS REQUIRED TO CHANGE THE SCREW SIZE CALLOUT FOR -24 AND CHANGE THE DECIMAL PLACES FOR THE "A" DIMENSION FOR -61 TO AGREE WITH THE DECIMAL PLACES FOR ALL OTHER SIZE "A" DIMENSION VALUES.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF SAE AS85049.



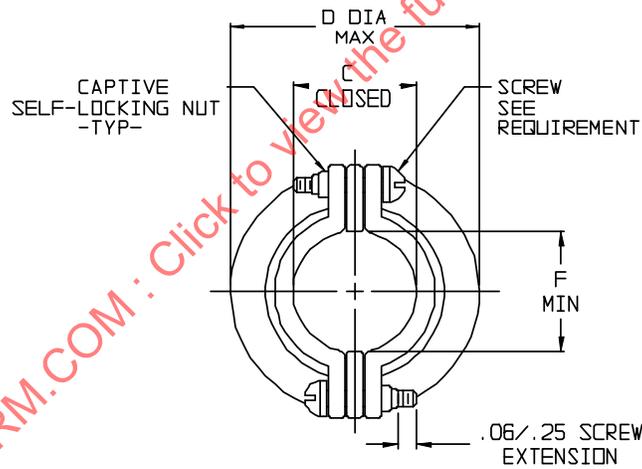


FIGURE 1 - DIMENSION AND CONFIGURATION

SAENORM.COM : Click to view the full PDF of as85049_118c

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85049/118C>

THIRD ANGLE PROJECTION

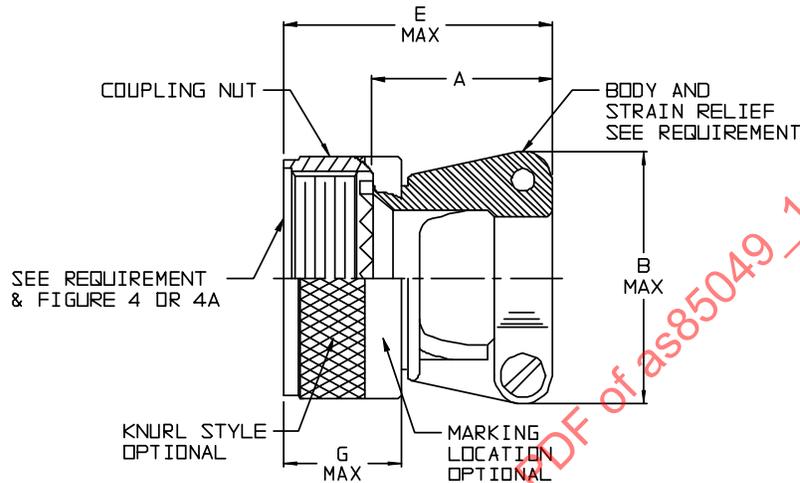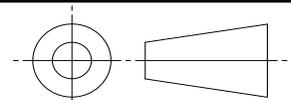

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT INFORMATION: AS85049

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT SELF-LOCKING, NON-SELF-LOCKING, CATEGORY 4B (FOR AS50151 CRIMP, MIL-DTL-26482 SERIES 2, AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III CONNECTORS)

SAE AS85049/118
SHEET 1 OF 3

REV. C

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - SHELL SIZES AND DIMENSIONS

DASH NO.	CONNECTOR SHELL SIZE				A LENGTH 1/	B DIA MAX	C ±.031 DIM 2/	D MAX DIA	E MAX OVERALL LENGTH	F MIN	G MAX	SCREW SIZE (REF)
	MIL-DTL- 83723 SERIES 3	AS50151 CRIMP	AS81703 SERIES 3	MIL-DTL- 26482 SERIES 2								
-03	N/A	N/A	3	N/A	.77/.51 (19.6/12.9)	.88 (22.4)	.219 (5.6)	.95 (24.1)	1.14 (29.0)	.22 (5.6)	.710 (18.0)	4-40
-08	8	8S	N/A	8	.77/.51 (19.6/12.9)	.88 (22.4)	.219 (5.6)	.89 (22.6)	1.14 (29.0)	.22 (5.6)	.710 (18.0)	4-40
-10	10	10S,10SL	N/A	10	.89/.64 (22.6/16.3)	.94 (23.9)	.264 (6.7)	1.01 (25.7)	1.25 (31.8)	.27 (6.9)	.710 (18.0)	4-40
-12	12	12,12S	7	12	1.01/.76 (25.7/19.3)	1.12 (28.4)	.344 (8.7)	1.14 (29.0)	1.38 (35.1)	.35 (8.9)	.710 (18.0)	4-40
-14	14	14,14S	12	14	1.01/.76 (25.7/19.3)	1.19 (30.2)	.460 (11.7)	1.26 (32.0)	1.38 (35.1)	.47 (11.9)	.710 (18.0)	4-40
-16	16	16,16S	19	16	1.13/.88 (28.7/22.4)	1.44 (36.6)	.545 (13.8)	1.39 (35.3)	1.50 (38.1)	.55 (14.0)	.710 (18.0)	4-40
-18	18	18	27	18	1.38/1.13 (35.1/28.7)	1.56 (39.6)	.615 (15.7)	1.51 (38.4)	1.75 (44.5)	.62 (15.7)	.710 (18.0)	6-32
-20	20	20	37	20	1.51/1.25 (38.4/31.6)	1.69 (42.9)	.698 (17.7)	1.64 (41.7)	1.88 (47.8)	.70 (17.8)	.710 (18.0)	6-32
-22	22	22	N/A	22	1.62/1.38 (41.1/35.1)	1.75 (44.5)	.780 (19.8)	1.76 (44.7)	2.00 (50.8)	.78 (19.8)	.710 (18.0)	6-32
-24	24	24	N/A	24	1.76/1.51 (44.7/38.4)	1.88 (47.8)	.850 (21.6)	1.89 (48.0)	2.13 (54.1)	.85 (21.6)	.710 (18.0)	8-32
-28	N/A	28	N/A	N/A	2.03/1.67 (51.6/42.4)	2.12 (53.8)	.950 (24.1)	2.14 (54.4)	2.56 (65.0)	.95 (24.1)	.890 (22.6)	8-32
-32	N/A	32	N/A	N/A	2.28/1.87 (57.9/46.7)	2.50 (63.5)	1.015 (25.3)	2.40 (61.0)	2.81 (71.4)	1.02 (25.9)	.890 (22.6)	8-32
-36	N/A	36	N/A	N/A	2.53/2.22 (64.3/56.4)	2.62 (66.5)	1.187 (30.1)	2.64 (67.1)	3.06 (77.7)	1.19 (30.2)	.890 (22.6)	8-32
-40	N/A	40	N/A	N/A	2.63/2.41 (66.8/61.2)	2.68 (68.1)	1.220 (31.0)	2.89 (73.4)	3.16 (80.3)	1.22 (31.0)	.890 (22.6)	8-32
-44	N/A	44	N/A	N/A	3.00/2.80 (76.2/71.1)	3.00 (76.2)	1.500 (37.3)	3.14 (79.8)	3.53 (89.7)	1.50 (37.3)	.890 (22.6)	8-32
-48	N/A	48	N/A	N/A	3.40/3.20 (86.4/81.3)	3.50 (88.9)	1.625 (41.3)	3.39 (86.1)	3.93 (99.8)	1.63 (41.3)	.890 (22.6)	8-32
-61	N/A	N/A	61	N/A	1.76/1.51 (44.7/38.4)	1.88 (47.8)	.850 (21.6)	1.95 (49.5)	2.13 (54.1)	.85 (21.6)	.710 (18.0)	8-32

1/ THE "A" DIMENSION IS MEASURED FROM THE BOTTOM OF THE ACCESSORY TEETH TO THE END OF THE STRAIN RELIEF
 2/ CABLE ENTRY IS MEASURED WITH SADDLE BARS CLOSED AND BOTTOMED ON CLAMP EARS.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. DIMENSIONS APPLY AFTER PLATING.
3. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED ON 25.4 MM = 1 INCH.
4. MILLIMETERS ARE IN PARENTHESES.
5. STRAIN RELIEF ACCOMMODATES AS85049/127 BUSHING STRIP.

REQUIREMENTS:

DESIGN AND CONSTRUCTION:

1. DIMENSIONS AND CONFIGURATION: SEE FIGURE 1 AND TABLE 1.
2. INTERFACE DIMENSIONS SHALL CONFORM TO SAE AS85049, FIGURE 4 OR 4A
3. ACCESSORIES CONSIST OF A COUPLING NUT, BODY AND STRAIN RELIEF THE COUPLING NUT SHALL BE CAPTIVATED TO, AND ROTATABLE ON THE BODY.

 An SAE International Group	AEROSPACE STANDARD	SAE AS85049/118 SHEET 2 OF 3	REV. C
	CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT SELF-LOCKING, NON-SELF-LOCKING, CATEGORY 4B (FOR AS50151 CRIMP, MIL-DTL-26482 SERIES 2, AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III CONNECTORS)		