

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/3A, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/3A, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as85049-3

THIRD ANGLE PROJECTION



AS85049/3

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 2000-04 REAFFIRMED 2006-01

PREPARED BY SAE SUBCOMMITTEE AE-8C1



AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A (FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/3
SHEET 1 OF 13

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Tel: 724-776-4970 (outside USA)






Fax: 724-776-0790

Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

THE REQUIREMENTS FOR ACQUIRING THE ACCESSORIES DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF MIL-C-85049.

AS85049/3

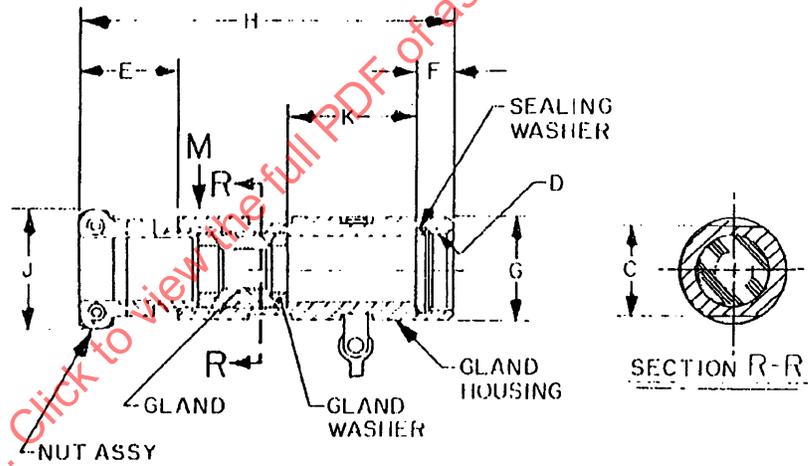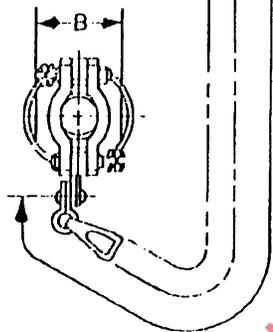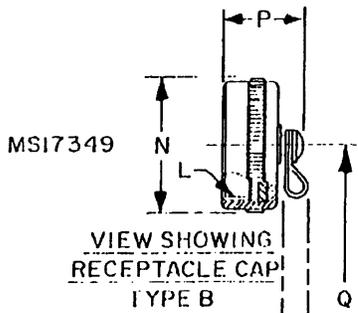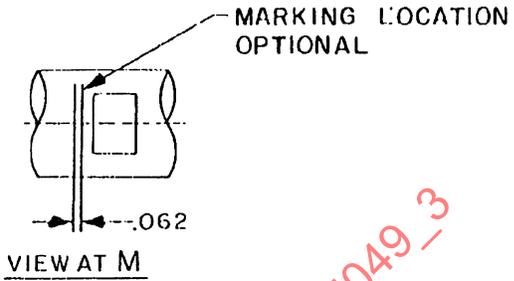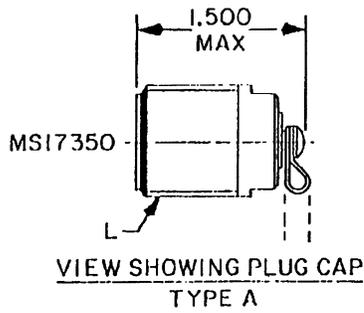

CONFIGURATION A. STYLE 1 CABLE SEALING.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS.

Size Number	Shell size	Cable range		B	C	D Thread Class 2B-LH	E Free length max	F Dia +.016	G Dia +.010 - .020	H Max	J Max	K +.015 - .025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
		Max dia	Min dia													
1	12	.375	.281	.750	.812	.7500-20 UNEF	.969	.479	.938	3.365	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.188	.750	.812	.7500-20 UNEF	.969	.479	.938	3.365	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	14	.438	.344	.875	.938	.8750-20 UNEF	.969	.479	1.062	3.678	1.125	.871	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
4	16	.605	.511	1.000	1.062	1.0000-20 UNEF	1.062	.479	1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
5	16	.530	.436	1.000	1.062	1.0000-20 UNEF	1.062	.479	1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
6	16	.405	.311	1.000	1.062	1.0000-20 UNEF	1.062	.479	1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
7	18	.625	.531	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
8	18	.699	.605	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	18	.500	.406	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
10	18	.455	.361	1.062	1.125	1.1250-18 NEF	1.062	.479	1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
11	20	.828	.715	1.188	1.250	1.2500-18 NEF	1.125	.479	1.438	4.615	1.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	20	.562	.449	1.188	1.250	1.2500-18 NEF	1.125	.479	1.438	4.615	1.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
13	22	.750	.637	1.312	1.375	1.3750-18 NEF	1.094	.479	1.562	4.647	1.812	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
14	22	.900	.787	1.312	1.375	1.3750-18 NEF	1.094	.479	1.562	4.647	1.812	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00

CONFIGURATION A. STYLE 1 CABLE SEALING - CONTINUED.


FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	Cable range		B	C	D Thread Class 2B-LH	E Free length max	F	G Dia +.010 - .020	H Max	J +.031 - .025	K +.015 - .025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
		Max dia	Min dia													
15	22	1.085	1.312	1.375	1.375	1.3750-18 NEF	1.094	.479	1.562	4.647	1.812	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
16	24	1.055	1.546	1.625	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
17	24	1.000	1.546	1.625	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
18	24	1.109	1.546	1.625	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
19	24	.880	1.546	1.625	1.625	1.6250-18 NEF	1.281	.479	1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
20	28	1.180	1.055	1.780	1.875	1.8750-16 UN	1.281	.479	2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
21	28	1.230	1.105	1.780	1.875	1.8750-16 UN	1.281	.479	2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
22	28	1.310	1.185	1.780	1.875	1.8750-16 UN	1.281	.479	2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
23	32	1.455	1.320	2.000	2.062	2.0625-16 UNS	1.281	.479	2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
24	32	1.531	1.406	2.000	2.062	2.0625-16 UNS	1.281	.479	2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
25	32	1.375	1.250	2.000	2.062	2.0625-16 UNS	1.281	.479	2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
26	36	1.656	1.531	2.250	2.312	2.3125-16 UNS	1.281	.479	2.562	5.083	2.953	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
27	36	1.562	1.437	2.250	2.312	2.3125-16 UNS	1.281	.479	2.562	5.083	2.953	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
28	44	2.250	2.105	2.875	2.750	2.8750-16 UN	1.382	.667	3.125	6.471	3.500	2.218	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
29	44	2.170	2.025	2.875	2.750	2.8750-16 UN	1.382	.667	3.125	6.471	3.500	2.218	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

CONFIGURATION A. STYLE 1 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

AS85049/3

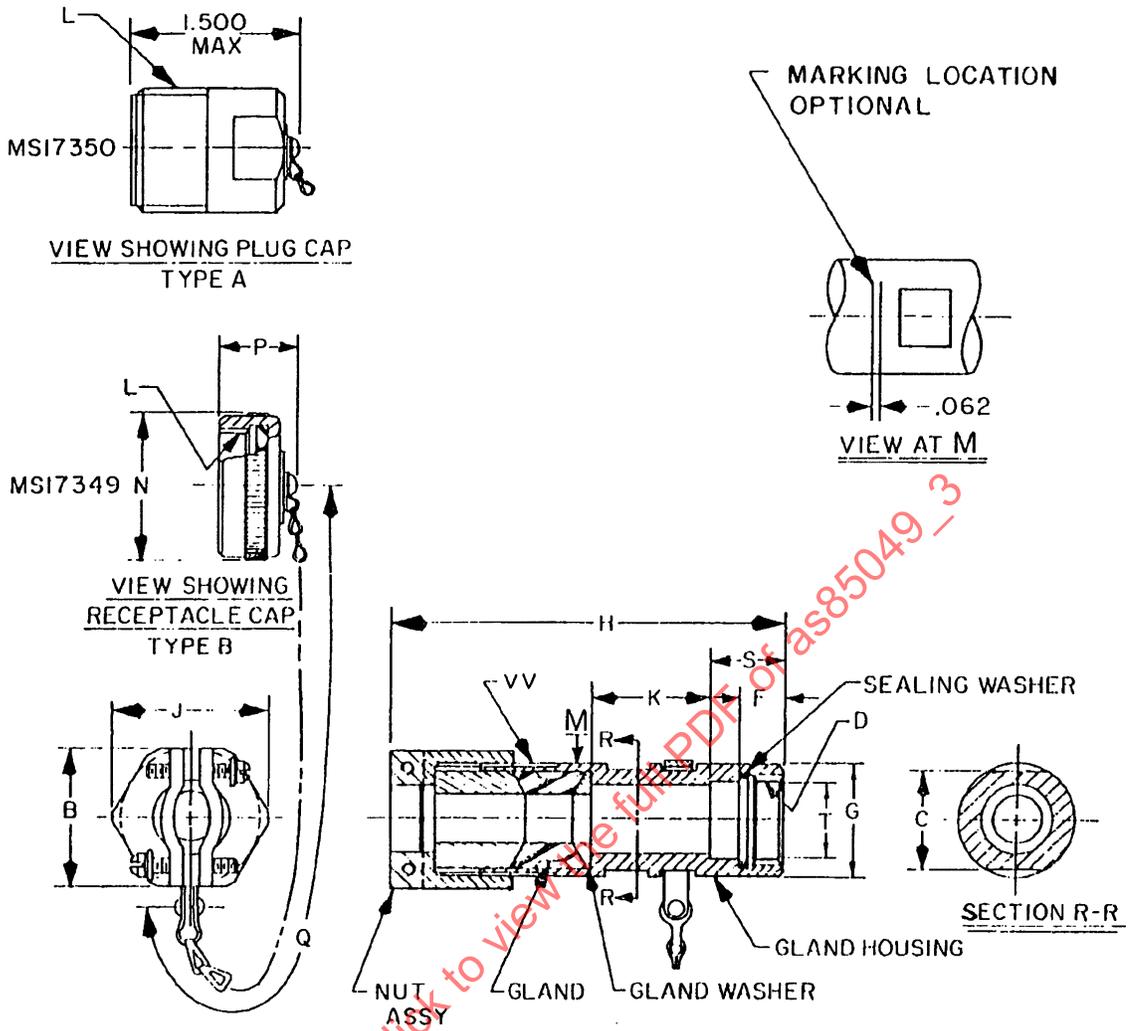

CONFIGURATION B. STYLE 2 CABLE SEALING.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

AS85049/3

Size number	Shell size	Cable range		B +.005	C +.000 -.010	D Thread Class 2B-LH	F +.016	G Dia +.010 -.020	H Max	J Max	K ±.010
		Max	Min								
1	12	.396	.246	1.094	.812	.7500-20 UNEF	.479	.938	4.000	1.110	.950
2	14	.521	.321	1.129	.938	.8750-20 UNEF	.479	1.062	4.100	1.320	1.075
3	16	.646	.446	1.344	1.062	1.0000-20 UNEF	.479	1.188	4.400	1.420	1.200
4	18	.765	.565	1.469	1.125	1.1250-18 UNEF	.479	1.312	4.900	1.600	1.325
5	20	.890	.690	1.625	1.250	1.2500-18 UNEF	1.438	1.188	4.900	1.750	1.325
6	22	1.015	.815	1.750	1.375	1.3750-18 UNEF	.479	1.562	4.900	1.900	1.325
7	24	1.180	.980	2.000	1.625	1.6250-18 NEF	.479	1.812	5.000	2.190	1.450
8	28	1.430	1.230	2.250	1.875	1.8750-16 UN	.479	2.062	5.300	2.475	1.700
9	28	1.230	1.030	2.250	1.875	1.8750-16 UN	.479	2.062	5.300	2.475	1.700
10	32	1.670	1.430	2.500	2.062	2.0625-16 N	.479	2.312	5.600	2.715	1.950
11	36	1.860	1.660	2.750	2.312	2.3125-16 N	.479	2.562	5.600	2.900	1.950
12	40	2.110	1.860	3.062	2.562	2.6250-16 UN	.667	2.875	5.725	3.250	1.950

CONFIGURATION B. STYLE 2 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

AS85049/3

Size number	Shell size	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link	S ±.010	T Dia ±.005	VV Gland threads class 2-LH
1	12	.8750-0.1P-0.2L-DS	1.094	.765	5.00	1.425	.600	.9375-20 UNEF
2	14	1.0000-0.1P-0.2L-DS	1.219	.765	5.00	1.425	.726	1.0625-18 UNEF
3	16	1.1250-0.1P-0.2L-DS	1.344	.980	5.00	1.605	.845	1.1875-18 NEF
4	18	1.2500-0.1P-0.2L-DS	1.469	.980	5.00	1.605	.970	1.3125-18 NEF
5	20	1.3750-0.1P-0.2L-DS	1.562	.980	5.00	1.605	1.095	1.4375-18 NEF
6	22	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.5625-18 NEF
7	24	1.7500-0.1P-0.2L-DS	1.938	.980	6.00	1.605	1.470	1.8125-16 N
8	28	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	2.0625-16 N
9	28	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	2.0625-16 N
10	32	2.2500-0.1P-0.2L-DS	2.469	.980	6.00	1.605	1.900	2.3125-16 N
11	36	2.5000-0.1P-0.2L-DS	2.719	.980	6.00	1.605	2.150	2.5000-16 UN
12	40	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.8750-16 UN

CONFIGURATION B. STYLE 2 CABLE SEALING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

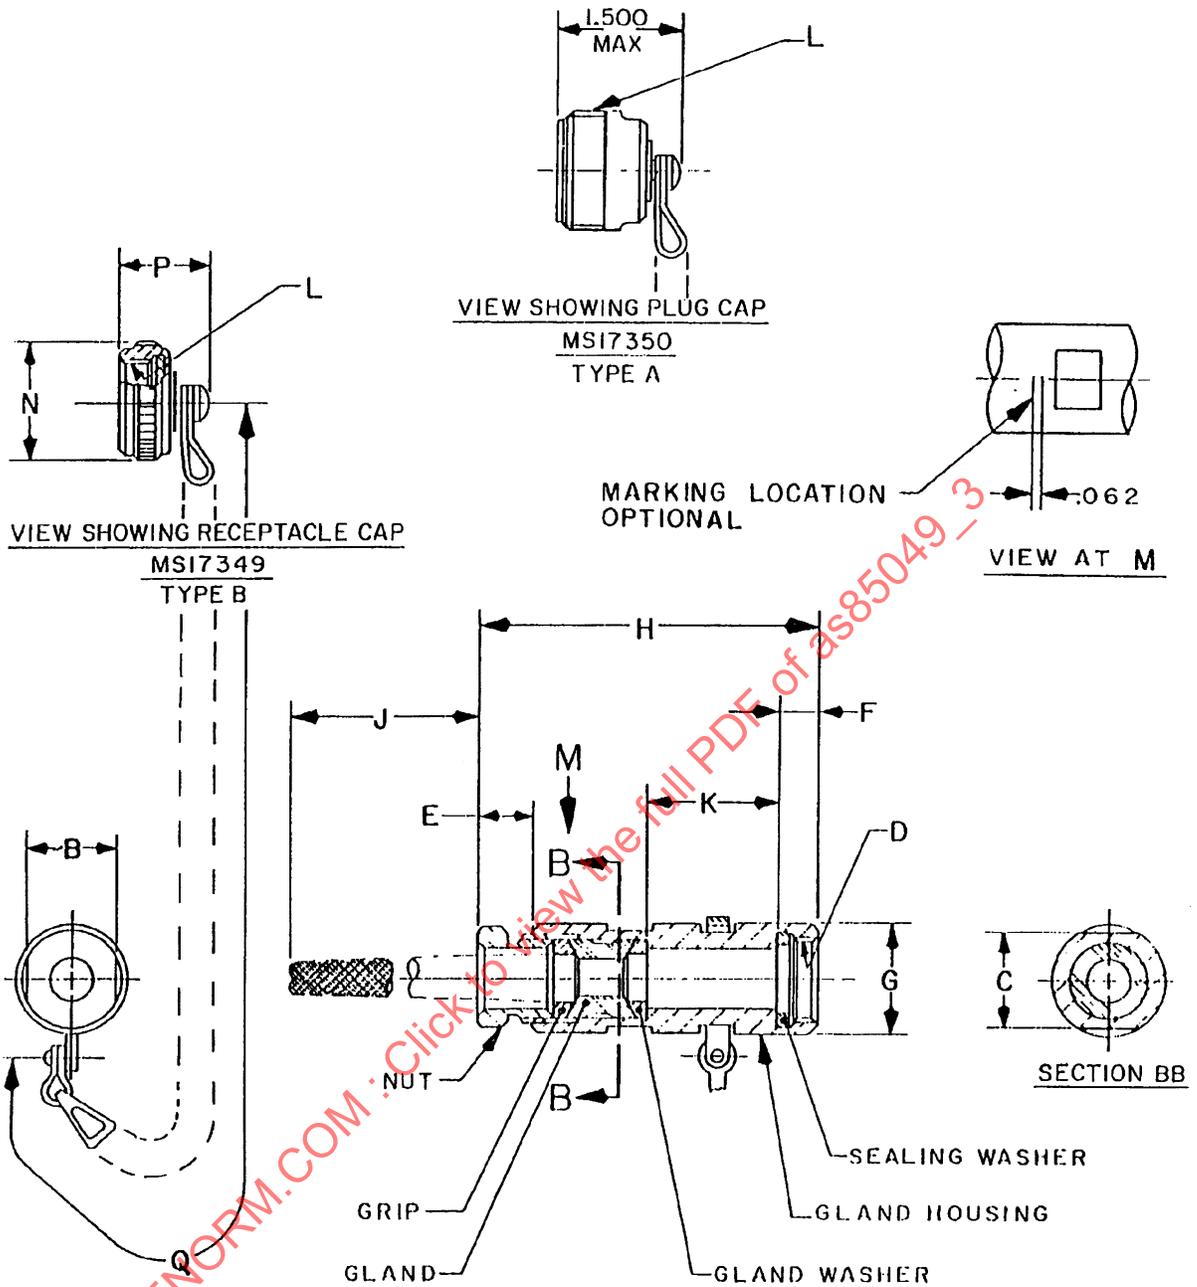


FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size Number	Shell size	Cable range		B	C	D Thread Class 2B-LH	E Free length max	F Dia +.016 -.020	G Dia +.010 -.020	H Max	J Approx-free length	K +.015 -.025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
		Max dia	Min dia													
1	12	.377	.281	.750	.812	.7500-20 UNEF	.539	.479	.938	2.935	3.344	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.219	.750	.812	.7500-20 UNEF	.539	.479	.938	2.935	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	14	.438	.400	.875	.938	.8750-20 UNEF	.539	.479	1.062	3.248	4.344	.871	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
4	16	.605	.511	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	5.188	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
5	16	.530	.436	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	4.688	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
6	16	.405	.316	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	3.688	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
7	18	.699	.605	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	6.188	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
8	18	.625	.560	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	6.188	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	18	.455	.361	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	4.188	1.371	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
10	20	.828	.715	1.125	1.250	1.2500-18 UNEF	.625	.479	1.438	4.115	6.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
11	20	.562	.449	1.125	1.250	1.2500-18 UNEF	.625	.479	1.438	4.115	5.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	22	.900	.787	1.250	1.375	1.3750-18 UNEF	.597	.479	1.562	4.150	7.188	1.371	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
13	22	.750	.637	1.250	1.375	1.3750-18 UNEF	.597	.479	1.562	4.150	6.688	1.371	1.5000-0.1P-0.2L-DS	1.938	.980	6.00
14	24	1.109	.984	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	7.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00

CONFIGURATION C. STYLE 3 CABLE SEALING AND GRIPPING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.

Size number	Shell size	Cable range		b	c	D Thread Class 2B-LH	E Free length max	F Dia +.016	G Dia +.010 - .020	H Max	J Approx-free length	K +.015 - .025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
		Max dia	Min dia													
15	24	1.000	.875	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	7.188	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
16	24	.880	.755	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	6.688	1.371	1.7500-0.1P-0.2L-US	1.938	.980	6.00
17	28	1.310	1.185	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.688	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
18	28	1.230	1.105	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.188	1.372	2.0000-0.1P-0.2L-DS	1.219	.980	6.00
19	28	1.180	1.055	1.750	1.875	1.8750-16 UNS	.597	.479	2.062	4.275	8.188	1.372	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
20	32	1.531	1.406	2.000	2.062	2.0625-16 UNS	.597	.479	2.312	4.337	10.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
21	32	1.455	1.320	2.000	2.062	2.0625-16 UN	.597	.479	2.312	4.337	9.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
22	42	1.375	1.250	2.000	2.062	2.0625-16 UN	.597	.479	2.312	4.337	9.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
23	36	1.656	1.531	2.250	2.312	2.3125-16 UN	.597	.479	2.562	4.399	12.688	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
24	36	1.562	1.437	2.250	2.312	2.3125-16 UN	.597	.479	2.562	4.399	11.188	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
25	44	2.250	2.105	2.750	2.750	2.8750-16 UN	.710	.667	3.125	5.799	17.188	2.218	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
26	44	2.170	2.025	2.750	2.750	2.8750-16 UN	.710	.667	3.125	5.799	17.188	2.218	3.0000-0.1P-U.2L-DS	3.217	.980	6.00

CONFIGURATION C. STYLE 3 CABLE SEALING AND GRIPPING - CONTINUED.

FIGURE 1. CONFIGURATIONS AND DIMENSIONS - CONTINUED.