

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/63A, NOTICE 1, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/63A, NOTICE 1, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as85049-63

AS85049/63

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 2000-05

PREPARED BY SAE SUBCOMMITTEE AE-8C1



AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL,
STRAIN RELIEF, 90°, SELF-LOCKING AND
NONSELF-LOCKING, CATEGORY 4C
(MIL-C-38999 SERIES I AND II CONNECTORS)

AS85049/63
SHEET 1 OF 6

AS85049/63

THE REQUIREMENTS FOR ACQUIRING THE ACCESSORIES DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF MIL-C-85049.

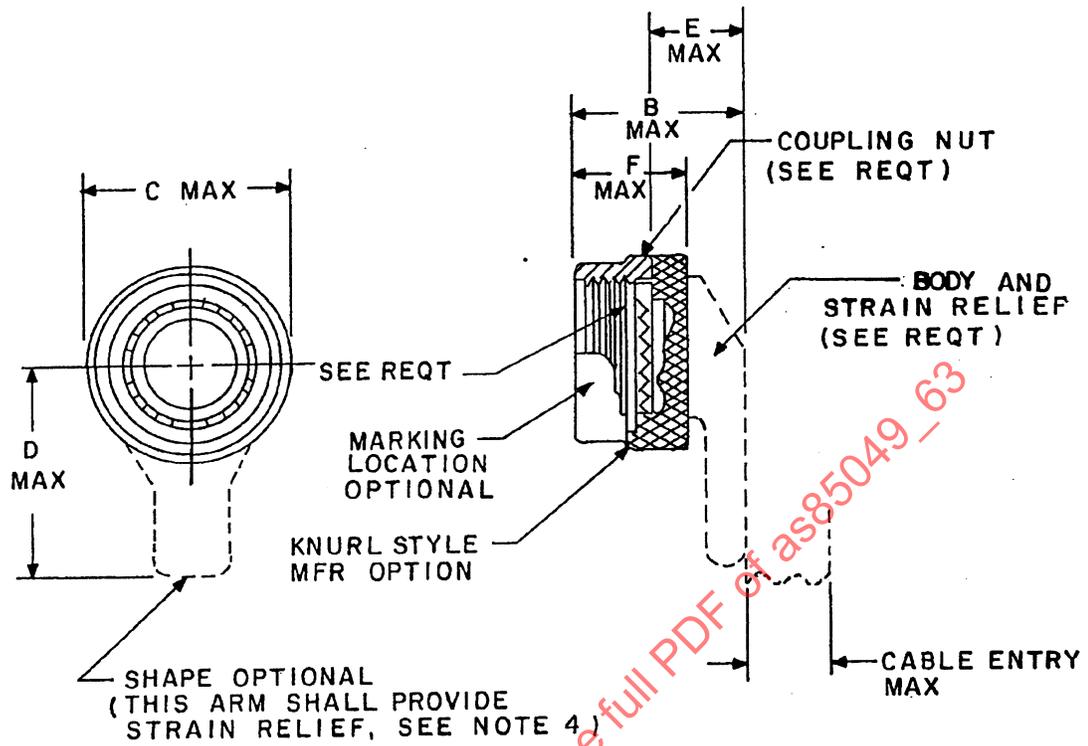


FIGURE 1. DIMENSIONS AND CONFIGURATION (SELF-LOCKING AND NONSELF-LOCKING).

SAENORM.COM : Click to view the full PDF of as85049_63


Shell sizes and dimensions

Dash number	Connector shell size		B max	C max		D max	E max	F max		Cable entry max
	Series II	Series I		self-locking	Non Self-locking			self-locking	Non self-locking	
8	8	9	.85 (21.6)	.86 (21.8)	.75 (19.1)	1.22 (31.0)	.63 (16.0)	.590 (14.99)	.540 (13.72)	.264 (6.71)
10	10	11	.85 (21.6)	.98 (24.9)	.85 (21.6)	1.29 (32.8)	.63 (16.0)	.590 (14.99)	.540 (13.72)	.392 (9.96)
12	12	13	.85 (21.6)	1.16 (29.5)	1.00 (25.4)	1.62 (41.1)	.63 (16.0)	.590 (14.99)	.540 (13.72)	.506 (12.85)
14	14	15	.92 (23.4)	1.28 (32.5)	1.10 (27.9)	1.66 (42.2)	.70 (17.8)	.590 (14.99)	.540 (13.72)	.631 (16.03)
16	16	17	.92 (23.4)	1.41 (35.8)	1.25 (31.8)	1.72 (43.7)	.70 (17.8)	.590 (14.99)	.540 (13.72)	.756 (19.20)
18	18	19	.95 (24.1)	1.52 (38.6)	1.40 (35.6)	1.72 (43.7)	.73 (18.5)	.590 (14.99)	.540 (13.72)	.845 (21.46)
20	20	21	.95 (24.1)	1.64 (41.7)	1.50 (38.1)	1.79 (45.5)	.73 (18.5)	.590 (14.99)	.540 (13.72)	.970 (24.64)
22	22	23	.95 (24.1)	1.77 (45.0)	1.65 (41.9)	1.85 (47.0)	.73 (18.5)	.590 (14.99)	.540 (13.72)	1.095 (27.81)
24	24	25	.95 (24.1)	1.89 (48.0)	1.75 (44.5)	1.91 (48.5)	.73 (18.5)	.590 (14.99)	.540 (13.72)	1.220 (30.99)

NOTES:

- Dimensions are in inches.
- Tolerances shall be: .xx = ± 0.03 and .xxx = ± 0.15 angular tolerances x = ± 2 .
- Metric equivalents are in parentheses and are given for general information only.
- Strain relief unit is used with MS3367-1-X plastic strap, MIL-T-713 lacing twine or MIL-T-43435 lacing tape or equivalent, not supplied with the backshell.
- This accessory will not accommodate connectors using 8, 4, and 0 contacts.

FIGURE 1. DIMENSIONS AND CONFIGURATION (SELF-LOCKING AND NONSELF-LOCKING) - CONTINUED.

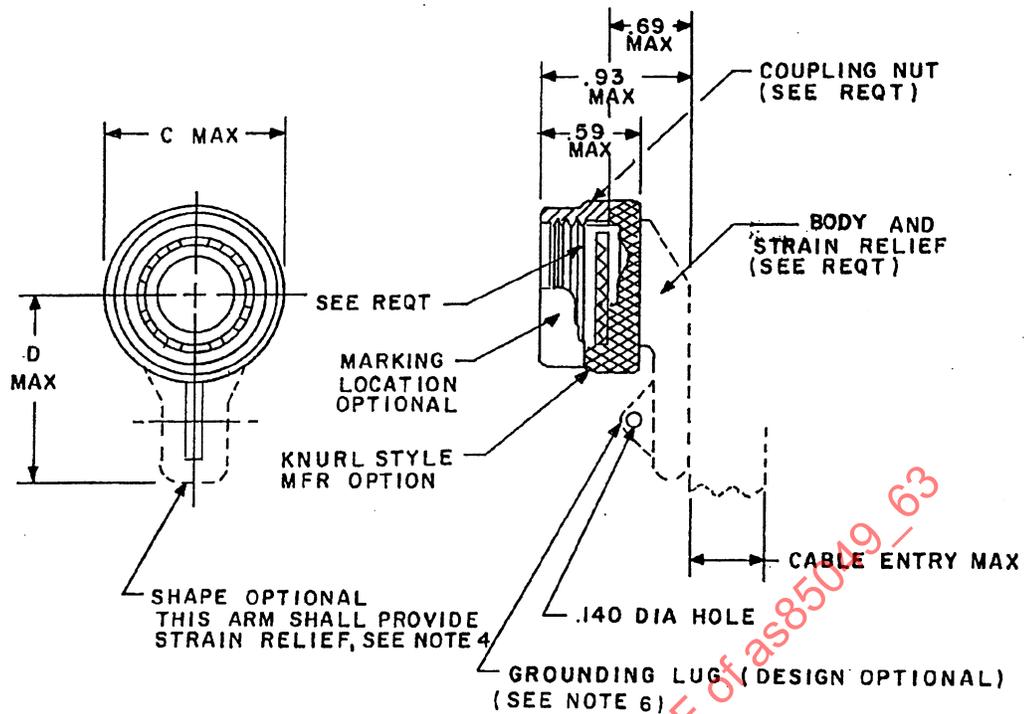

Dash number	Connector shell size		C dia max	D max	Cable entry max
	Series II	Series I			
8	8	9	.859 (21.82)	1.22 (31.0)	.264 (6.71)
10	10	11	.984 (24.99)	1.29 (32.8)	.392 (9.96)
12	12	13	1.156 (29.36)	1.62 (41.1)	.506 (12.85)
14	14	15	1.281 (32.54)	1.66 (42.2)	.631 (16.03)

Dash number	Connector shell size		C dia max	D max	Cable entry max
	Series II	Series I			
16	16	17	1.406 (35.71)	1.72 (43.7)	.756 (19.20)
18	18	19	1.516 (38.51)	1.72 (43.7)	.845 (21.46)
20	20	21	1.641 (41.68)	1.79 (45.5)	.970 (24.64)
22	22	23	1.766 (44.86)	1.85 (47.0)	1.095 (27.81)
24	24	25	1.891 (40.03)	1.91 (48.5)	1.220 (30.99)

- NOTES:
1. Dimensions are in inches.
 2. Tolerances shall be: .xx = ±.03 and .xxx = ±0.15 angular tolerances x = #2.
 3. Metric equivalents are in parentheses and are given for general information only.
 4. Strain relief unit is used with MS3367-1-X plastic strap, MIL-T-713 lacing twine or MIL-T-43435 lacing tape or equivalent, not supplied with the backshell.
 5. This accessory will not accommodate connectors using 8, 4, and 0 contacts.
 6. Not for Navy use. Not for new design for Air Force.

FIGURE 2. DIMENSIONS AND CONFIGURATIONS (SELF-LOCKING ONLY WITH GROUNDING LUG) - CONTINUED.