

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/76, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/76, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as85049-76

AS85049/76

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 2000-05

PREPARED BY SAE SUBCOMMITTEE AE-8C1



**AEROSPACE STANDARD**

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, 90°, SHIELD TERMINATION, CATEGORY 2B, NONSELF-LOCKING (MIL-C-38999 SERIES I AND II CONNECTORS)

**AS85049/76**  
SHEET 1 OF 6

AS85049/76

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-85049.


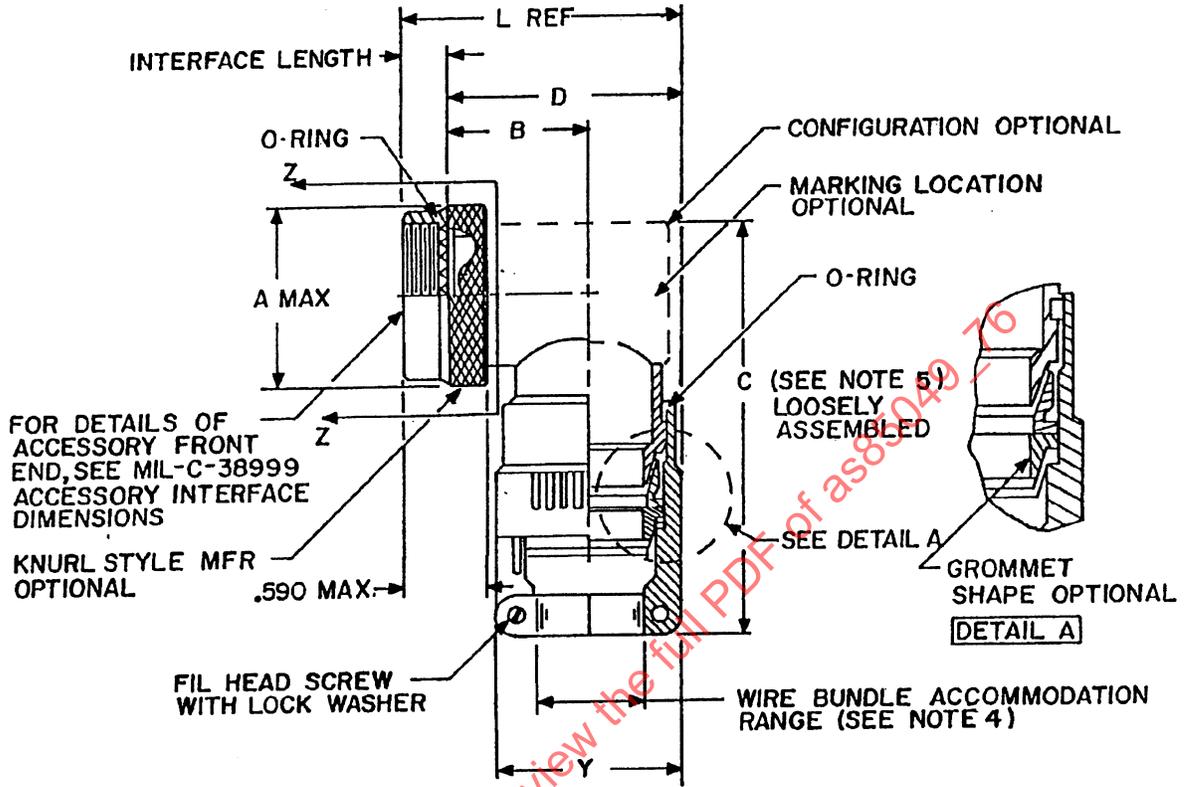


FIGURE 1. CONFIGURATION AND DIMENSIONS.



3 EQUALLY SPACED  
HOLES FOR .020 SAFETY WIRE

VIEW Z-Z

**NOTES:**

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. See table I for the clamp size available with each accessory shell size. See table II for wire bundle accommodation range for each clamp size. Wire bundle accommodation range is not a clamp measurement, but indicates the actual range the clamp and sealing member must accommodate. The grommet sealing dimension shall meet the maximum wire bundle accommodation range dimension of the designated clamp.
5. Loosely assembled is defined as the clamp tightened to the MIL-C-85049/76 connector accessory body two full thread lengths.

FIGURE 1. CONFIGURATION AND DIMENSIONS - CONTINUED.

TABLE I. CONNECTOR SHELL SIZE AND CLAMP SIZE.

Accessory shell size	Fits connector shell size		Clamp size (see table II) 1/	A max dia of coupling ring 2/	B 2/ ±.052	C 2/ ±.062	D 2/ ±.062	L 2/ REF
	Series I	Series II						
08	09	08	01 through 02	.75 (19.1)	.438 (11.1)	3.141 (79.8)	.968 (24.59)	1.27 (32.3)
10	11	10	01 through 03	.85 (21.6)	.533 (13.5)	3.261 (82.8)	1.10 (27.94)	1.40 (35.6)
12	13	12	02 through 04	1.00 (25.4)	.548 (13.9)	3.281 (83.3)	1.17 (29.72)	1.47 (37.3)
14	15	14	02 through 05	1.15 (29.2)	.638 (16.2)	3.351 (85.1)	1.29 (32.77)	1.59 (40.4)
16	17	16	02 through 06	1.25 (31.8)	.823 (20.9)	3.441 (87.4)	1.54 (39.12)	1.84 (46.7)
18	19	18	03 through 07	1.40 (35.6)	.913 (23.2)	3.611 (91.7)	1.69 (42.93)	1.99 (50.5)
20	21	20	03 through 08	1.55 (39.4)	.913 (23.2)	3.611 (91.7)	1.76 (44.70)	2.06 (52.3)
22	23	22	03 through 09	1.65 (41.9)	1.063 (27.0)	3.721 (94.5)	1.97 (50.04)	2.27 (57.7)
24	25	24	04 through 10	1.85 (47.0)	1.063 (27.0)	3.721 (94.5)	2.03 (51.56)	2.33 (59.2)

1/ See note 4 of figure 1.

2/ Dimensions are in inches. Metric equivalents are in parentheses and are given for general information only.

SAENORM.COM : Click to view the full PDF file

AS85049/76