

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."  
 SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.  
A

SAE AS85049/7

FEDERAL SUPPLY CLASS  
5935

RATIONALE

THIS SPECIFICATION HAS BEEN REVISED TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT AND INDUSTRY USERS. ALL REFERENCE SPECIFICATIONS HAVE BEEN UPDATED. GOVERNMENT JARGON AS A RESULT OF THE WORD-FOR-WORD CONVERSION HAS BEEN REMOVED. METRIC CONVERSIONS ADDED.


NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS85049.

SAENORM.COM : Click to view the full PDF of as85049\_7a

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85049/7A>

THIRD ANGLE PROJECTION

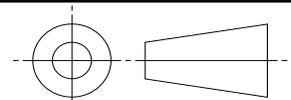

CUSTODIAN: SAE AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS85049

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, CABLE SEALING, 45°, CATEGORY 1A (FOR MIL-DTL-5015 CRIMP, MIL-DTL-26482 SERIES 2, AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III CONNECTORS)

**SAE AS85049/7**  
SHEET 1 OF 9

REV.  
A

Copyright 2008 SAE International  
 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)  
 Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)  
 Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2001-07 REVISED 2008-10

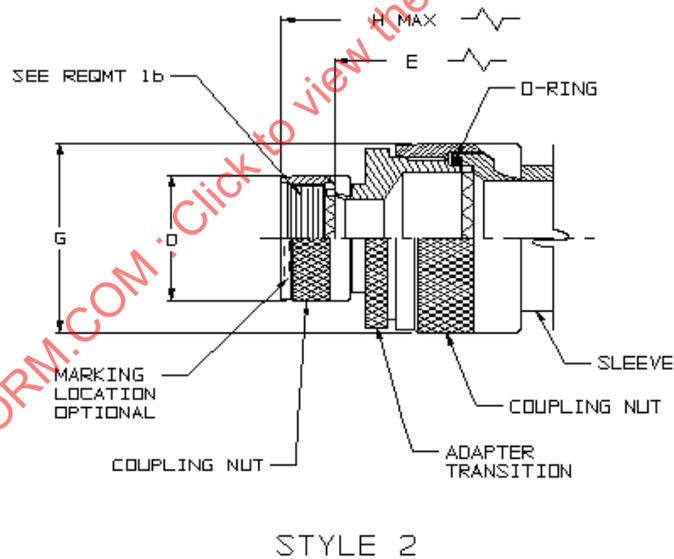
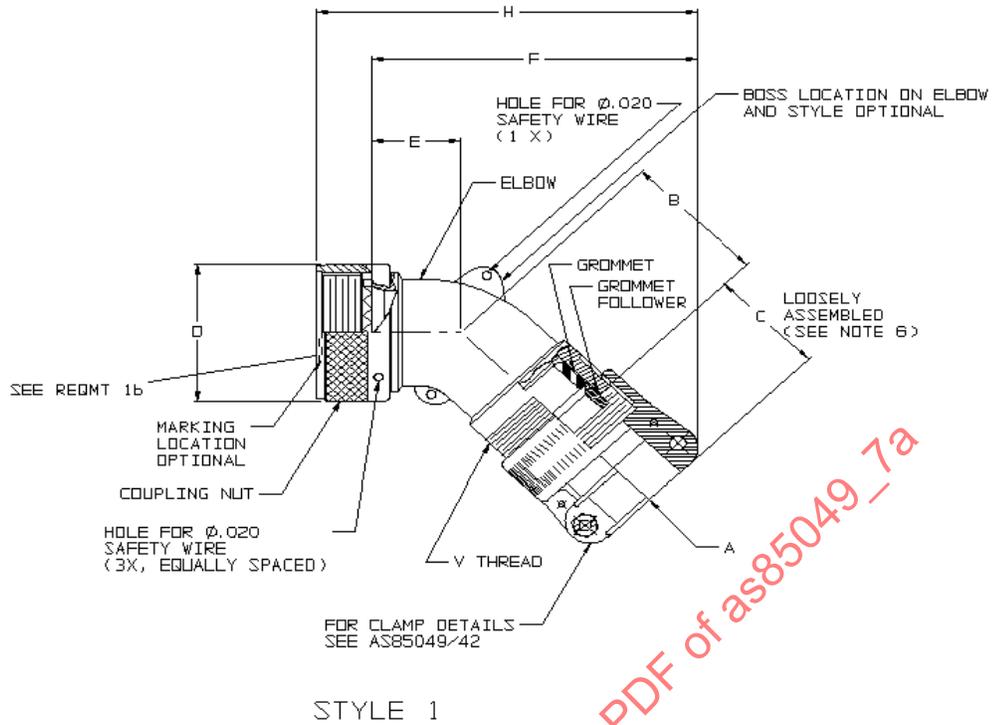


FIGURE 1 - CONFIGURATION AND DIMENSIONS

<p>SAE Aerospace An SAE International Group</p>	<b>AEROSPACE STANDARD</b>	<b>SAE AS85049/7</b> SHEET 2 OF 9	<b>REV. A</b>
	(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, CABLE SEALING, 45°, CATEGORY 1A (FOR MIL-DTL-5015 CRIMP, MIL-DTL-26482 SERIES 2, AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III CONNECTORS)		

TABLE 1 - DIMENSIONS

DASH NO	CONNECTOR SHELL SIZE				Clamp Size	A (See note 6)		Style	B ±.125	C Ref
	AS81703 SERIES 3	MIL-DTL-26482 SERIES 2	MIL-DTL-5015 Crimp	MIL-DTL-83723 Series III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
1	3	N/A	N/A	N/A	4	.125 (3.18)	.250 (6.35)	1	1.790 (45.47)	1.027 (26.09)
2					6	.250 (6.35)	.437 (11.10)	2	1.910 (48.51)	1.027 (26.09)
3	N/A	8	8S	8	4	.125 (3.18)	.250 (6.35)	1	1.182 (30.02)	1.027 (26.09)
4		10	10S, 10SL	10	4	.125 (3.18)	.312 (7.92)	1	1.850 (46.99)	1.027 (26.09)
5	7	12	12, 12S	12	6	.250 (6.35)	.375 (9.53)	1	1.245 (31.62)	1.027 (26.09)
6					4	.125 (3.18)	.312 (7.92)	1	1.910 (48.51)	1.027 (26.09)
7	12	14	14, 14S	14	6	.250 (6.35)	.437 (11.10)	1	1.910 (48.51)	1.027 (26.09)
8					10	.350 (8.89)	.500 (12.70)	1	1.910 (48.51)	1.027 (26.09)
9	19	16	16, 16S	16	6	.250 (6.35)	.437 (11.10)	1	2.000 (50.80)	1.027 (26.09)
10					10	.350 (8.89)	.575 (14.61)	1	1.655 (42.04)	1.027 (26.09)
11	27	18	18	18	6	.250 (6.35)	.437 (11.10)	1	2.110 (53.59)	1.027 (26.09)
12					12	.500 (12.70)	.700 (17.78)	1	1.750 (44.45)	1.059 (26.90)
13	37	20	20	20	10	.350 (8.89)	.625 (15.88)	1	2.300 (58.42)	1.027 (26.09)
14					16	.625 (15.88)	.779 (19.79)	1	1.938 (49.23)	1.156 (29.36)
15	16	10	.350 (8.89)	.625 (15.88)	1	2.300 (58.42)	1.027 (26.09)			
16					16	.625 (15.88)	.904 (22.96)	1	1.938 (49.23)	1.156 (29.36)

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	D DIA MAX	E ±.125	V THREAD CLASS 2A	F MAX	G DIA MAX	H MAX
1	.669 (16.99)	.561 (14.25)	.625-24 UNEF	3.37 ( 85.60)	-	3.74 ( 95.00)
2	.669 (16.99)	1.375 (34.93)	.750-20 UNEF	4.33 (109.98)	.858 (21.79)	4.70 (119.38)
3	.617 (15.67)	.500 (12.70)	.625-24 UNEF	2.88 ( 73.15)	-	3.25 ( 82.55)
4	.734 (18.64)	.561 (14.25)	.625-24 UNEF	3.41 ( 86.61)	-	3.78 ( 96.01)
5	.734 (18.64)	.561 (14.25)	.750-20 UNEF	3.05 ( 77.47)	-	3.42 ( 86.87)
6	.858 (21.79)	.625 (15.88)	.625-24 UNEF	3.52 ( 89.41)	-	3.89 ( 98.81)
7	.858 (21.79)	.625 (15.88)	.750-20 UNEF	3.58 ( 90.93)	-	3.95 (100.33)
8	.858 (21.79)	.625 (15.88)	1.000-20 UNEF	3.86 ( 98.04)	-	4.23 (107.44)
9	.984 (24.99)	.688 (17.48)	.750-20 UNEF	3.71 ( 94.23)	-	4.08 (103.63)
10	.984 (24.99)	.688 (17.48)	1.000-20 UNEF	3.74 ( 95.00)	-	4.11 (104.39)
11	1.112 (28.24)	.781 (19.84)	.750-20 UNEF	3.88 ( 98.55)	-	4.25 (107.95)
12	1.112 (28.24)	.781 (19.84)	1.1875-18 UNEF	4.03 (102.36)	-	4.40 (111.76)
13	1.218 (30.94)	.968 (24.59)	1.000-20 UNEF	4.48 (113.79)	-	4.85 (123.19)
14	1.218 (30.94)	.968 (24.59)	1.4375-18 UNEF	4.49 (114.05)	-	4.86 (123.44)
15	1.345 (34.16)	.968 (24.59)	1.000-20 UNEF	4.48 (113.79)	-	4.85 (123.19)
16	1.345 (34.16)	.968 (24.59)	1.4375-18 UNEF	4.49 (114.05)	-	4.86 (123.44)

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	CONNECTOR SHELL SIZE				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	C REF
	AS81703 SERIES 3	MIL-DTL-26482 SERIES 2	MIL-DTL-5015 CRIMP	MIL-DTL-83723 SERIES III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
17	N/A	22	22	22	12	.500 (12.70)	.750 (19.05)	1	2.450 (62.23)	1.059 (26.90)
18					20	.875 (22.23)	1.029 (26.14)	1	2.093 (53.16)	1.375 (34.93)
19	N/A	24	24	24	12	.500 (12.70)	.750 (19.05)	1	2.450 (62.23)	1.059 (26.90)
20					20	.875 (22.23)	1.144 (29.06)	1	2.093 (53.16)	1.375 (34.93)
21	N/A	N/A	28	N/A	16	.625 (15.88)	.937 (23.80)	1	2.500 (63.50)	1.156 (29.36)
22					24	1.000 (25.40)	1.375 (34.93)	1	2.156 (54.76)	1.500 (38.10)
23					16	.625 (15.88)	.937 (23.80)	1	2.600 (66.04)	1.156 (29.36)
24					20	.875 (22.23)	1.250 (31.75)	1	2.600 (66.04)	1.375 (34.93)
25					28	1.250 (31.75)	1.625 (41.28)	1	2.250 (57.15)	1.781 (45.24)
26					16	.625 (15.88)	.937 (23.80)	1	2.690 (68.33)	1.156 (29.36)
27			24		1.000 (25.40)	1.375 (34.93)	1	2.690 (68.33)	1.500 (38.10)	
28			32		1.437 (36.50)	1.840 (46.74)	1	2.344 (59.54)	1.830 (46.48)	
29			16		.625 (15.88)	.937 (23.80)	1	2.690 (68.33)	1.156 (29.36)	
30			24		1.000 (25.40)	1.375 (34.93)	1	2.690 (68.33)	1.500 (38.10)	
31			32		1.437 (36.50)	1.875 (47.63)	1	2.344 (59.54)	1.830 (46.48)	

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	D DIA MAX	E ±.125	V THREAD CLASS 2A	F MAX	G DIA MAX	H MAX
17	1.468 (37.29)	1.063 (27.00)	1.1875-18 UNEF	4.81 (122.17)	—	5.18 (131.57)
18	1.468 (37.29)	1.063 (27.00)	1.750-18 UNS	4.98 (126.49)	—	5.35 (135.89)
19	1.593 (40.46)	1.063 (27.00)	1.1875-18 UNEF	4.81 (122.17)	—	5.18 (131.57)
20	1.593 (40.46)	1.063 (27.00)	1.750-18 UNS	4.98 (126.49)	—	5.35 (135.89)
21	1.969 (50.01)	1.188 (30.18)	1.4375-18 UNEF	5.11 (129.79)	—	5.64 (143.26)
22	1.969 (50.01)	1.188 (30.18)	2.000-18 UNS	5.09 (129.29)	—	5.62 (142.75)
23	2.219 (56.36)	1.250 (31.75)	1.4375-18 UNEF	5.24 (133.10)	—	5.77 (146.56)
24	2.219 (56.36)	1.250 (31.75)	1.750-18 UNS	5.52 (140.21)	—	6.05 (153.67)
25	2.219 (56.36)	1.250 (31.75)	2.250-16 UN	5.73 (145.54)	—	6.26 (159.00)
26	2.469 (62.71)	1.281 (32.54)	1.4375-18 UNEF	5.33 (135.38)	—	5.86 (148.84)
27	2.469 (62.71)	1.281 (32.54)	2.000-18 UNS	5.56 (141.22)	—	6.09 (154.69)
28	2.469 (62.71)	1.281 (32.54)	2.500-16 UN	5.95 (151.13)	—	6.48 (164.59)
29	2.719 (69.06)	2.031 (51.59)	1.4375-18 UNEF	6.08 (154.43)	—	6.61 (167.89)
30	2.719 (69.06)	2.031 (51.59)	2.000-18 UNS	6.31 (160.27)	—	6.84 (173.74)
31	2.719 (69.06)	2.031 (51.59)	2.500-16 UN	6.70 (170.18)	—	7.23 (183.64)

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	CONNECTOR SHELL SIZE				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	C REF		
	AS81703 SERIES 3	MIL-DTL-26482 SERIES 2	MIL-DTL-5015 CRIMP	MIL-DTL-83723 SERIES III		WIRE BUNDLE ACCOMMODATION RANGE						
						MIN	MAX					
32	N/A	N/A	44	N/A	16	.625 (15.88)	.937 (23.80)	1	2.690 (68.33)	1.156 (29.36)		
33					24	1.000 (25.40)	1.375 (34.93)	1	2.690 (68.33)	1.500 (38.10)		
34					32	1.437 (36.50)	1.875 (47.63)	1	2.344 (59.54)	1.830 (46.48)		
35					16	.625 (15.88)	.937 (23.80)	1	2.690 (68.33)	1.156 (29.36)		
36			24		1.000 (25.40)	1.375 (34.93)	1	2.690 (68.33)	1.500 (38.10)			
37			32		1.437 (36.50)	1.875 (47.63)	1	2.344 (59.54)	1.830 (46.48)			
38			61		N/A	N/A	12	.500 (12.70)	.750 (19.05)	1	2.450 (62.23)	1.059 (26.90)
39							20	.875 (22.23)	1.184 (30.07)	1	2.093 (53.16)	1.375 (34.93)
40	19	16	16, 16S	16	10	.350 ( 8.89)	.625 (15.88)	1	2.110 (53.59)	1.027 (26.09)		
41	27	18	18	18	4	.125 ( 3.18)	.312 ( 7.92)	1	2.300 (58.42)	1.027 (26.09)		
42					6	.250 ( 6.35)	.437 (11.10)	1	2.300 (58.42)	1.027 (26.09)		
43	37	20	20	20	6	.250 ( 6.35)	.437 (11.10)	1	2.300 (58.42)	1.027 (26.09)		
44	N/A	22	22	22	4	.125 ( 3.18)	.312 ( 7.92)	1	2.450 (62.23)	1.027 (26.09)		
45					6	.250 ( 6.35)	.437 (11.10)	1	2.450 (62.23)	1.027 (26.09)		
46					10	.350 ( 8.89)	.625 (15.88)	1	2.450 (62.23)	1.027 (26.09)		

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	D DIA MAX	E ±.125	V THREAD CLASS 2A	F MAX	G DIA MAX	H MAX
32	2.969 (75.41)	2.031 (51.59)	1.437-18 UNEF	6.08 (154.43)	-	6.61 (167.89)
33	2.969 (75.41)	2.031 (51.59)	2.000-18 UNS	6.31 (160.27)	-	6.84 (173.74)
34	2.969 (75.41)	2.031 (51.59)	2.500-16 UN	6.70 (170.18)	-	7.23 (183.64)
35	3.219 (81.76)	2.031 (51.59)	1.437-18 UNEF	6.08 (154.43)	-	6.61 (167.89)
36	3.219 (81.76)	2.031 (51.59)	2.000-18 UNS	6.31 (160.27)	-	6.84 (173.74)
37	3.219 (81.76)	2.031 (51.59)	2.500-16 UN	6.70 (170.18)	-	7.23 (183.64)
38	1.653 (41.99)	1.063 (27.00)	1.1875-18 UNEF	4.81 (122.17)	-	5.18 (131.57)
39	1.653 (41.99)	1.063 (27.00)	1.750-18 UNS	4.98 (126.49)	-	5.35 (135.89)
40	1.112 (28.24)	.781 (19.84)	1.000-20 UNEF	4.16 (105.66)	-	4.53 (115.06)
41	1.218 (30.94)	.968 (24.59)	.625-24 UNEF	4.13 (104.90)	-	4.50 (114.30)
42	1.218 (30.94)	.968 (24.59)	.750-20 UNEF	4.20 (106.68)	-	4.57 (116.08)
43	1.345 (34.16)	.968 (24.59)	.750-20 UNEF	4.20 (106.68)	-	4.57 (116.08)
44	1.468 (37.29)	1.063 (27.00)	.625-24 UNEF	4.34 (110.24)	-	4.71 (119.63)
45	1.468 (37.29)	1.063 (27.00)	.750-20 UNEF	4.40 (111.76)	-	4.77 (121.16)
46	1.593 (40.46)	1.063 (27.00)	1.000-20 UNEF	4.68 (118.87)	-	5.05 (128.27)

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	CONNECTOR SHELL SIZE				CLAMP SIZE	A (SEE NOTE 6)				STYLE	B ±.125	C REF	
	AS81703 SERIES 3	MIL-DTL-26482 SERIES 2	MIL-DTL-5015 CRIMP	MIL-DTL-83723 SERIES III		WIRE BUNDLE ACCOMMODATION RANGE							
						MIN	MAX	MIN	MAX				
47	N/A	N/A	36	N/A	12	.500 (12.70)	.750 (19.05)	1	2.690 (68.33)	1.059 (26.90)			
48			40		12	.500 (12.70)	.750 (19.05)	1	2.690 (68.33)	1.059 (26.90)			
49		10	10S, 10SL	10	6	.250 (6.35)	.437 (11.10)	2	1.910 (48.51)	1.027 (26.09)			
50	12	14	14, 14S	14	12	.500 (12.70)	.750 (19.05)	2	2.300 (58.42)	1.059 (26.90)			
51	19	16	16, 16S	16	16	.625 (15.88)	.937 (23.80)	2	2.450 (62.23)	1.156 (29.36)			
52	27	18	18	18	12	.500 (12.70)	.750 (19.05)	1	2.300 (58.42)	1.059 (26.90)			
53	61	N/A	N/A	N/A	16	.625 (15.88)	.937 (23.80)	1	2.450 (62.23)	1.156 (29.36)			
54	37	20	20	20	12	.500 (12.70)	.750 (19.05)	1	2.300 (58.42)	1.059 (26.90)			
55					20	.875 (22.23)	1.250 (31.75)	2	2.500 (63.50)	1.375 (34.93)			
56	N/A	22	22	22	10	.350 (8.89)	.625 (15.88)	1	2.450 (62.23)	1.027 (26.09)			
57					16	.625 (15.88)	.937 (23.80)	1	2.450 (62.23)	1.156 (29.36)			
58					20	.875 (22.23)	1.250 (31.75)	2	2.500 (63.50)	1.375 (34.93)			
59					24	24	24	16	.625 (15.88)	.937 (23.80)	1	2.450 (62.23)	1.156 (29.36)
60					N/A	28	N/A	12	.500 (12.70)	.750 (19.05)	1	2.500 (63.50)	1.059 (26.90)

TABLE 1- DIMENSIONS (CONTINUED)

DASH NO.	D DIA MAX	E ±.125	V THREAD CLASS 2A	F MAX	G DIA MAX	H MAX
47	2.469 (62.71)	1.281 (32.54)	1.1875-18 UNEF	5.20 (132.08)	—	5.73 (145.54)
48	2.719 (69.06)	2.031 (51.59)	1.1875-18 UNEF	5.95 (151.13)	—	6.48 (164.59)
49	.734 (18.64)	1.375 (34.93)	.750-20 UNEF	4.33 (109.98)	.858 (21.79)	4.70 (119.38)
50	.984 (24.99)	1.717 (43.61)	1.1875-18 UNEF	5.36 (136.14)	1.218 (30.94)	5.73 (145.54)
51	1.112 (28.24)	1.812 (46.02)	1.4375-18 UNEF	5.70 (144.78)	1.468 (37.29)	6.07 (154.18)
52	1.218 (30.94)	.968 (24.59)	1.1875-18 UNEF	4.61 (117.09)	—	4.98 (126.49)
53	1.653 (41.99)	1.063 (27.00)	1.4375-18 UNEF	4.95 (125.73)	—	5.32 (135.13)
54	1.345 (34.16)	.968 (24.59)	1.1875-18 UNEF	4.61 (117.09)	—	4.98 (126.49)
55	1.345 (34.16)	1.963 (49.86)	1.750-18 UNS	6.14 (155.96)	1.969 (50.01)	6.51 (165.35)
56	1.468 (37.29)	1.063 (27.00)	1.000-20 UNEF	4.68 (118.87)	—	5.05 (128.27)
57	1.468 (37.29)	1.063 (27.00)	1.4375-18 UNEF	4.95 (125.73)	—	5.32 (135.13)
58	1.468 (37.29)	1.936 (49.17)	1.750-18 UNS	6.14 (155.96)	1.969 (50.01)	6.51 (165.35)
59	1.593 (40.46)	1.063 (27.00)	1.4375-18 UNEF	4.95 (125.73)	—	5.32 (135.13)
60	1.969 (50.01)	1.188 (30.18)	1.1875-18 UNEF	4.97 (126.24)	—	5.50 (139.70)

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	CONNECTOR SHELL SIZE				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	C REF
	AS81703 SERIES 3	MIL-DTL-26482 SERIES 2	MIL-DTL-5015 CRIMP	MIL-DTL-83723 SERIES III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
61	N/A	N/A	28	N/A	20	.875 (22.23)	1.250 (31.75)	1	2.500 (63.50)	1.375 (34.93)
62			32		24	1.000 (25.40)	1.375 (34.93)	1	2.600 (66.04)	1.500 (38.10)
63			36		20	.875 (22.23)	1.250 (31.75)	1	2.690 (68.33)	1.375 (34.93)
64					28	1.250 (31.75)	1.625 (41.28)	1	2.690 (68.33)	1.781 (45.24)
65			40		20	.875 (22.23)	1.250 (31.75)	1	2.690 (68.33)	1.375 (34.93)
66					28	1.250 (31.75)	1.625 (41.28)	1	2.690 (68.33)	1.781 (45.24)
67			44		20	.875 (22.23)	1.250 (31.75)	1	2.690 (68.33)	1.375 (34.93)
68					28	1.250 (31.75)	1.625 (41.28)	1	2.690 (68.33)	1.781 (45.24)
69					48	20	.875 (22.23)	1.250 (31.75)	1	2.690 (68.33)
70			28			1.250 (31.75)	1.625 (41.28)	1	2.690 (68.33)	1.781 (45.24)
71			7		12	12, 12S	12	10	.350 ( 8.89)	.625 (15.88)
72	27	18	18	18	16	.625 (15.88)	.937 (23.80)	2	2.450 (62.23)	1.156 (29.36)
73	N/A	24	24	24	20	.875 (22.23)	1.250 (31.75)	2	2.500 (63.50)	1.375 (34.93)
74	12	14	14, 14S	14	4	.125 ( 3.18)	.312 ( 7.92)	1	2.000 (50.80)	1.027 (26.09)
75	19	16	16, 16S	16	4	.125 ( 3.18)	.312 ( 7.92)	1	2.110 (53.59)	1.027 (26.09)

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	D DIA MAX	E ±.125	V THREAD CLASS 2A	F MAX	G DIA MAX	H MAX
61	1.969 (50.01)	1.188 (30.18)	1.750-18 UNS	5.39 (136.91)	-	5.92 (150.37)
62	2.219 (56.36)	1.250 (31.75)	2.000-18 UNS	5.47 (138.94)	-	6.00 (152.40)
63	2.469 (62.71)	1.281 (32.54)	1.750-18 UNS	5.62 (142.75)	-	6.15 (156.21)
64	2.469 (62.71)	1.281 (32.54)	2.250-16 UN	6.08 (154.43)	-	6.61 (167.89)
65	2.719 (69.06)	2.031 (51.59)	1.750-18 UNS	6.37 (161.80)	-	6.90 (175.26)
66	2.719 (69.06)	2.031 (51.59)	2.250-16 UN	6.83 (173.48)	-	7.36 (186.94)
67	2.969 (75.41)	2.031 (51.59)	1.750-18 UNS	6.37 (161.80)	-	6.90 (175.26)
68	2.969 (75.41)	2.031 (51.59)	2.250-16 UN	6.83 (173.48)	-	7.36 (186.94)
69	3.219 (81.76)	2.031 (51.59)	1.750-18 UNS	6.37 (161.80)	-	6.90 (175.26)
70	3.219 (81.76)	2.031 (51.59)	2.250-16 UN	6.83 (173.48)	-	7.36 (186.94)
71	.858 (21.79)	1.529 (38.84)	1.000-20 UNEF	4.90 (124.46)	1.112 (28.24)	5.27 (133.86)
72	1.218 (30.94)	1.812 (46.02)	1.4375-18 UNEF	5.69 (144.53)	1.468 (37.29)	6.06 (153.92)
73	1.593 (40.46)	1.936 (49.17)	1.750-18 UNS	6.13 (155.70)	1.969 (50.01)	6.50 (165.10)
74	.984 (24.99)	.688 (17.48)	.625-24 UNEF	3.64 ( 92.46)	-	4.01 (101.85)
75	1.112 (28.24)	.781 (19.84)	.625-24 UNEF	3.81 ( 96.77)	-	4.18 (106.17)