

REV.
B

SAE AS85049/89

FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISED TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT / INDUSTRY AND INCORPORATED THE AS85049/89A-A1 AMENDMENT. ALIGN SPECIFICATION WITH SAE GUIDELINES AND REVIEWED SPECIFICATION FOR KNOWN TECHNICAL ISSUES.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HERIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF SAE AS85049.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


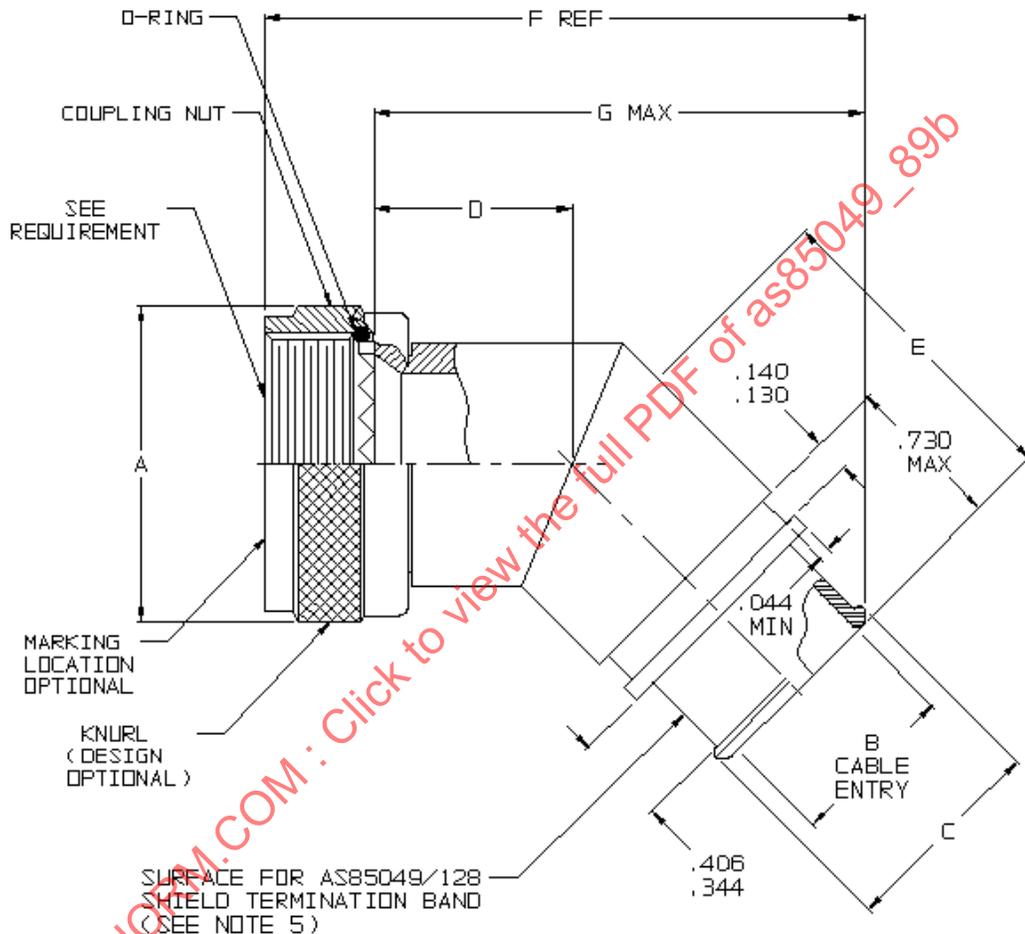


FIGURE 1 - CONFIGURATION AND DIMENSIONS

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85049/89B>

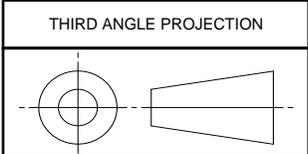

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT INFORMATION: AS85049

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 45°, SELF-LOCKING, SHIELD BAND TERMINATION (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-38999 SERIES III AND IV CONNECTORS)

SAE AS85049/89
SHEET 1 OF 4

REV. B

Copyright 2011 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA) Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2000-06 REVISED 2011-01

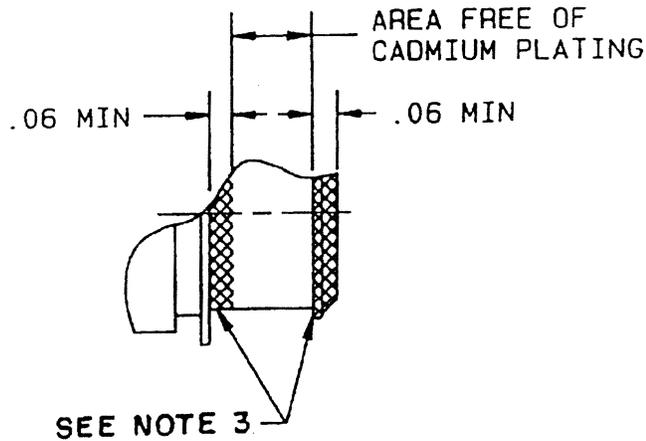


FIGURE 2 - SELECTIVE PLATING (SEE NOTE 3)

TABLE 1 – FIGURE 1, SHELL SIZE AND DIMENSIONS

ACCESSORY SHELL SIZE	SHELL SIZE CODE (REF)	A MAX DIA	B DIA ±.010 ENTRY SIZE		C DIA REF		D MAX DIM	E MAX DIM	G MAX C DIA		F REF C DIA	
			02	03	02	03			02	03	02	03
9	A	.858 (21.8)	N/A	.250 (6.4)	N/A	.395 (10.0)	1.01 (25.7)	1.16 (29.5)	N/A	1.970 (50.0)	N/A	2.218 (56.3)
11	B	.984 (25.0)	N/A	.312 (7.9)	N/A	.457 (11.6)	1.03 (26.2)	1.19 (30.2)	N/A	2.033 (51.6)	N/A	2.281 (57.9)
13	C	1.157 (29.4)	.312 (7.9)	.438 (11.1)	.457 (11.6)	.583 (14.8)	1.06 (26.9)	1.21 (30.7)	2.077 (52.8)	2.122 (53.9)	2.325 (59.1)	2.370 (60.2)
15	D	1.279 (32.5)	.438 (11.1)	.562 (14.3)	.583 (14.8)	.707 (18.0)	1.08 (27.4)	1.24 (31.5)	2.163 (54.9)	2.207 (56.1)	2.411 (61.2)	2.455 (62.4)
17	E	1.406 (35.7)	.500 (12.7)	.625 (15.9)	.645 (16.4)	.770 (19.6)	1.11 (28.2)	1.26 (32.0)	2.229 (56.6)	2.273 (57.7)	2.477 (62.9)	2.521 (64.0)
19	F	1.516 (38.5)	.625 (15.9)	.750 (19.1)	.770 (19.6)	.895 (22.7)	1.12 (28.4)	1.27 (32.3)	2.290 (58.2)	2.334 (59.3)	2.538 (64.5)	2.582 (65.6)
21	G	1.642 (41.7)	.625 (15.9)	.812 (20.6)	.770 (19.6)	.957 (24.3)	1.15 (29.2)	1.30 (33.0)	2.341 (59.5)	2.408 (61.2)	2.589 (65.8)	2.656 (67.5)
23	H	1.768 (44.9)	.688 (17.5)	.938 (23.8)	.829 (21.1)	1.083 (27.5)	1.17 (29.7)	1.33 (33.8)	2.404 (61.1)	2.493 (63.3)	2.652 (67.4)	2.741 (69.6)
25	J	1.889 (48.0)	.750 (19.1)	1.000 (25.4)	.895 (22.7)	1.145 (29.1)	1.20 (30.5)	1.35 (34.3)	2.471 (62.8)	2.559 (65.0)	2.719 (69.1)	2.807 (71.3)

NOTES:

- DIMENSIONS ARE IN INCHES.
- METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1.00 INCH = 25.4 MM.
- CADMIUM/NICKEL INTERFACE SHALL BE COATED WITH POLYSULFIDE SEALANT.
- PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING. OPTION 'N' IS A FREE SPINNING SELF-LOCKING COUPLING.
- RIBBED, KNURL OR SURFACE ROUGHNESS 125-250 IN ACCORDANCE WITH ANSI B46.1

REQUIREMENTS:

DESIGN AND CONSTRUCTION:

1. DIMENSIONS AND CONFIGURATION: SEE FIGURE 1 AND TABLE 1.
2. INTERFACE DIMENSIONS: SHALL CONFORM TO SAE AS85049 FIGURE 3.
3. COUPLING NUT: SHALL BE CAPTIVATED TO THE ADAPTER BODY AND ROTATEABLE.
4. MATERIAL AND FINISH: IN ACCORDANCE WITH SAE AS85049 AND TABLE 2 HEREIN.

TABLE 2 - MATERIAL AND FINISH

FINISH	MATERIAL
G – ELECTROLESS NICKEL <u>1/</u> (SPACE GRADE) N – ELECTROLESS NICKEL <u>1/</u> P – CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL, (SELECTIVE PLATING, SEE FIGURE 2) <u>2/</u> W – CADMIUM OLIVE DRAB <u>2/</u> X – NICKEL FLUOROCARBON POLYMER Z – ZINC NICKEL <u>2/</u> YP – PURE DENSE ELECTRODEPOSITED ALUMINUM, (SELECTIVE PLATING, SEE FIGURE 2) ZP – ZINC NICKEL (SELECTIVE PLATING, SEE FIGURE 2) <u>2/</u>	ALUMINUM ALLOY
J – CADMIUM OLIVE DRAB <u>2/</u> L – CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL, (SELECTIVE PLATING, SEE FIGURE 2) <u>2/ 3/</u> M – ELECTROLESS NICKEL XC – NICKEL FLUOROCARBON POLYMER YL – PURE DENSE ELECTRODEPOSITED ALUMINUM, (SELECTIVE PLATING, SEE FIGURE 2) <u>3/</u> ZC – ZINC NICKEL <u>2/</u> ZL – ZINC NICKEL (SELECTIVE PLATING, SEE FIGURE 2) <u>2/ 3/</u>	COMPOSITE

1/ G AND N FINISH NOT FOR NAVY USE, RESTRICTED TO AIR FORCE SPACE APPLICATIONS ONLY.

2/ P, W, Z, ZP, J, L, ZC AND ZL FINISHES ARE NOT FOR USE IN SPACE APPLICATIONS. ALSO SEE SPECIFICATION NOTE.

3/ MUST MEET THE REQUIREMENTS AND PASS TESTS FOR FINISH J.

PART OR IDENTIFYING NUMBER (PIN):

EXAMPLE:

