

REV. B

SAE AS85049/90

FEDERAL SUPPLY CLASS  
5970

RATIONALE

THIS REVISION IS REQUIRED TO INCORPORATE THE OUTSTANDING AMENDMENT, REVIEW FOR KNOWN TECHNICAL ISSUES AND UPDATE TO MEET SAE FORMAT GUIDELINES.

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF SAE AS85049.


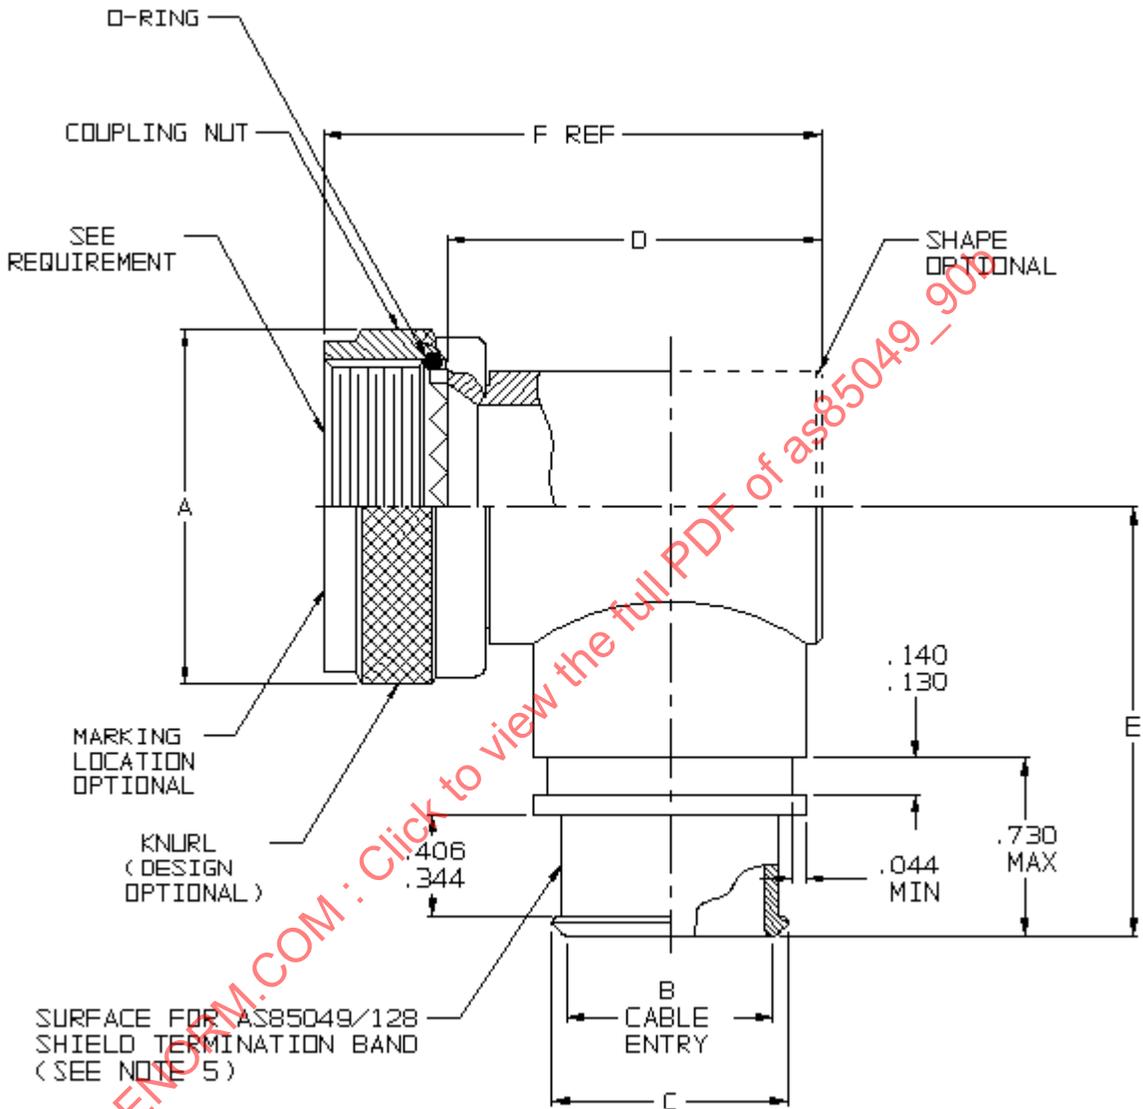


FIGURE 1 - CONFIGURATION AND DIMENSIONS

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85049/90B>

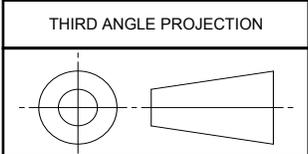

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS85049

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 90°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-38999 SERIES III AND IV CONNECTORS)

**SAE AS85049/90**  
SHEET 1 OF 4

**REV. B**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 2000-06  
REVISED 2011-04

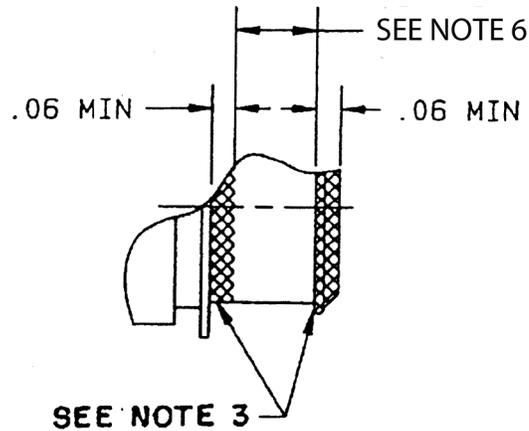


FIGURE 2 - SELECTIVE PLATING

INCH	MM	INCH	MM	INCH	MM	INCH	MM
.044	1.12	.562	14.27	.829	21.06	1.157	29.39
.130	3.30	.583	14.81	.858	21.79	1.279	32.49
.140	3.56	.625	15.88	.895	22.73	1.350	34.29
.250	6.35	.684	17.37	.938	23.83	1.406	35.71
.312	7.92	.707	17.96	.957	24.31	1.516	38.51
.395	10.03	.730	18.54	.984	24.99	1.642	41.71
.438	11.13	.750	19.05	1.000	25.40	1.768	44.91
.457	11.61	.770	19.56	1.083	27.51	1.889	47.98
.500	12.70	.812	20.62	1.145	29.08		

NOTES:

1. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1.00 (25.4 mm).
3. CADMIUM, ZINC NICKEL OR PURE DENSE ELECTRODEPOSITED ALUMINUM/NICKEL INTERFACE SHALL BE COATED WITH POLYSULFIDE SEALANT. NOT APPLICABLE FOR FINISH 'L'.
4. PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING, WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING. OPTION 'N' IS A FREE SPINNING SELF-LOCKING COUPLING.
5. RIBBED, INTERNAL KNURL OR SURFACE ROUGHNESS Ra 125-250 IN ACCORDANCE WITH ANSI B46.1. SEE FIGURE 2 FOR SELECTIVE PLATING DETAILS.
6. AREA FREE OF CADMIUM, ZINC NICKEL OR PURE DENSE ELECTRODEPOSITED ALUMINUM, AS APPLICABLE.

SAE NORM. COUN. Click to view the full PDF of AS85049-90b

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS85049/90</b> SHEET 2 OF 4	<b>REV.</b> <b>B</b>
	(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 90°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-38999 SERIES III AND IV CONNECTORS)		

TABLE 1 - SHELL SIZE AND DIMENSIONS

ACCESSORY SHELL SIZE	SHELL SIZE CODE	A MAX DIA	B DIA ±.010 ENTRY SIZE		C DIA REF		D MAX DIA	E MAX DIA	F (REF)
			02	03	02	03			
9	A	.858 (21.79)	N/A	.250 (6.35)	N/A	.395 (10.03)	1.375 (34.93)	1.417 (35.99)	1.623 (41.22)
11	B	.984 (24.99)	N/A	.312 (7.92)	N/A	.457 (11.61)	1.437 (36.50)	1.480 (37.59)	1.685 (42.80)
13	C	1.157 (29.39)	.312 (7.92)	.438 (11.13)	.457 (11.61)	.583 (14.81)	1.562 (39.67)	1.553 (39.45)	1.810 (45.97)
15	D	1.279 (32.49)	.438 (11.13)	.562 (14.27)	.583 (14.81)	.707 (17.96)	1.687 (42.85)	1.614 (41.00)	1.935 (49.15)
17	E	1.406 (35.71)	.500 (12.70)	.625 (15.88)	.645 (16.38)	.770 (19.56)	1.750 (44.45)	1.678 (42.62)	1.998 (50.75)
19	F	1.516 (38.51)	.625 (15.88)	.750 (19.05)	.770 (19.56)	.895 (22.73)	1.875 (47.63)	1.773 (45.03)	2.123 (53.92)
21	G	1.642 (41.71)	.625 (15.88)	.812 (20.62)	.770 (19.56)	.957 (24.31)	1.938 (49.23)	1.796 (45.62)	2.186 (55.52)
23	H	1.768 (44.91)	.688 (17.48)	.938 (23.83)	.829 (21.06)	1.083 (27.51)	2.062 (52.37)	1.859 (47.22)	2.310 (58.67)
25	J	1.889 (47.98)	.750 (19.05)	1.000 (25.40)	.895 (22.73)	1.145 (29.08)	2.125 (53.98)	1.919 (48.74)	2.373 (60.27)

REQUIREMENTS:

DESIGN AND CONSTRUCTION:

DIMENSIONS AND CONFIGURATION: SEE FIGURE 1 AND TABLE 1.

INTERFACE DIMENSIONS: SHALL CONFORM TO SAE AS85049, FIGURE 3.

COUPLING NUT: SHALL BE CAPTIVATED TO THE ADAPTER BODY AND ROTATABLE.

MATERIAL AND FINISH: IN ACCORDANCE WITH SAE AS85049 AND TABLE 2.

TABLE 2 - MATERIAL AND FINISH

FINISH	MATERIAL
G – ELECTROLESS NICKEL <u>1/</u> (SPACE GRADE) N – ELECTROLESS NICKEL <u>1/</u> P – CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL, (SELECTIVE PLATING, SEE FIGURE 2) <u>2/</u> W – CADMIUM OLIVE DRAB <u>2/</u> X – NICKEL FLUOROCARBON POLYMER Z – ZINC NICKEL <u>2/</u> YP – PURE DENSE ELECTRODEPOSITED ALUMINUM OVER ELECTROLESS NICKEL (SELECTIVE PLATING, SEE FIGURE 2) ZP – ZINC NICKEL OVER ELECTROLESS NICKEL (SELECTIVE PLATING, SEE FIGURE 2) <u>2/</u>	ALUMINUM ALLOY IN ACCORDANCE WITH SAE AS85049
J – CADMIUM OLIVE DRAB <u>2/</u> L – CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL, (SELECTIVE PLATING, SEE FIGURE 2) <u>2/ 3/</u> M – ELECTROLESS NICKEL XC – NICKEL FLUOROCARBON POLYMER YL – PURE DENSE ELECTRODEPOSITED ALUMINUM, SELECTIVE PLATING, SEE FIGURE 2) <u>3/</u> ZC – ZINC NICKEL <u>2/</u> ZL – ZINC NICKEL (SELECTIVE PLATING, SEE FIGURE 2) <u>2/ 3/</u>	COMPOSITE IN ACCORDANCE WITH SAE AS85049

1/ G AND N FINISH NOT FOR NAVY USE, RESTRICTED TO AIR FORCE SPACE APPLICATIONS ONLY.

2/ P, W, Z, ZP, J, L, ZC AND ZL FINISHES ARE NOT FOR USE IN SPACE APPLICATIONS. ALSO SEE SPECIFICATION NOTE

3/ MUST MEET THE REQUIREMENTS AND PASS TESTS FOR FINISH J.