

RATIONALE

AS85421/14C HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

REV.
C

AS85421/14

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


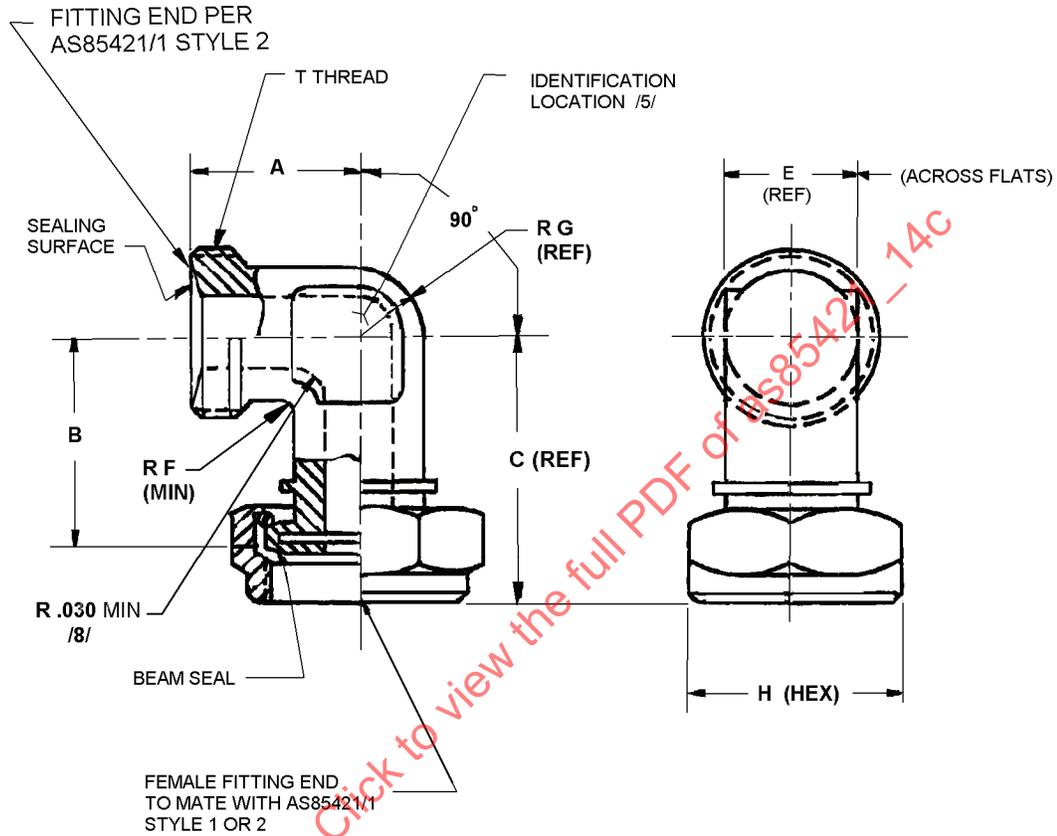


FIGURE 1

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85421/14C>

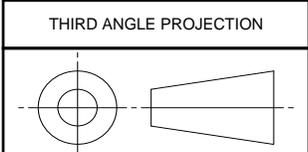

CUSTODIAN: G-3 PROCUREMENT SPECIFICATION: AS85421 /4/

	AEROSPACE STANDARD		AS85421/14 SHEET 1 OF 3	REV. C
	FITTING, ELBOW, 90°, BEAM SEAL, 3000/4000 PSI, MALE TO FEMALE			

ISSUED 2001-05 REVISED 2008-01 REAFFIRMED 2015-04

TABLE 1 - DIMENSIONAL DATA

DASH NO.	TUBE OD	T THREAD AS8879	A	B	C (REF)	E (REF)	F RAD (MIN)	G RAD (REF)	H		MASS. LB/EA, MAX	
									MIN	MAX	TI	CRES
-03	.188	.3750-28UNJS-3A	.575	.702	.873	.375	.042	.188	.496	.503	.026	.045
-04	.250	.4375-24UNJS-3A	.617	.808	1.104	.375	.042	.188	.558	.565	.032	.055
-05	.312	.5000-24UNJS-3A	.653	.850	1.060	.438	.042	.219	.621	.628	.042	.073
-06	.375	.5625-20UNJS-3A	.704	.945	1.178	.500	.042	.250	.684	.691	.054	.095
-08	.500	.7188-20UNJS-3A	.824	1.045	1.294	.562	.070	.281	.871	.878	.087	.151
-10	.625	.8438-18UNJS-3A	.955	1.178	1.485	.688	.070	.344	.996	1.003	.120	.210
-12	.750	1.0000-16UNJ-3A	1.062	1.316	1.659	.875	.098	.438	1.121	1.128	.166	.291
-14	.875	1.1250-16UNJ-3A	1.216	1.514	1.862	1.125	.098	.563	1.359	1.391	.320	.561
-16	1.000	1.2500-14UNJS-3A	1.246	1.529	1.895	1.125	.098	.563	1.484	1.516	.325	.570
-20	1.250	1.5781-14UNJS-3A	1.387	1.847	2.216	1.375	.098	.688	1.859	1.891	.535	.935
-24	1.500	1.8438-14UNJS-3A	1.688	2.171	2.620	1.625	.098	.813	2.105	2.145	.834	1.461

SIZES -20 AND -24 WERE ORIGINALLY DESIGNATED AS SIZES -21 AND -25 ON SOME MANUFACTURER'S DRAWINGS. THESE SIZES WILL NOT CONNECT WITH THE ORIGINAL -20 AND -24 FITTINGS. SEE 6.4 IN THE PROCUREMENT SPECIFICATION FOR ADDITIONAL INFORMATION.

NOTES:

/1/ MATERIAL:

- a. CODE LETTER P - TYPE 17-4PH CORROSION RESISTANT STEEL PER AMS 5643.
- b. CODE LETTER T - TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS 4928 OR AMS 4965.
- c. CODE LETTER V - TYPE 15-5PH, CORROSION RESISTANT STEEL PER AMS 5659.

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER P - CONDITION H1075 PER AMS 2759/3.
- b. MATERIAL CODE LETTER T - NONE.
- c. MATERIAL CODE LETTER V - AGE TO CONDITION H 1075 PER AMS-H-6875 OR AMS 2759/3.

3. FINISH:

- a. MATERIAL CODE LETTER P - PASSIVATE PER AMS 2700, TYPE 6 OR 7
- b. MATERIAL CODE LETTER T - NONE.
- c. MATERIAL CODE LETTER V - PASSIVATE PER AMS 2700, TYPE 6 OR 7.

/4/ PROCUREMENT SPECIFICATION: AS85421 EXCEPT AS SPECIFIED ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST (QPL) PRI-QPL-AS85421 FOR THIS STANDARD. SEE WW.EAUDITNET.COM FOR CURRENT QPL ON-LINE.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D, OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZES O6 OR SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS" AND MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION WHEN MADE FROM FORGING.
- b. FOR SIZES O8 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER AND MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION WHEN MADE FROM FORGING.

	AEROSPACE STANDARD	AS85421/14 SHEET 2 OF 3	REV. C
	FITTING, ELBOW, 90°, BEAM SEAL, 3000/4000 PSI, MALE TO FEMALE		