
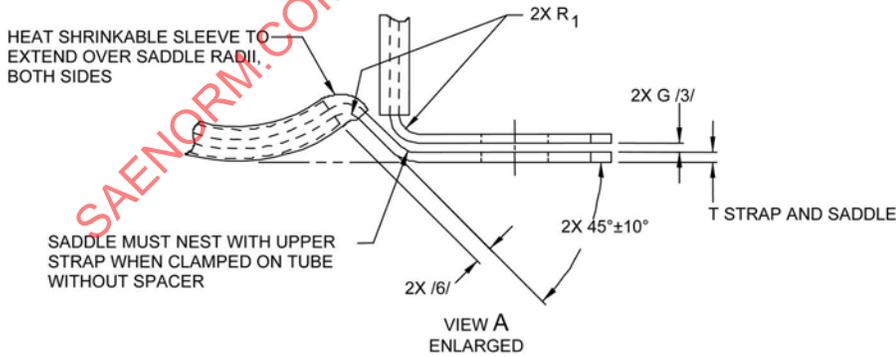
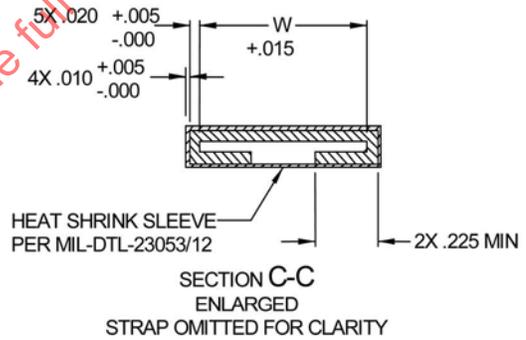
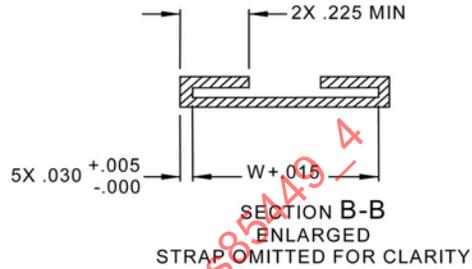
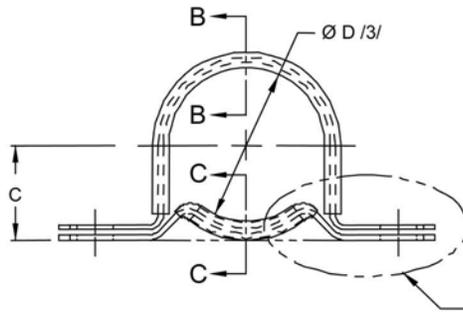



RATIONALE

AS85449/4 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

SAE AS85449/4

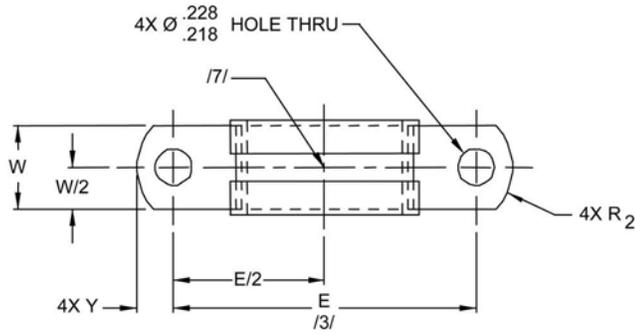

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85449/4>

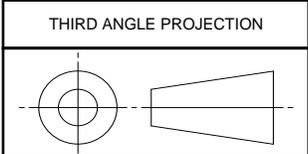

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

CUSTODIAN: G-3/G-3E

PROCUREMENT SPECIFICATION: AS85449 /4/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CLAMP ASSEMBLY, SADDLE TYPE,
CUSHIONED, PTFE

SAE AS85449/4
SHEET 1 OF 3

TABLE 1 - CLAMP DIMENSIONS

BASIC NO. AS85449/4	T									
SIZE CODE	TUBE	C	D	E	G	R ₁	R ₂	TOLERANCE	W	Y
/11/	SIZE	± .030		± .015	± .001		± .03	PER AMS 2242	± .005	
-10	.625	.433	.625	1.525	.020	.090	.37	.040	.500	.218
-12	.750	.495	.750	1.650	.020	.090	.37	.040	.500	.218
-14	.875	.558	.875	1.775	.020	.090	.37	.040	.500	.218
-16	1.000	.640	1.000	1.958	.030	.109	.50	.050	.625	.250
-18	1.125	.703	1.125	2.083	.030	.109	.50	.050	.625	.250
-20	1.250	.765	1.250	2.208	.030	.109	.50	.050	.625	.250
-24	1.500	.890	1.500	2.458	.030	.109	.50	.050	.625	.250
-28	1.750	1.015	1.750	2.708	.030	.109	.50	.050	.625	.250
-32	2.000	1.153	2.000	3.016	.030	.125	.50	.063	.750	.250
-36	2.250	1.278	2.250	3.266	.030	.125	.50	.063	.750	.250
-40	2.500	1.403	2.500	3.516	.030	.125	.50	.063	.750	.250
-44	2.750	1.528	2.750	3.766	.030	.125	.50	.063	.750	.250
-48	3.000	1.653	3.000	4.016	.030	.125	.50	.063	.750	.250

NOTES:

1. MATERIALS: STRAP AND BASE - CRES 321 SHEET PER AMS 5510, EXCEPT THAT A MINIMUM TENSILE STRENGTH OF 100 KSI SHALL BE REQUIRED.
CUSHION - TEFLON SHEET STRIP PER AMS 3652, EXTRUDED AND HEAT FORMED TO SHAPE, COLOR WHITE. SADDLE CUSHION COVERED WITH HEAT SHRINKABLE SLEEVE PER MIL-DTL-23053/12 (SEE SECTION C-C, SHEET 1).
2. FINISH: STRAP AND BASE - PASSIVATE PER AMS-QQ-P-35.
CUSHION - NONE.
- /3/ THE "D" AND "E" DIMENSION WILL BE MEASURED WITH MANDREL CLAMPED AND A "G" DIMENSION THICKNESS SPACER BETWEEN THE CLAMP FEET. "G" DIMENSION IS FOR THICKNESS OF SHIM REQUIRED TO INSPECT ASSEMBLED CLAMP.
- /4/ THIS PRODUCT SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS85449. USERS OF THIS STANDARD SHALL PROCURE THIS PRODUCT FROM ACCREDITED MANUFACTURER(S) OR THEIR ACCREDITED DISTRIBUTOR(S) AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS85449 FOR THE STANDARD.
5. WITH CLAMP ASSEMBLED ON TUBE, NO GAP IS PERMITTED BETWEEN CUSHION AND TUBE FOR UPPER HALF OF STRAP AND CUSHIONED LENGTH OF SADDLE BASE.
- /6/ WITH CUSHION PUSHED TO EITHER END OF STRAP, SUFFICIENT CUSHION SHALL BE AVAILABLE TO PREVENT STRAP FROM CONTACTING TUBE.
- /7/ IDENTIFICATION: MARK THE COMPLETE STANDARD PART NUMBER AND MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE ON STRAP, IN AN AREA NOT COVERED BY THE CUSHION AND SHALL BE VISIBLE PER AS478, METHOD 2A1. THE SADDLE SHALL HAVE THE DASH SIZE IMPRESSION STAMPED IN THE VICINITY OF THE MOUNTING HOLE AWAY FROM ANY BEND RADII.
8. REMOVE ALL BURRS AND SHARP EDGES.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±0° 30'.
10. DIMENSIONING AND TOLERANCING: ASME Y14.5M-1994.