

AS8791/1

## ADOPTION NOTICE

AS8791/1, "RETAINER, PACKING, HYDRAULIC AND PNEUMATIC, POLYTETRAFLUORETHYLENE, SINGLE TURN", was adopted on 9 MARCH 1998 for use by the Department of Defense (DoD). Proposed changes by DoD Activities must be submitted to the DoD Adopting Activity: Defense Industrial Supply Center, ATTN: DISC-EC, 700 Robbins Avenue, Philadelphia, PA 19111-5096. DoD Activities may obtain copies of this standard from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other Government agencies may purchase copies from the SOCIETY OF AUTOMOTIVE ENGINEERS, 400 COMMONWEALTH DRIVE, WARRENDALE, PA 15096-0001.

## Custodians:

Army - MR  
Navy - AS  
Air Force - 99

Adopting activity:  
DLA-IS

(Project 5330-1114)

AMSC N/A

FSC 5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS

**AS8791/1**

**NOTICE**


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-R-8791/1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (a) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, (b) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT, AND (c) THE EXCLUSION OF ANY QUALIFIED PRODUCT LIST (QPL) SECTIONS.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as8791\_1

THIRD ANGLE PROJECTION



ISSUED 1997-10

PREPARED BY SAE SUBCOMMITTEE A-6C

**AEROSPACE STANDARD**

RETAINER, PACKING, HYDRAULIC AND PNEUMATIC,  
POLYTETRAFLUOROETHYLENE, SINGLE TURN

**AS8791/1**  
SHEET 1 OF 6



Copyright 1997 Society of Automotive Engineers, Inc.  
All rights reserved.


Printed in the U.S.A.

QUESTIONS REGARDING THIS DOCUMENT: (412) 772-8510  
TO PLACE A DOCUMENT ORDER: (412) 776-4970

FAX: (412) 776-0242  
Distributed under license from the IHS Archive  
FAX: (912) 776-0750

AS8791/1

THE REQUIREMENTS FOR ACQUIRING THE PACKING RETAINERS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF AS8791.

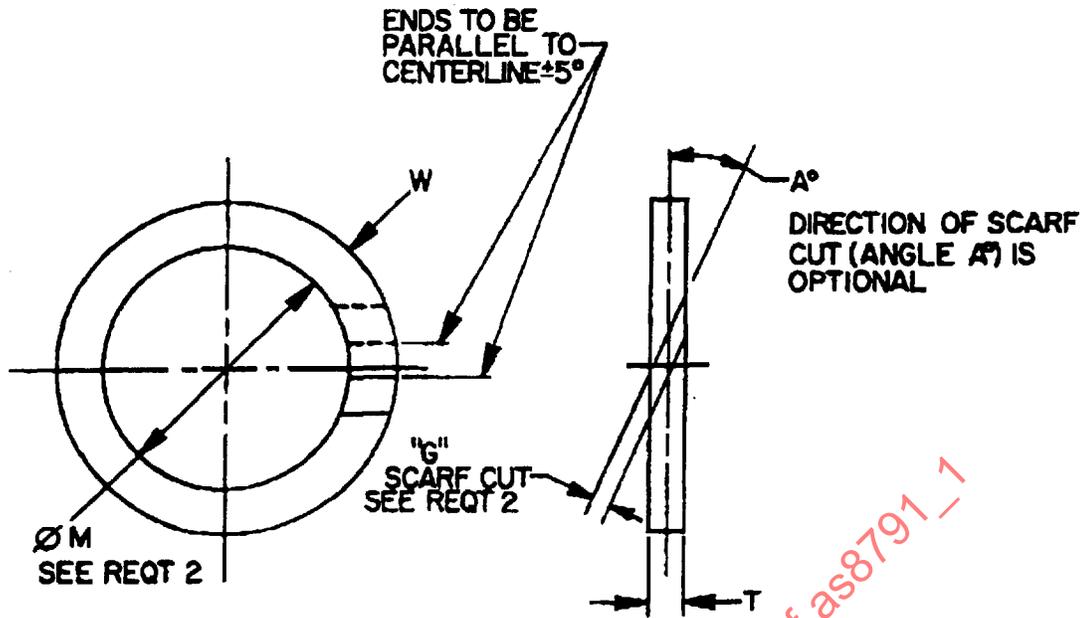

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. FOR USE IN PACKING GROOVES CONFORMING TO MIL-G-5514 AND MIL-P-5514C, D, AND E REVISIONS.

FIGURE 1 - RETAINER, PACKING, HYDRAULIC AND PNEUMATIC, POLYTETRAFLUOROETHYLENE, SINGLE TURN

SAENORM.COM : Click to view the full PDF of as8791\_1

AS8791/1

TABLE 1 - DASH NUMBERS AND DIMENSIONS

DASH NUMBER	øM ±.001	T	W	G	A° (RANGE)
004	.076	.052/.048	.054/.052	.005/.000	39-35
005	.108	.052/.048	.054/.052	.005/.000	29-27
006	.123	.052/.048	.054/.052	.005/.000	26-24
007	.154	.052/.048	.054/.052	.005/.000	20-19
008	.185	.052/.048	.054/.052	.005/.000	22-19
009	.217	.052/.048	.054/.052	.005/.000	22-19
010	.248	.052/.048	.054/.052	.005/.000	22-19
011	.310	.052/.048	.054/.052	.005/.000	22-19
012	.373	.052/.048	.054/.052	.005/.000	22-19
013	.438	.052/.048	.054/.052	.005/.000	22-19
014	.501	.052/.048	.054/.052	.005/.000	22-19
015	.563	.052/.048	.054/.052	.005/.000	22-19
016	.626	.052/.048	.054/.052	.005/.000	22-19
017	.688	.052/.048	.054/.052	.005/.000	22-19
018	.751	.052/.048	.054/.052	.005/.000	22-19
019	.813	.052/.048	.054/.052	.005/.000	22-19
020	.881	.052/.048	.054/.052	.005/.000	22-19
021	.943	.052/.048	.054/.052	.005/.000	22-19
022	1.006	.052/.048	.054/.052	.005/.000	22-19
023	1.068	.052/.048	.054/.052	.005/.000	22-19
024	1.131	.052/.048	.054/.052	.005/.000	22-19
025	1.193	.052/.048	.054/.052	.005/.000	22-19
026	1.256	.052/.048	.054/.052	.005/.000	22-19
027	1.318	.052/.048	.054/.052	.005/.000	22-19
028	1.381	.052/.048	.054/.052	.005/.000	22-19
110	.373	.056/.052	.087/.085	.006/.000	22-19
111	.435	.056/.052	.087/.085	.006/.000	22-19
112	.498	.056/.052	.087/.085	.006/.000	22-19
113	.560	.056/.052	.087/.085	.006/.000	22-19
114	.623	.056/.052	.087/.085	.006/.000	22-19
115	.685	.056/.052	.087/.085	.006/.000	22-19
116	.748	.056/.052	.087/.085	.006/.000	22-19
117	.815	.056/.052	.087/.085	.006/.000	22-19
118	.878	.056/.052	.087/.085	.006/.000	22-19
119	.940	.056/.052	.087/.085	.006/.000	22-19
120	1.003	.056/.052	.087/.085	.006/.000	22-19
121	1.065	.056/.052	.087/.085	.006/.000	22-19
122	1.128	.056/.052	.087/.085	.006/.000	22-19
123	1.190	.056/.052	.087/.085	.006/.000	22-19
124	1.253	.056/.052	.087/.085	.006/.000	22-19
125	1.315	.056/.052	.087/.085	.006/.000	22-19

AS8791/1

TABLE 1 (CONTINUED)

DASH NUMBER	øM ±.001	T	W	G	A° (RANGE)
126	1.380	.056/.052	.087/.085	.006/.000	22-19
127	1.442	.056/.052	.087/.085	.006/.000	22-19
128	1.505	.056/.052	.087/.085	.006/.000	22-19
129	1.564	.056/.052	.087/.085	.006/.000	22-19
130	1.627	.056/.052	.087/.085	.006/.000	22-19
131	1.689	.056/.052	.087/.085	.006/.000	22-19
132	1.752	.056/.052	.087/.085	.006/.000	22-19
133	1.814	.056/.052	.087/.085	.006/.000	22-19
134	1.877	.056/.052	.087/.085	.006/.000	22-19
135	1.940	.056/.052	.087/.085	.006/.000	22-19
136	2.002	.056/.052	.087/.085	.006/.000	22-19
137	2.065	.056/.052	.087/.085	.006/.000	22-19
138	2.127	.056/.052	.087/.085	.006/.000	22-19
139 <sup>1</sup>	2.190	.056/.052	.087/.085	.006/.000	22-19
210	.748	.064/.060	.120/.118	.006/.000	22-19
211	.810	.064/.060	.120/.118	.006/.000	22-19
212	.873	.064/.060	.120/.118	.006/.000	22-19
213	.935	.064/.060	.120/.118	.006/.000	22-19
214	.998	.064/.060	.120/.118	.006/.000	22-19
215	1.060	.064/.060	.120/.118	.006/.000	22-19
216	1.123	.064/.060	.120/.118	.006/.000	22-19
217	1.185	.064/.060	.120/.118	.006/.000	22-19
218	1.248	.064/.060	.120/.118	.006/.000	22-19
219	1.310	.064/.060	.120/.118	.006/.000	22-19
220	1.373	.064/.060	.120/.118	.006/.000	22-19
221	1.435	.064/.060	.120/.118	.006/.000	22-19
222	1.498	.064/.060	.120/.118	.006/.000	22-19
223	1.625	.064/.060	.120/.118	.007/.000	22-19
224	1.750	.064/.060	.120/.118	.007/.000	22-19
225	1.875	.064/.060	.120/.118	.007/.000	22-19
226	2.000	.064/.060	.120/.118	.007/.000	22-19
227	2.125	.064/.060	.120/.118	.007/.000	22-19
228	2.250	.064/.060	.120/.118	.007/.000	22-19
229	2.375	.064/.060	.120/.118	.007/.000	22-19
230 <sup>1</sup>	2.500	.064/.060	.120/.118	.007/.000	22-19
325	1.498	.090/.086	.184/.182	.007/.000	22-19
326	1.623	.090/.086	.184/.182	.007/.000	22-19
327	1.748	.090/.086	.184/.182	.007/.000	22-19
328	1.873	.090/.086	.184/.182	.007/.000	22-19
329	1.998	.090/.086	.184/.182	.007/.000	22-19
330	2.123	.090/.086	.184/.182	.007/.000	22-19
331	2.248	.090/.086	.184/.182	.007/.000	22-19