

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C

AS9058

FEDERAL SUPPLY CLASS
5330

RATIONALE

THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. THIS STANDARD HAS BEEN STABILIZED.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECT TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as9058c

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9058C>



| | | | |
|-----------------|---|---------------------------------|---------------|
| CUSTODIAN: E-25 | | PROCUREMENT SPECIFICATION: NONE | |
| | AEROSPACE STANDARD | | AS9058 |
| | RING - BACK-UP, BOSS CONNECTION, AMS3652, AMS3656, AMS3660, AMS3667 | | |

ISSUED 1998-05 REVISED 2003-06 REAFFIRMED 2007-06 STABILIZED 2015-02

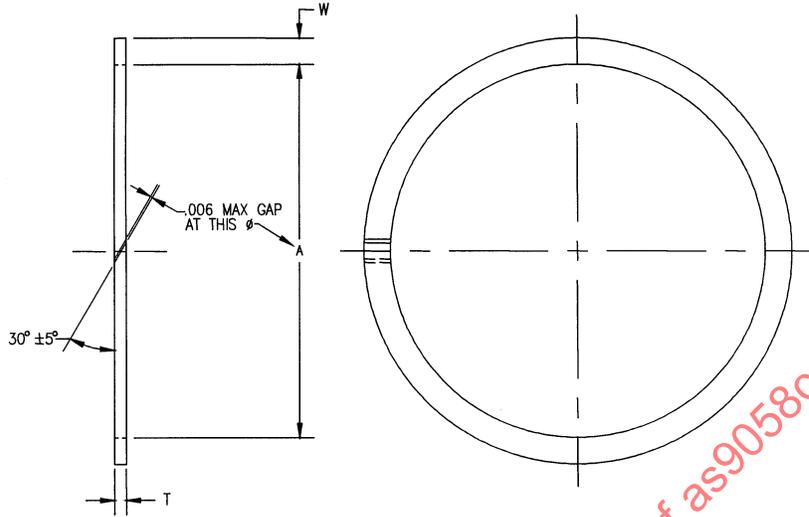


FIGURE 1

TABLE 1 - DIMENSIONS

| PART NO. | NOM TUBE OD | A BASIC | W ±.002 | T ±.004 | APPROX WEIGHT LB/100 |
|-----------|-------------------|------------|------------|------------|----------------------------|
| MS9058-02 | .125 | .246 | .112 | .056 | .056 |
| MS9058-03 | .188 | .309 | .112 | .056 | .066 |
| MS9058-04 | .250 | .360 | .117 | .061 | .085 |
| MS9058-05 | .312 | .423 | .117 | .061 | .096 |
| MS9058-06 | .375 | .478 | .121 | .061 | .110 |
| MS9058-07 | .438 | .549 | .121 | .061 | .120 |
| MS9058-08 | .500 | .656 | .125 | .061 | .149 |
| MS9058-09 | .562 | .718 | .125 | .061 | .162 |
| MS9058-10 | .625 | .769 | .131 | .073 | .216 |
| MS9058-11 | .688 | .878 | .159 | .073 | .300 |
| MS9058-12 | .750 | .941 | .169 | .073 | .342 |
| MS9058-14 | .875 | 1.066 | .169 | .073 | .381 |
| MS9058-16 | 1.000 | 1.191 | .169 | .073 | .419 |
| MS9058-18 | 1.125 | 1.375 | .169 | .073 | .477 |
| MS9058-20 | 1.250 | 1.503 | .169 | .073 | .515 |
| MS9058-24 | 1.500 | 1.752 | .169 | .073 | .592 |
| MS9058-28 | 1.750 | 2.127 | .169 | .073 | .707 |
| MS9058-32 | 2.000 | 2.377 | .169 | .073 | .784 |