

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

**REV.
A**

AS9312

FEDERAL SUPPLY CLASS
5307

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9312B. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.


ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

WARNING

THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM HAS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON THE ENVIRONMENTAL AND HEALTH REGULATIONS REGARDING ITS USE.

SAENORM.COM : Click to view the full PDF of as9312a

THIRD ANGLE PROJECTION

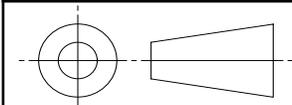

CUSTODIAN: SAE E-25

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) STUD, SHOULDERED, STEPPED, HEX, WRENCHING,
DRILLED, STEEL UNS G87400, CAD, PLATED,
125 KSI MIN, .2500-28 UNF-3A X .3750-24 UNF-3A

AS9312
SHEET 1 OF 7

**REV.
A**

ISSUED 1999-12 REVISED 2004-12

Copyright 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

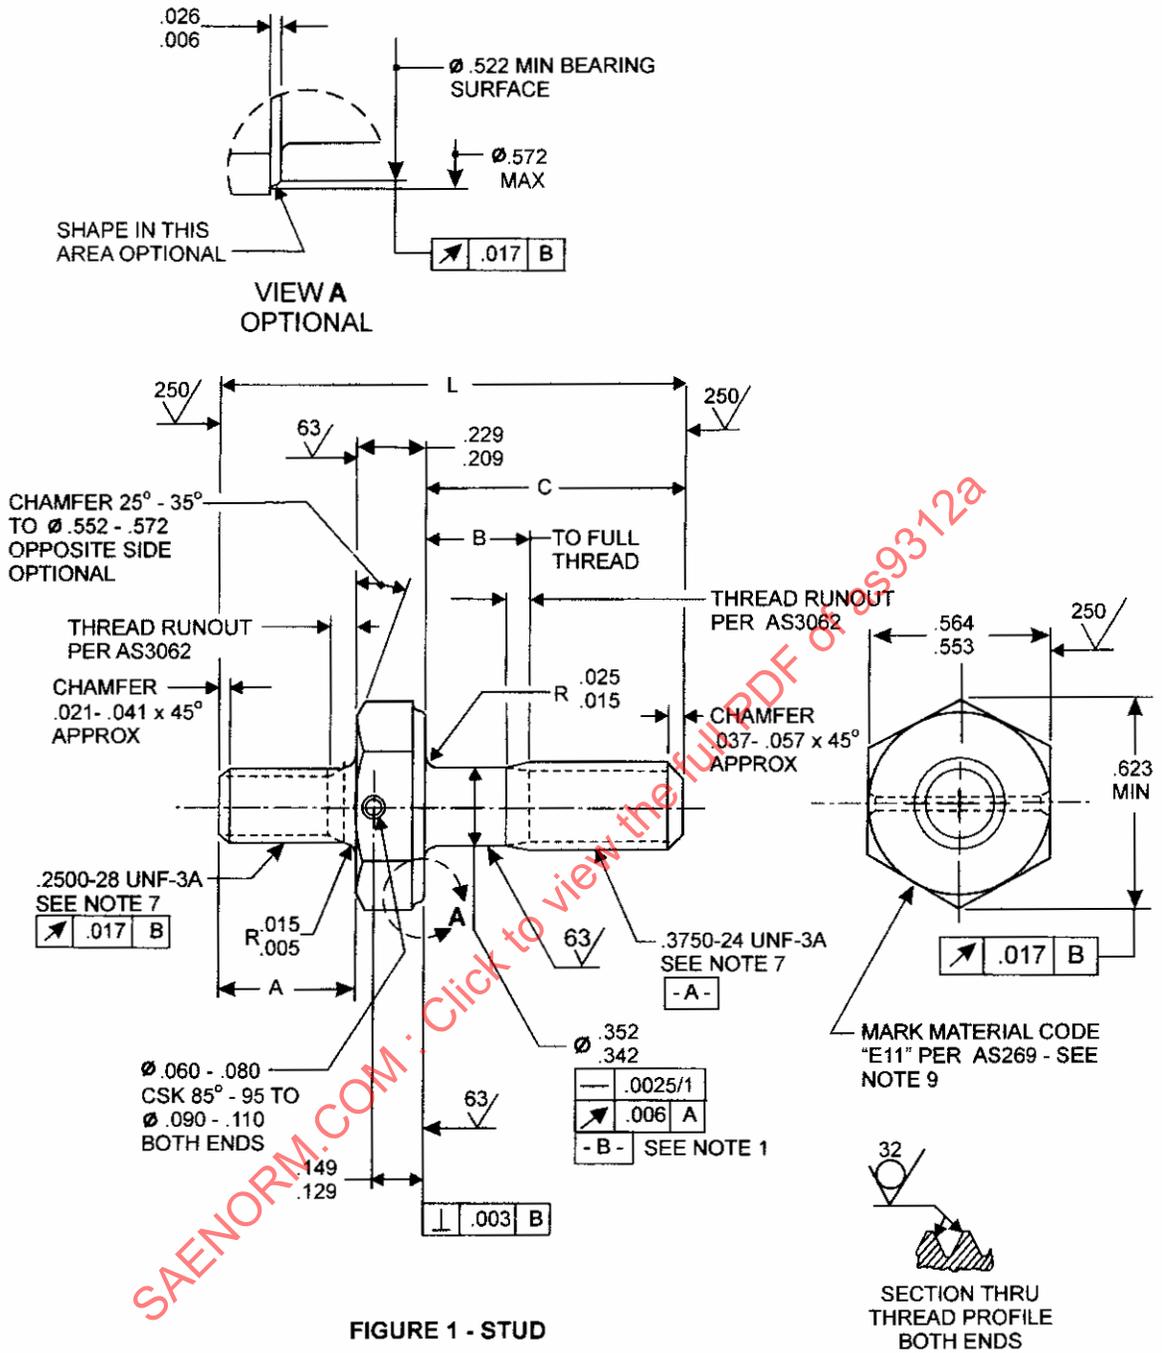


TABLE 1 - PART NUMBERS AND DIMENSIONS.

PART NUMBER	A	B	C	L REF	APPROX. MASS LB/100
MS9312-001	.428 - .448	<u>1/</u>	.740 - .760	1.406	4.14
MS9312-002	.428 - .448	<u>1/</u>	.802 - .822	1.469	4.31
MS9312-003	.428 - .448	<u>1/</u>	.865 - .885	1.531	4.48
MS9312-004	.428 - .448	<u>1/</u>	.928 - .948	1.594	4.65
MS9312-005	.428 - .448	<u>1/</u>	.990 - 1.010	1.656	4.82
MS9312-006	.428 - .448	<u>1/</u>	1.052 - 1.072	1.719	4.99
MS9312-007	.428 - .448	.065 - .125	1.115 - 1.135	1.781	5.16
MS9312-008	.428 - .448	.128 - .188	1.178 - 1.198	1.844	5.33
MS9312-009	.428 - .448	.190 - .250	1.240 - 1.260	1.906	5.50
MS9312-010	.428 - .448	.252 - .312	1.302 - 1.322	1.969	5.67
MS9312-011	.428 - .448	.315 - .375	1.365 - 1.385	2.031	5.84
MS9312-012	.428 - .448	.378 - .438	1.428 - 1.448	2.094	6.01
MS9312-013	.428 - .448	.440 - .500	1.490 - 1.510	2.156	6.18
MS9312-014	.428 - .448	.502 - .562	1.552 - 1.572	2.219	6.35
MS9312-015	.428 - .448	.565 - .625	1.615 - 1.635	2.281	6.52
MS9312-016	.428 - .448	.628 - .688	1.678 - 1.698	2.344	6.69
MS9312-017	.428 - .448	.690 - .750	1.740 - 1.760	2.406	6.86
MS9312-018	.428 - .448	.752 - .812	1.802 - 1.822	2.469	7.03
MS9312-019	.428 - .448	.815 - .875	1.865 - 1.885	2.531	7.20
MS9312-020	.428 - .448	.878 - .938	1.928 - 1.948	2.594	7.37
MS9312-021	.428 - .448	.940 - 1.000	1.990 - 2.010	2.656	7.54
MS9312-022	.428 - .448	1.002 - 1.062	2.052 - 2.072	2.719	7.71
MS9312-023	.428 - .448	1.065 - 1.125	2.115 - 2.135	2.781	7.88
MS9312-024	.428 - .448	1.190 - 1.250	2.240 - 2.260	2.906	8.22
MS9312-025	.428 - .448	1.315 - 1.375	2.365 - 2.385	3.031	8.56
MS9312-026	.428 - .448	1.440 - 1.500	2.490 - 2.510	3.156	8.90
MS9312-027	.428 - .448	1.565 - 1.625	2.615 - 2.635	3.281	9.24
MS9312-028	.428 - .448	1.690 - 1.750	2.740 - 2.760	3.406	9.58
MS9312-029	.428 - .448	1.815 - 1.875	2.865 - 2.885	3.531	9.92
MS9312-030	.428 - .448	1.940 - 2.000	2.990 - 3.010	3.656	10.26

TABLE 1 - PART NUMBERS AND DIMENSIONS. - CONTINUED

PART NUMBER	A	B	C	L REF	APPROX. MASS LB/100
MS9312-050	.490 - .510	<u>1/</u>	.740 - .760	1.469	4.21
MS9312-051	.490 - .510	<u>1/</u>	.802 - .822	1.531	4.38
MS9312-052	.490 - .510	<u>1/</u>	.865 - .885	1.594	4.55
MS9312-053	.490 - .510	<u>1/</u>	.928 - .948	1.656	4.72
MS9312-054	.490 - .510	<u>1/</u>	.990 - 1.010	1.719	4.89
MS9312-055	.490 - .510	<u>1/</u>	1.052 - 1.062	1.781	5.06
MS9312-056	.490 - .510	.065 - .125	1.115 - 1.135	1.844	5.23
MS9312-057	.490 - .510	.128 - .188	1.178 - 1.198	1.906	5.40
MS9312-058	.490 - .510	.190 - .250	1.240 - 1.260	1.969	5.57
MS9312-059	.490 - .510	.252 - .312	1.302 - 1.322	2.031	5.74
MS9312-060	.490 - .510	.315 - .375	1.365 - 1.385	2.094	5.91
MS9312-061	.490 - .510	.378 - .438	1.428 - 1.448	2.156	6.08
MS9312-062	.490 - .510	.440 - .500	1.490 - 1.510	2.219	6.25
MS9312-063	.490 - .510	.502 - .562	1.552 - 1.572	2.281	6.42
MS9312-064	.490 - .510	.565 - .625	1.615 - 1.635	2.344	6.59
MS9312-065	.490 - .510	.628 - .688	1.678 - 1.698	2.406	6.76
MS9312-066	.490 - .510	.690 - .750	1.740 - 1.760	2.469	6.93
MS9312-067	.490 - .510	.752 - .812	1.802 - 1.822	2.531	7.10
MS9312-068	.490 - .510	.815 - .875	1.865 - 1.885	2.594	7.27
MS9312-069	.490 - .510	.878 - .938	1.928 - 1.948	2.656	7.44
MS9312-069	.490 - .510	.878 - .938	1.928 - 1.948	2.656	7.56
MS9312-070	.490 - .510	.940 - 1.000	1.990 - 2.000	2.719	7.73
MS9312-071	.490 - .510	1.002 - 1.062	2.052 - 2.072	2.781	7.90
MS9312-072	.490 - .510	1.065 - 1.125	2.115 - 2.135	2.844	8.07
MS9312-073	.490 - .510	1.128 - 1.188	2.240 - 2.260	2.969	8.41
MS9312-074	.490 - .510	1.190 - 1.250	2.365 - 2.385	3.094	8.75
MS9312-075	.490 - .510	1.440 - 1.500	2.490 - 2.510	3.219	9.09
MS9312-076	.490 - .510	1.565 - 1.625	2.615 - 2.635	3.344	9.43
MS9312-077	.490 - .510	1.690 - 1.750	2.740 - 2.760	3.469	9.77
MS9312-078	.490 - .510	1.815 - 1.875	2.865 - 2.885	3.594	10.11

TABLE 1 - PART NUMBERS AND DIMENSIONS. - CONTINUED

PART NUMBER	A	B	C	L REF	APPROX. MASS LB/100
MS9312-100	.552 - .572	<u>1/</u>	.740 - .760	1.531	4.28
MS9312-101	.552 - .572	<u>1/</u>	.802 - .822	1.594	4.45
MS9312-102	.552 - .572	<u>1/</u>	.865 - .885	1.656	4.62
MS9312-103	.552 - .572	<u>1/</u>	.928 - .948	1.719	4.79
MS9312-104	.552 - .572	<u>1/</u>	.990 - 1.010	1.781	4.96
MS9312-105	.552 - .572	<u>1/</u>	1.052 - 1.072	1.844	5.13
MS9312-106	.552 - .572	.065 - .125	1.115 - 1.135	1.906	5.30
MS9312-107	.552 - .572	.128 - .188	1.178 - 1.198	1.969	5.47
MS9312-108	.552 - .572	.190 - .250	1.240 - 1.260	2.031	5.64
MS9312-109	.552 - .572	.252 - .312	1.302 - 1.322	2.094	5.81
MS9312-110	.552 - .572	.315 - .375	1.365 - 1.385	2.156	5.98
MS9312-111	.552 - .572	.378 - .438	1.428 - 1.448	2.219	6.15
MS9312-112	.552 - .572	.440 - .500	1.490 - 1.510	2.281	6.32
MS9312-113	.552 - .572	.502 - .562	1.552 - 1.572	2.344	6.49
MS9312-114	.552 - .572	.565 - .625	1.615 - 1.635	2.406	6.66
MS9312-115	.552 - .572	.628 - .688	1.678 - 1.698	2.469	6.83
MS9312-116	.552 - .572	.690 - .750	1.740 - 1.760	2.531	7.00
MS9312-117	.552 - .572	.752 - .812	1.802 - 1.822	2.593	7.17
MS9312-118	.552 - .572	.815 - .875	1.865 - 1.885	2.656	7.34
MS9312-119	.552 - .572	.878 - .938	1.928 - 1.948	2.719	7.51
MS9312-120	.552 - .572	.940 - 1.000	1.990 - 2.000	2.781	7.68
MS9312-121	.552 - .572	1.002 - 1.062	2.052 - 2.072	2.844	7.85
MS9312-122	.552 - .572	1.065 - 1.125	2.115 - 2.135	2.906	8.02
MS9312-123	.552 - .572	1.128 - 1.188	2.240 - 2.260	3.031	8.36
MS9312-124	.552 - .572	1.190 - 1.250	2.365 - 2.385	3.156	8.70
MS9312-125	.552 - .572	1.440 - 1.500	2.490 - 2.510	3.281	9.04
MS9312-126	.552 - .572	1.565 - 1.625	2.615 - 2.635	3.406	9.38
MS9312-127	.552 - .572	1.690 - 1.750	2.740 - 2.760	3.531	9.72
MS9312-128	.552 - .572	1.815 - 1.875	2.865 - 2.885	3.656	10.06
MS9312-129	.552 - .572	1.940 - 2.000	2.990 - 3.010	3.781	10.40