

ADOPTION NOTICE

SAE-AS9457, "BOLT, MACHINE, HEXAGON HEAD, STEEL, .5625-18 UNJF-3A", was adopted on 15-OCT-99 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org/>

Custodians:

Navy - AS
Air Force - 99
DLA - IS

Adopting Activity:

DLA - IS

SAENORM.COM : Click to view the full PDF of SAE-AS9457

FSC 5306

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9457A, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9457A, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9457

AS9457

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 1999-08

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

BOLT, MACHINE, HEXAGON HEAD, STEEL,
.5625-18 UNJF-3A

AS9457
SHEET 1 OF 3

AS9457

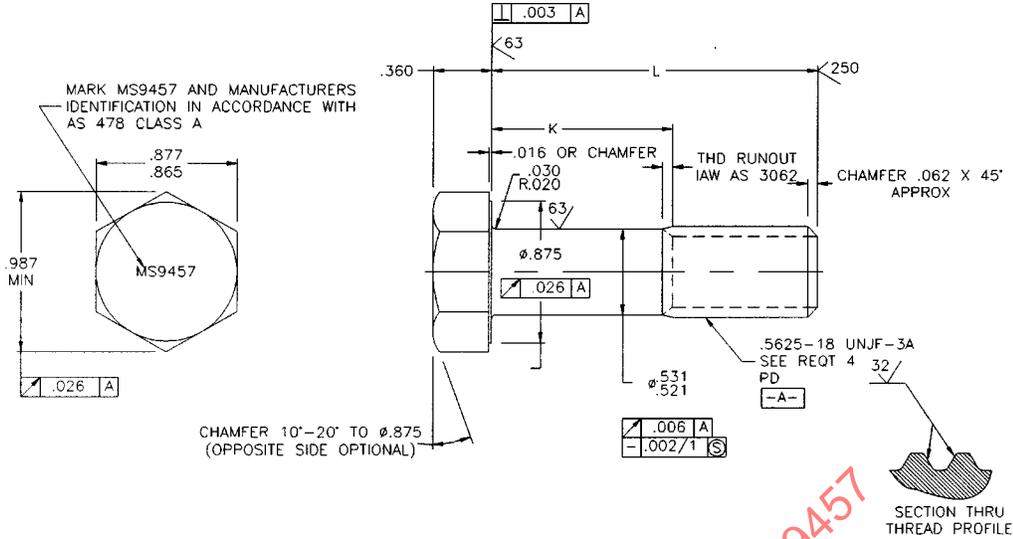


TABLE 1. DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K	APPROX WEIGHT LB/100	DASH NO.	L	K	APPROX WEIGHT LB/100
				-31	3.250	1.815-1.875	25.73
				-32	3.375	1.940-2.000	26.49
				-33	3.500	2.065-2.125	27.26
-04	.875	.114-.134	10.18	-34	3.625	2.190-2.250	28.02
-05	.938	.114-.134	10.56	-35	3.750	2.315-2.375	28.79
				-36	3.875	2.440-2.500	29.56
-06	1.000	.114-.134	11.94	-37	4.000	2.565-2.625	30.32
-07	1.062	.114-.134	12.32	-38	4.125	2.690-2.750	31.09
-08	1.125	.114-.134	12.70	-39	4.250	2.815-2.875	31.86
-09	1.188	.114-.134	13.08	-40	4.375	2.940-3.000	32.62
-10	1.250	.114-.134	13.47				
				-41	4.500	3.065-3.125	33.39
-11	1.312	.114-.134	13.85	-42	4.625	3.190-3.250	34.15
-12	1.375	.114-.134	14.23	-43	4.750	3.315-3.375	34.92
-13	1.438	.114-.134	14.62	-44	4.875	3.440-3.500	35.69
-14	1.500	.114-.134	15.00	-45	5.000	3.565-3.625	36.45
-15	1.562	.129-.188	15.38				
				-46	5.125	3.690-3.750	37.22
-16	1.625	.190-.250	15.77	-47	5.250	3.815-3.875	37.99
-17	1.688	.252-.312	16.15	-48	5.375	3.940-4.000	38.75
-18	1.750	.315-.375	16.53	-49	5.500	4.065-4.125	39.52
-19	1.812	.378-.438	16.91	-50	5.625	4.190-4.250	40.28
-20	1.875	.440-.500	17.30				
				-51	5.750	4.315-4.375	41.05
-21	2.000	.565-.625	18.06	-52	5.875	4.440-4.500	41.82
-22	2.125	.690-.750	18.83	-53	6.000	4.565-4.625	42.58
-23	2.250	.815-.875	19.06				
-24	2.375	.940-1.000	20.36				
-25	2.500	1.065-1.125	21.13				
-26	2.625	1.190-1.250	21.90				
-27	2.750	1.315-1.375	22.66				
-28	2.875	1.440-1.500	23.43				
-29	3.000	1.565-1.625	24.19				
-30	3.125	1.690-1.750	24.96				