

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**SAE AS9460**

FEDERAL SUPPLY CLASS  
5320

**RATIONALE**

AS9460 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

**NOTICE**


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9460A, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9460A, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9460

**SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9460>**

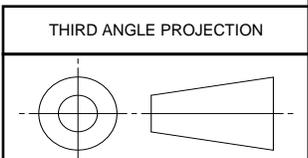

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: NONE



**AEROSPACE STANDARD**  
RIVET, SOLID – 100° FLUSH HEAD, AMS7235

**SAE AS9460**  
SHEET 1 OF 5

ISSUED 1999-08 REAFFIRMED 2012-11

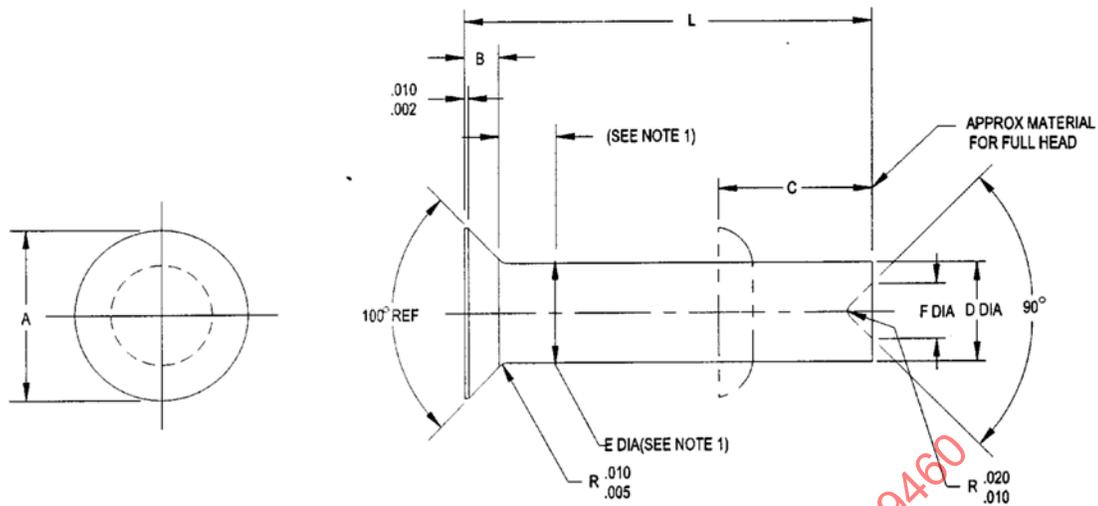


FIGURE 1 - RIVET

TABLE I - DIMENSIONS

NOMINAL SIZE	A	B +.001 -.003	C	D	E	F ±.005	(2) S
.062	.099 - .107	.022	.094	.061 - .063	.061 - .064	NO RECESS	.010
.094	.164 - .172	.036	.141	.093 - .095	.093 - .096	NO RECESS	.010
.125	.210 - .218	.042	.188	.123 - .126	.123 - .128	.070	.010
.156	.272 - .280	.055	.234	.154 - .157	.154 - .159	.080	.015
.188	.337 - .347	.070	.281	.186 - .189	.186 - .191	.100	.015
.250	.460 - .470	.095	.375	.248 - .252	.248 - .254	.125	.020
.312	.548 - .558	.106	.469	.310 - .314	.310 - .316	.150	.020
.375	.678 - .688	.134	.562	.373 - .377	.373 - .379	.180	.020

TABLE II - DIMENSIONS AND PART NUMBERS

NOM SIZE	.062		.094		.125		.156		
	L	PART NO.	APPROX WEIGHT LB/100						
.125	MS9460-002	.01							
.156	MS9460-003	.02							
.188	MS9460-004	.02	MS9460-050	.05					
.219	MS9460-005	.02	MS9460-051	.06					
.250	MS9460-006	.03	MS9460-052	.06	MS9460-098	.12			
.281	MS9460-007	.03	MS9460-053	.07	MS9460-099	.13			
.312	MS9460-008	.03	MS9460-054	.08	MS9460-100	.14	MS9460-146	.22	
.344	MS9460-009	.03	MS9460-055	.08	MS9460-101	.15	MS9460-147	.24	
.375	MS9460-010	.04	MS9460-056	.09	MS9460-102	.17	MS9460-148	.26	
.406	MS9460-011	.04	MS9460-057	.10	MS9460-103	.18	MS9460-149	.28	
.438	MS9460-012	.04	MS9460-058	.10	MS9460-104	.19	MS9460-150	.31	
.469	MS9460-013	.05	MS9460-059	.11	MS9460-105	.20	MS9460-151	.32	
.500	MS9460-014	.05	MS9460-060	.12	MS9460-106	.21	MS9460-152	.34	
.531	MS9460-015	.05	MS9460-061	.12	MS9460-107	.23	MS9460-153	.36	
.562	MS9460-016	.06	MS9460-062	.13	MS9460-108	.24	MS9460-154	.38	
.594	MS9460-017	.06	MS9460-063	.14	MS9460-109	.25	MS9460-155	.40	
.625	MS9460-018	.06	MS9460-064	.14	MS9460-110	.27	MS9460-156	.42	
.656			MS9460-065	.15	MS9460-111	.28	MS9460-157	.44	
.688			MS9460-066	.16	MS9460-112	.29	MS9460-158	.46	
.719			MS9460-067	.16	MS9460-113	.30	MS9460-159	.48	
.750			MS9460-068	.17	MS9460-114	.31	MS9460-160	.50	
.812			MS9460-070	.18	MS9460-116	.34	MS9460-162	.53	
.875			MS9460-072	.20	MS9460-118	.37	MS9460-164	.57	
.938			MS9460-074	.21	MS9460-120	.39	MS9460-166	.62	
1.000			MS9460-076	.22	MS9460-122	.41	MS9460-168	.65	
1.062					MS9460-124	.44	MS9460-170	.69	
1.125					MS9460-126	.46	MS9460-172	.73	
1.188					MS9460-128	.49	MS9460-174	.77	
1.250					MS9460-130	.51	MS9460-176	.80	
1.312					MS9460-132	.54	MS9460-178	.84	
1.375					MS9460-134	.56	MS9460-180	.88	
1.438					MS9460-136	.59	MS9460-182	.92	
1.500					MS9460-138	.61	MS9460-184	.96	

SAENORM.COM : Click to view the full PDF of AS9460

TABLE II - DIMENSIONS AND PART NUMBERS - CONTINUED

NOM SIZE	.188		.250		.312		.375	
L	PART NO.	APPROX WEIGHT LB/100						
.125								
.156								
.188								
.219								
.250								
.281								
.312								
.344								
.375	MS9460-194	.40						
.406	MS9460-195	.43						
.438	MS9460-196	.45						
.469	MS9460-197	.48						
.500	MS9460-198	.51	MS9460-244	.96				
.531	MS9460-199	.54	MS9460-245	1.01				
.562	MS9460-200	.57	MS9460-246	1.06				
.594	MS9460-201	.60	MS9460-247	1.11				
.625	MS9460-202	.62	MS9460-248	1.16	MS9460-294	1.80		
.656	MS9460-203	.65	MS9460-249	1.21	MS9460-295	1.88		
.688	MS9460-204	.68	MS9460-250	1.26	MS9460-296	1.96		
.719	MS9460-205	.71	MS9460-251	1.31	MS9460-297	2.04		
.750	MS9460-206	.74	MS9460-252	1.36	MS9460-298	2.12	MS9460-344	3.18
.812	MS9460-208	.79	MS9460-254	1.46	MS9460-300	2.27	MS9460-346	3.40
.875	MS9460-210	.85	MS9460-256	1.56	MS9460-302	2.43	MS9460-348	3.62
.938	MS9460-212	.90	MS9460-258	1.66	MS9460-304	2.59	MS9460-350	3.85
1.000	MS9460-214	.96	MS9460-260	1.76	MS9460-306	2.74	MS9460-352	4.08
1.062	MS9460-216	1.02	MS9460-262	1.86	MS9460-308	2.90	MS9460-354	4.30
1.125	MS9460-218	1.07	MS9460-264	1.96	MS9460-310	3.05	MS9460-356	4.53
1.188	MS9460-220	1.13	MS9460-266	2.06	MS9460-312	3.22	MS9460-358	4.75
1.250	MS9460-222	1.19	MS9460-268	2.16	MS9460-314	3.37	MS9460-360	4.98
1.312	MS9460-224	1.24	MS9460-270	2.26	MS9460-316	3.52	MS9460-362	5.20
1.375	MS9460-226	1.30	MS9460-272	2.36	MS9460-318	3.68	MS9460-364	5.44
1.438	MS9460-228	1.35	MS9460-274	2.43	MS9460-320	3.84	MS9460-366	5.66
1.500	MS9460-230	1.41	MS9460-276	2.57	MS9460-322	3.99	MS9460-368	5.87

SAENORM.COM - Click to view the PDF of as9460