

REV. A

SAE AS9493

RATIONALE

FEDERAL SUPPLY CLASS 5306

AS9493A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9493A, AMENDMENT 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


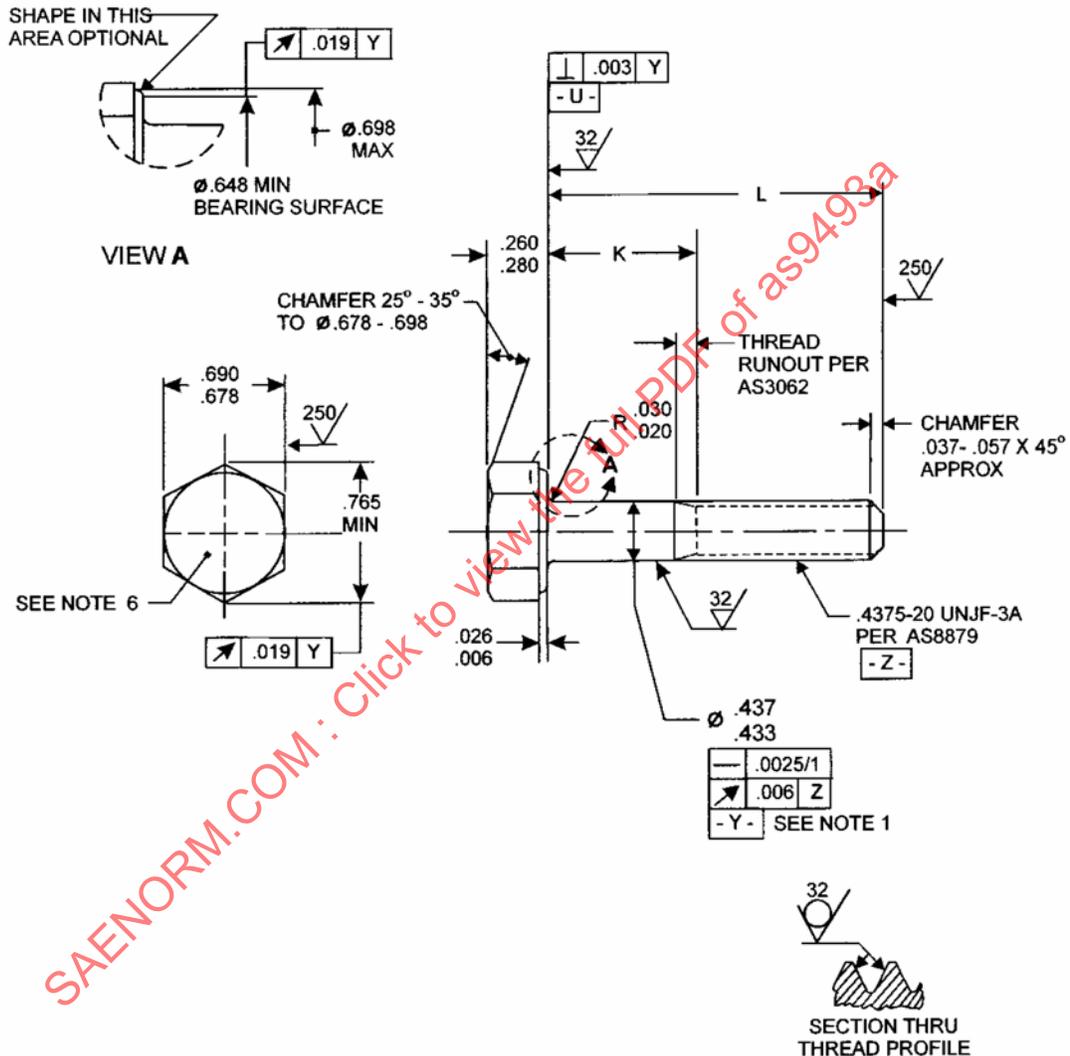


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9493A>

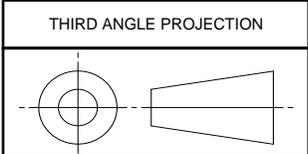

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace An SAE International Group

AEROSPACE STANDARD

BOLT, MACHINE - HEXAGON HEAD, FULL SHANK, CORROSION AND HEAT RESISTANT STEEL, UNS S66286, 130 KSI MIN, .4375-20 UNJF-3A

SAE AS9493 SHEET 1 OF 3

REV. A

Copyright 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA) Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1999-04 REVISED 2004-06 REAFFIRMED 2012-11

TABLE 1 - PART NUMBERS AND DIMENSIONS.

PART NUMBER	L	K	APPROX. MASS LB/100	PART NUMBER	L	K	APPROX. MASS LB/100
MS9493-04	.678 - .698	.105 - .125	5.74	MS9493-31	2.990 - 3.010	1.815 - 1.875	15.57
MS9493-05	.740 - .760	.105 - .125	6.00	MS9493-32	3.115 - 3.135	1.940 - 2.000	16.10
MS9493-06	.802 - .822	.105 - .125	6.27	MS9493-33	3.240 - 3.260	2.065 - 2.125	16.63
MS9493-07	.865 - .885	.105 - .125	6.54	MS9493-34	3.365 - 3.385	2.190 - 2.250	17.16
MS9493-08	.928 - .948	.105 - .125	6.80	MS9493-35	3.490 - 3.510	2.315 - 2.375	17.69
MS9493-09	.990 - 1.010	.105 - .125	7.07	MS9493-36	3.615 - 3.635	2.440 - 2.500	18.22
MS9493-10	1.052 - 1.072	.105 - .125	7.33	MS9493-37	3.740 - 3.760	2.565 - 2.625	18.75
MS9493-11	1.115 - 1.135	.105 - .125	7.60	MS9493-38	3.865 - 3.885	2.690 - 2.750	19.29
MS9493-12	1.178 - 1.198	.105 - .125	7.97	MS9493-39	3.990 - 4.010	2.815 - 2.875	19.82
MS9493-13	1.240 - 1.260	.105 - .125	8.13	MS9493-40	4.115 - 4.135	2.940 - 3.000	20.35
MS9493-14	1.302 - 1.322	.128 - .188	8.39	MS9493-41	4.240 - 4.260	3.065 - 3.125	20.88
MS9493-15	1.365 - 1.385	.190 - .250	8.66	MS9493-42	4.365 - 4.385	3.190 - 3.250	21.41
MS9493-16	1.428 - 1.448	.252 - .312	8.93	MS9493-43	4.490 - 4.510	3.315 - 3.375	21.94
MS9493-17	1.490 - 1.510	.315 - .375	9.19	MS9493-44	4.615 - 4.635	3.440 - 3.500	22.47
MS9493-18	1.552 - 1.572	.378 - .438	9.45	MS9493-45	4.740 - 4.760	3.565 - 3.625	23.00
MS9493-19	1.615 - 1.635	.440 - .500	9.72	MS9493-46	4.865 - 4.885	3.690 - 3.750	23.64
MS9493-20	1.678 - 1.698	.502 - .562	9.99	MS9493-47	4.990 - 5.010	3.815 - 3.875	24.07
MS9493-21	1.740 - 1.760	.565 - .625	10.25	MS9493-48	5.115 - 5.135	3.940 - 4.000	24.60
MS9493-22	1.865 - 1.885	.690 - .750	10.79	MS9493-49	5.240 - 5.260	4.065 - 4.125	25.13
MS9493-23	1.990 - 2.010	.815 - .875	11.32	MS9493-50	5.365 - 5.385	4.190 - 4.250	25.66
MS9493-24	2.115 - 2.135	.940 - 1.000	11.85	MS9493-51	5.490 - 5.510	4.315 - 4.375	26.19
MS9493-25	2.240 - 2.260	1.065 - 1.125	12.38	MS9493-52	5.615 - 5.635	4.440 - 4.500	26.72
MS9493-26	2.365 - 2.385	1.190 - 1.250	12.91	MS9493-53	5.740 - 5.760	4.565 - 4.625	27.25
MS9493-27	2.490 - 2.510	1.315 - 1.375	13.44	MS9493-54	5.865 - 5.885	4.690 - 4.750	27.79
MS9493-28	2.615 - 2.635	1.440 - 1.500	13.97	MS9493-55	5.990 - 6.010	4.815 - 4.875	28.32
MS9493-29	2.740 - 2.760	1.565 - 1.625	14.50	MS9493-56	1.802 - 1.822	.628 - .688	10.52
MS9493-30	2.865 - 2.885	1.690 - 1.750	15.04	MS9493-57	1.928 - 1.948	.752 - .812	11.06

SAENORM.COM : Click to view this PDF for free

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS9493</b> SHEET 2 OF 3	<b>REV.</b> <b>A</b>
	BOLT, MACHINE - HEXAGON HEAD, FULL SHANK, CORROSION AND HEAT RESISTANT STEEL, UNS S66286, 130 KSI MIN, .4375-20 UNJF-3A		