

REV.
B

AS9522

RATIONALE

CADMIUM WARNING NOTE UPDATED AND THREAD SPECIFICATION REVISED TO AS8879.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9522C, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

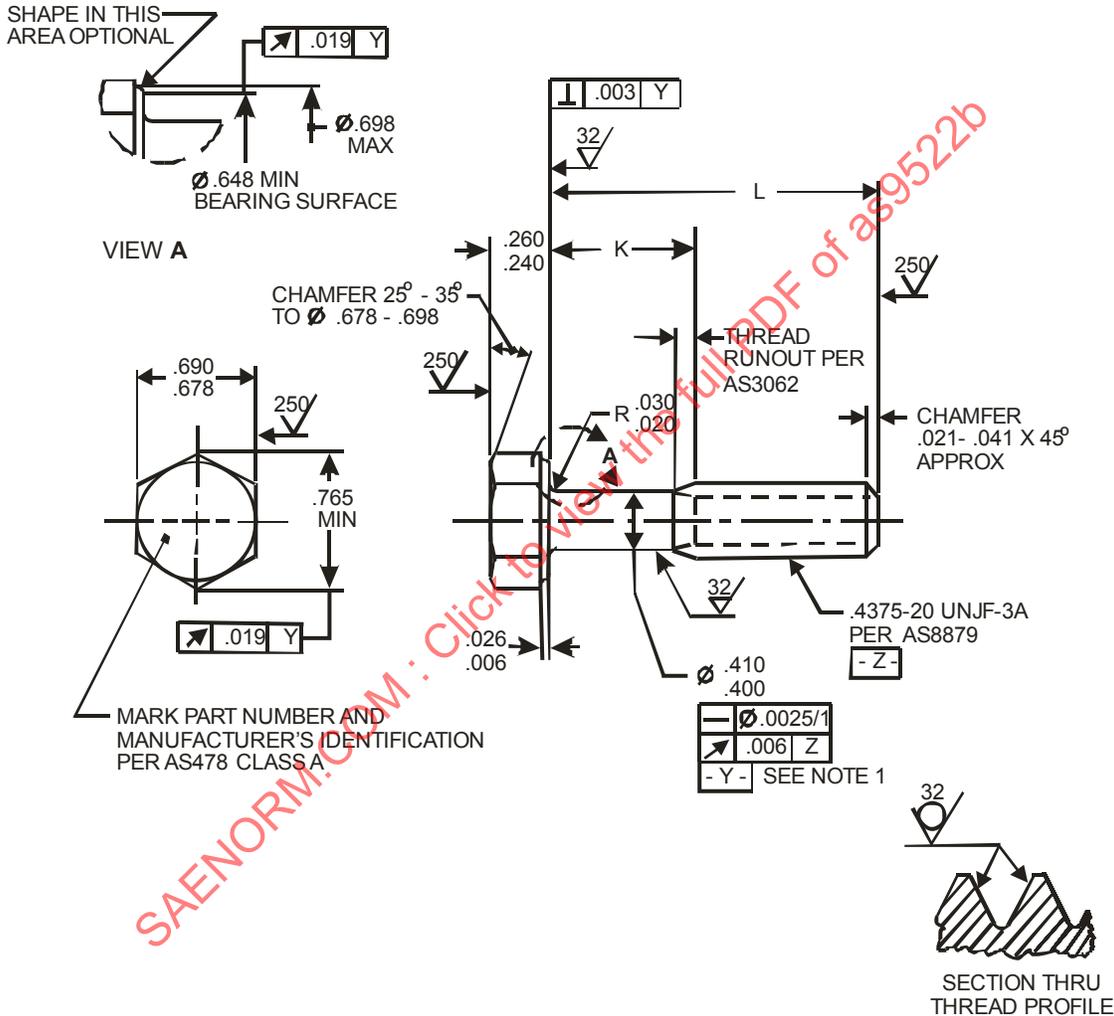


FIGURE 1 - BOLT

CUSTODIAN: SAE E-25

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

BOLT, MACHINE - HEXAGON HEAD, STEEL,
CADMIUM PLATED, UNS G87400, 125 KSI MIN,
.4375-20 UNJF-3A

AS9522
SHEET 1 OF 3

REV. B

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1999-04 REVISED 2007-07

REV.
B

AS9522

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9522-04	.678- .698	.105- .125	5.78	MS9522-31	2.990-3.010	1.815-1.875	14.20
MS9522-05	.740- .760	.105- .125	6.01	MS9522-32	3.115-3.135	1.940-2.000	14.65
MS9522-06	.802- .822	.105- .125	6.24	MS9522-33	3.240-3.260	2.065-2.125	15.11
MS9522-07	.865- .885	.105- .125	6.47	MS9522-34	3.365-3.385	2.190-2.250	15.56
MS9522-08	.928- .948	.105- .125	6.69	MS9522-35	3.490-3.510	2.315-2.375	16.02
MS9522-09	.990-1.010	.105- .125	6.92	MS9522-36	3.615-3.635	2.440-2.500	16.47
MS9522-10	1.052-1.072	.105- .125	7.15	MS9522-37	3.740-3.760	2.565-2.625	16.93
MS9522-11	1.115-1.135	.105- .125	7.37	MS9522-38	3.865-3.885	2.690-2.750	17.38
MS9522-12	1.178-1.198	.105- .125	7.60	MS9522-39	3.990-4.010	2.815-2.875	17.84
MS9522-13	1.240-1.260	.105- .125	7.83	MS9522-40	4.115-4.135	2.940-3.000	18.29
MS9522-14	1.302-1.322	.128- .188	8.06	MS9522-41	4.240-4.260	3.065-3.125	18.74
MS9522-15	1.365-1.385	.190- .250	8.28	MS9522-42	4.365-4.385	3.190-3.250	19.20
MS9522-16	1.428-1.448	.252- .312	8.51	MS9522-43	4.490-4.510	3.315-3.375	19.65
MS9522-17	1.490-1.510	.315- .375	8.74	MS9522-44	4.615-4.635	3.440-3.500	20.11
MS9522-18	1.552-1.572	.378- .438	8.97	MS9522-45	4.740-4.760	3.565-3.625	20.56
MS9522-19	1.615-1.635	.440- .500	9.19	MS9522-46	4.865-4.885	3.690-3.750	21.02
MS9522-20	1.678-1.698	.502- .562	9.42	MS9522-47	4.990-5.010	3.815-3.875	21.47
MS9522-21	1.740-1.760	.565- .625	9.65	MS9522-48	5.115-5.135	3.940-4.000	21.93
MS9522-22	1.865-1.885	.690- .750	10.10	MS9522-49	5.240-5.260	4.065-4.125	22.38
MS9522-23	1.990-2.010	.815- .875	10.56	MS9522-50	5.365-5.385	4.190-4.250	22.84
MS9522-24	2.115-2.135	.940-1.000	11.01	MS9522-51	5.490-5.510	4.315-4.375	23.29
MS9522-25	2.240-2.260	1.065-1.125	11.47	MS9522-52	5.615-5.635	4.440-4.500	23.75
MS9522-26	2.365-2.385	1.190-1.250	11.92	MS9522-53	5.740-5.760	4.565-4.625	24.20
MS9522-27	2.490-2.510	1.315-1.375	12.38	MS9522-54	5.865-5.885	4.690-4.750	24.66
MS9522-28	2.615-2.635	1.440-1.500	12.83	MS9522-55	5.990-6.010	4.815-4.875	25.11
MS9522-29	2.740-2.760	1.565-1.625	13.29				
MS9522-30	2.865-2.885	1.690-1.750	13.74				

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

- FOR PART NUMBERS MS9522-04 THRU MS9522-24 THE THREAD PD (DATUM $\square-Z$) SHALL REPLACE DATUM $\square-Y$.
- MATERIAL: LOW ALLOY STEEL AMS 6322 (UNS G87400).
- PROCUREMENT SPECIFICATION: AS7452.
- HEAD TO SHANK FILLET RADIUS: FOR PART NUMBERS MS9522-16 AND LARGER, THE HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
- FINISH: CADMIUM PLATE PER AMS 2400. DIMENSIONS ARE AFTER PLATING.
- MAGNETIC PARTICLE INSPECTION PER ASTM E 1444 BEFORE PLATING.

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

BOLT, MACHINE - HEXAGON HEAD, STEEL,
CADMIUM PLATED, UNS G87400, 125 KSI MIN,
.4375-20 UNJF-3A

AS9522
SHEET 2 OF 3

REV.
B