

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9524C AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9524C. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

AS9524

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."  
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as9524

THIRD ANGLE PROJECTION



ISSUED 1999-04

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: AMS 7452



**AEROSPACE STANDARD**

BOLT, MACHINE, HEXAGON HEAD,  
STEEL, CADMIUM PLATED,  
.5625-18 UNJF-3A

**AS9524**  
SHEET 1 OF 3

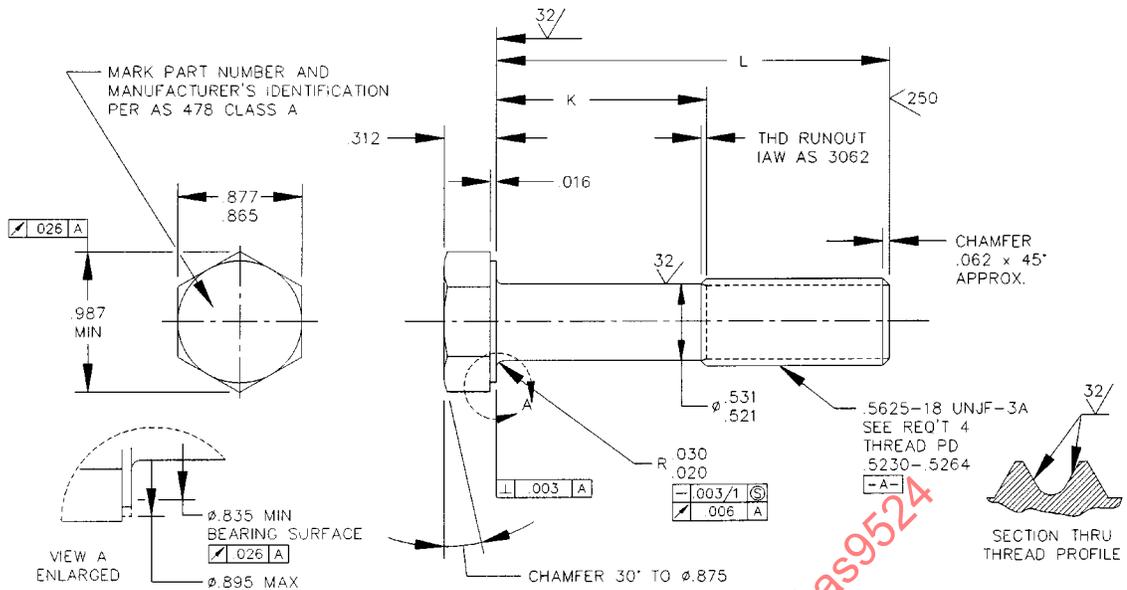


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX. WEIGHT LB/100	DASH NUMBER	L	K	APPROX. WEIGHT LB/100
-04	.875	.113-.133	11.18	-31	3.250	1.815-1.875	25.73
-05	.938	.113-.133	11.56	-32	3.375	1.940-2.000	26.49
-06	1.000	.113-.133	11.94	-33	3.500	2.065-2.125	27.26
-07	1.062	.113-.133	12.32	-34	3.625	2.190-2.250	28.02
-08	1.125	.113-.133	12.70	-35	3.750	2.315-2.375	28.79
-09	1.188	.113-.133	13.08	-36	3.875	2.440-2.500	29.56
-10	1.250	.113-.133	13.47	-37	4.000	2.565-2.625	30.32
-11	1.312	.113-.133	13.85	-38	4.125	2.690-2.750	31.09
-12	1.375	.113-.133	14.23	-39	4.250	2.815-2.875	31.86
-13	1.438	.113-.133	14.62	-40	4.375	2.940-3.000	32.62
-14	1.500	.113-.133	15.00	-41	4.500	3.065-3.125	33.39
-15	1.562	.128-.188	15.38	-42	4.625	3.190-3.250	34.15
-16	1.625	.190-.250	15.77	-43	4.750	3.315-3.375	34.92
-17	1.688	.253-.313	16.15	-44	4.875	3.440-3.500	35.69
-18	1.750	.315-.375	16.53	-45	5.000	3.565-3.625	36.45
-19	1.812	.377-.437	16.91	-46	5.125	3.690-3.750	37.22
-20	1.875	.440-.500	17.30	-47	5.250	3.815-3.875	37.99
-21	2.000	.565-.625	18.06	-48	5.375	3.940-4.000	38.75
-22	2.125	.690-.750	18.83	-49	5.500	4.065-4.125	39.52
-23	2.250	.815-.875	19.60	-50	5.625	4.190-4.250	40.28
-24	2.375	.940-1.000	20.36	-51	5.750	4.315-4.375	41.05
-25	2.500	1.065-1.125	21.13	-52	5.875	4.440-4.500	41.82
-26	2.625	1.190-1.250	21.90	-53	6.000	4.565-4.625	42.58
-27	2.750	1.315-1.375	22.66				
-28	2.875	1.440-1.500	23.43				
-29	3.000	1.565-1.625	24.19				
-30	3.215	1.690-1.750	24.96				