

**ADOPTION NOTICE**

SAE-AS9526, "BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .750-16 UNJF-3A", was adopted on 15-OCT-99 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org/>

**Custodians:**

Army - AV  
Navy - AS  
Air Force - 99  
DLA - IS

**Adopting Activity:**

DLA - IS

SAENORM.COM : Click to view the full PDF of SAE-AS9526

**FSC 5306**

**DISTRIBUTION STATEMENT A:** Approved for public release; distribution is unlimited.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9526A, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9526A, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9526

AS9526

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 1999-08

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: AMS 7452



**AEROSPACE STANDARD**

BOLT, MACHINE, HEXAGON HEAD, STEEL,  
CADMIUM PLATED, .750-16 UNJF-3A

**AS9526**  
SHEET 1 OF 3

AS9526

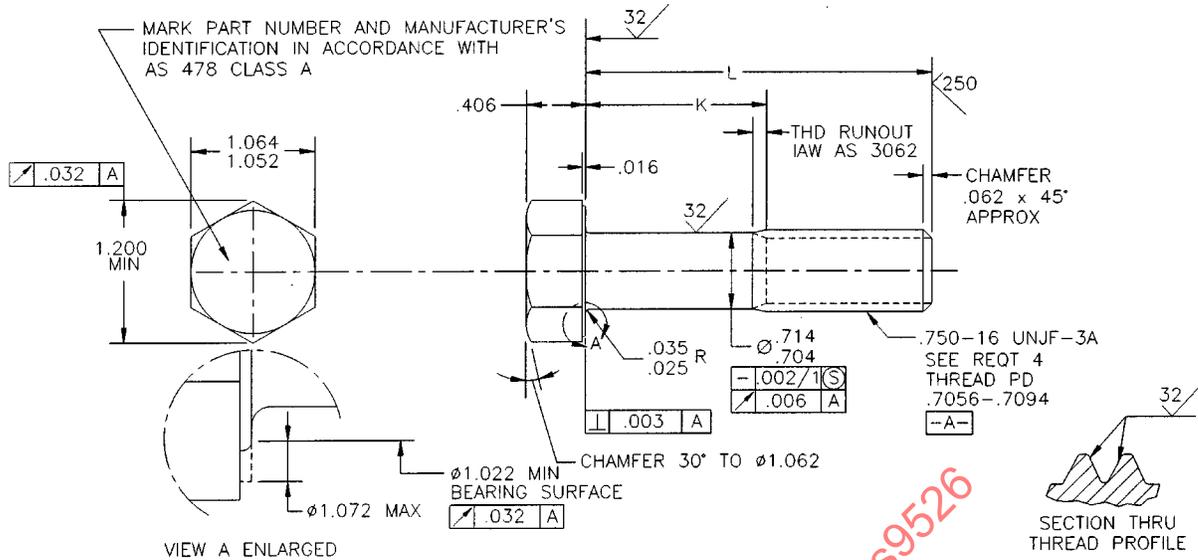


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100	DASH NUMBER	L	K	APPROX WEIGHT LB/100
-06	1.250	.129-.149	25.04	-31	3.625	1.815-1.875	51.47
-07	1.312	.129-.149	25.74	-32	3.750	1.940-2.000	52.86
-08	1.375	.129-.149	26.43	-33	3.875	2.065-2.125	54.25
-09	1.438	.129-.149	27.13	-34	4.000	2.190-2.250	55.64
-10	1.500	.129-.149	27.82	-35	4.125	2.315-2.375	57.03
-11	1.562	.129-.149	28.52	-36	4.250	2.440-2.500	58.42
-12	1.625	.129-.149	29.22	-37	4.375	2.565-2.625	59.81
-13	1.688	.129-.149	29.91	-38	4.500	2.690-2.750	61.20
-14	1.750	.129-.149	30.61	-39	4.625	2.815-2.875	62.59
-15	1.812	.129-.149	31.30	-40	4.750	2.940-3.000	63.98
-16	1.875	.129-.149	32.00	-41	4.875	3.065-3.125	65.37
-17	1.938	.129-.188	32.69	-42	5.000	3.190-3.250	66.76
-18	2.000	.190-.250	33.39	-43	5.125	3.315-3.375	68.15
-19	2.125	.315-.375	34.78	-44	5.250	3.440-3.500	69.54
-20	2.250	.440-.500	36.17	-45	5.375	3.565-3.625	70.93
-21	2.375	.565-.625	37.56	-46	5.500	3.690-3.750	72.33
-22	2.500	.690-.750	38.95	-47	5.625	3.815-3.875	73.72
-23	2.625	.815-.875	40.34	-48	5.750	3.940-4.000	75.11
-24	2.750	.940-1.000	41.73	-49	5.875	4.065-4.125	76.50
-25	2.875	1.065-1.125	43.12	-50	6.000	4.190-4.250	77.89
-26	3.000	1.190-1.250	44.51				
-27	3.125	1.315-1.375	45.90				
-28	3.250	1.440-1.500	47.29				
-29	3.375	1.565-1.625	48.68				
-30	3.500	1.690-1.750	50.08				