

REV.  
A

AS9557

FEDERAL SUPPLY CLASS  
5306

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9557E, AMENDMENT 2. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


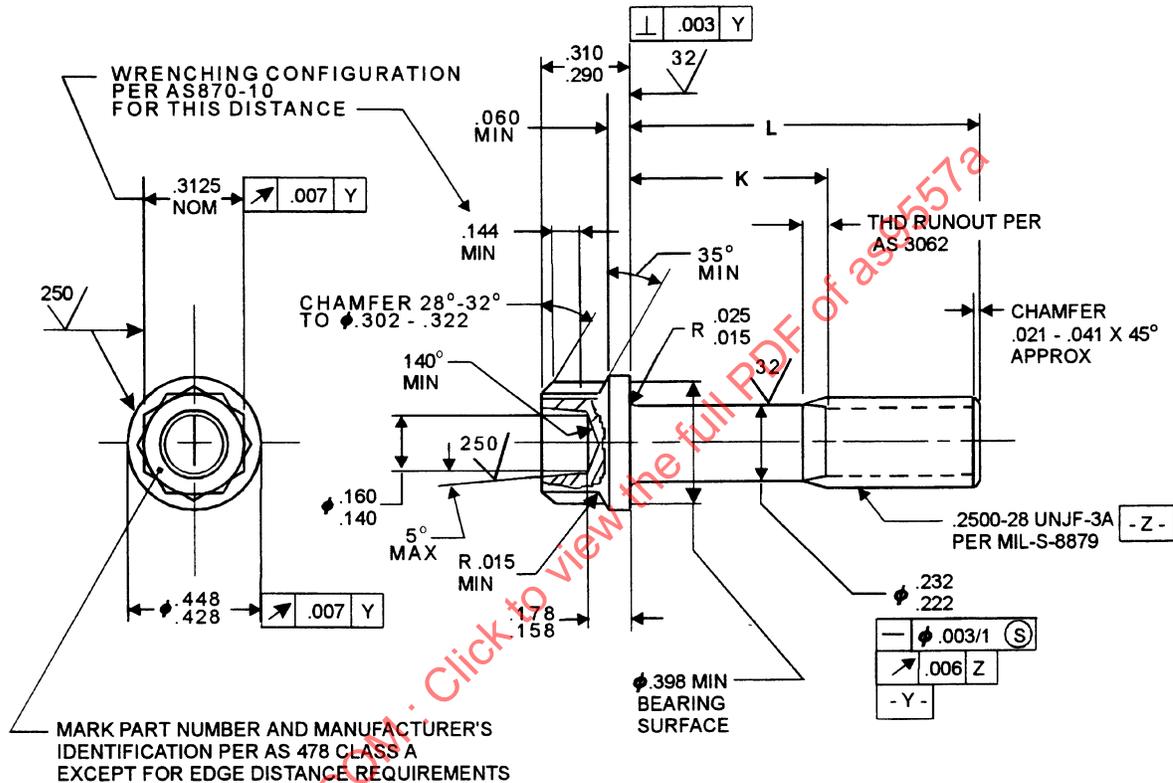


FIGURE 1 - BOLT



THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

**SAE** The Engineering Society  
For Advancing Mobility  
Land Sea Air and Space  
**INTERNATIONAL**  
400 Commonwealth Drive, Warrendale, PA 15096-0001

**AEROSPACE STANDARD**

(R) BOLT, MACHINE - DOUBLE HEXAGON EXTENDED  
WASHER HEAD, CORROSION AND HEAT RESISTANT  
STEEL, UNS S66286, 130 KSI MIN, .2500-28 UNJF-3A

**AS9557**  
SHEET 1 OF 3

**REV.  
A**

ISSUED 2000-08 REVISED 2002-03

REV.  
A

AS9557

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9557-04	.365 - .385	.079 - .099	1.14	MS9557-34	2.740 - 2.760	1.940 - 2.000	3.85
MS9557-05	.428 - .448	.079 - .099	1.21	MS9557-35	2.865 - 2.885	2.065 - 2.125	4.00
MS9557-06	.490 - .510	.079 - .099	1.29	MS9557-36	2.990 - 3.010	2.190 - 2.250	4.14
MS9557-07	.552 - .572	.079 - .099	1.37	MS9557-37	3.115 - 3.135	2.315 - 2.375	4.29
MS9557-08	.615 - .635	.079 - .099	1.44	MS9557-38	3.240 - 3.260	2.440 - 2.500	4.43
MS9557-09	.678 - .698	.079 - .099	1.51	MS9557-39	3.365 - 3.385	2.565 - 2.625	4.58
MS9557-10	.740 - .760	.079 - .099	1.58	MS9557-40	3.490 - 3.510	2.690 - 2.750	4.72
MS9557-11	.802 - .822	.079 - .099	1.65	MS9557-41	3.615 - 3.635	2.815 - 2.875	4.85
MS9557-12	.865 - .885	.079 - .125	1.72	MS9557-42	3.740 - 3.760	2.940 - 3.000	4.99
MS9557-13	.928 - .948	.128 - .188	1.79	MS9557-43	3.865 - 3.885	3.065 - 3.125	5.13
MS9557-14	.990 - 1.010	.190 - .250	1.86	MS9557-44	3.990 - 4.010	3.190 - 3.250	5.27
MS9557-15	1.052 - 1.072	.252 - .312	1.93	MS9557-45	4.115 - 4.135	3.315 - 3.375	5.42
MS9557-16	1.115 - 1.135	.315 - .375	2.00	MS9557-46	4.240 - 4.260	3.440 - 3.500	5.60
MS9557-17	1.178 - 1.198	.378 - .438	2.08	MS9557-47	4.365 - 4.385	3.565 - 3.625	5.71
MS9557-18	1.240 - 1.260	.440 - .500	2.15	MS9557-48	4.490 - 4.510	3.690 - 3.750	5.85
MS9557-19	1.302 - 1.322	.502 - .562	2.22	MS9557-49	4.615 - 4.635	3.815 - 3.875	6.00
MS9557-20	1.365 - 1.385	.565 - .625	2.29	MS9557-50	4.740 - 4.760	3.940 - 4.000	6.14
MS9557-21	1.428 - 1.448	.628 - .688	2.36	MS9557-51	4.865 - 4.885	4.065 - 4.125	6.29
MS9557-22	1.490 - 1.510	.690 - .750	2.43	MS9557-52	4.990 - 5.010	4.190 - 4.250	6.43
MS9557-23	1.552 - 1.572	.752 - .812	2.50	MS9557-53	5.115 - 5.135	4.315 - 4.375	6.58
MS9557-24	1.615 - 1.635	.815 - .875	2.57	MS9557-54	5.240 - 5.260	4.440 - 4.500	6.70
MS9557-25	1.678 - 1.698	.878 - .938	2.64	MS9557-55	5.365 - 5.385	4.565 - 4.625	6.84
MS9557-26	1.740 - 1.760	.940 - 1.000	2.72	MS9557-56	5.490 - 5.510	4.690 - 4.750	6.99
MS9557-27	1.865 - 1.885	1.065 - 1.125	2.86	MS9557-57	5.615 - 5.635	4.815 - 4.875	7.13
MS9557-28	1.990 - 2.010	1.190 - 1.250	3.00	MS9557-58	5.740 - 5.760	4.940 - 5.000	7.28
MS9557-29	2.115 - 2.135	1.315 - 1.375	3.14	MS9557-59	5.865 - 5.885	5.065 - 5.125	7.42
MS9557-30	2.240 - 2.260	1.440 - 1.500	3.29	MS9557-60	5.990 - 6.010	5.190 - 5.250	7.57
MS9557-31	2.365 - 2.385	1.565 - 1.625	3.43	MS9557-61	1.802 - 1.822	1.002 - 1.062	2.79
MS9557-32	2.490 - 2.510	1.690 - 1.750	3.57	MS9557-62	1.928 - 1.948	1.128 - 1.188	2.93
MS9557-33	2.615 - 2.635	1.815 - 1.875	3.71				

**AEROSPACE STANDARD**

(R) BOLT, MACHINE - DOUBLE HEXAGON EXTENDED  
WASHER HEAD, CORROSION AND HEAT RESISTANT  
STEEL, UNS S66286, 130 KSI MIN, .2500-28 UNJF-3A

**AS9557**  
SHEET 2 OF 3

**REV.**  
**A**