

REV. B

AS9572™

FEDERAL SUPPLY CLASS
5305

RATIONALE

UPDATE THREAD SPECIFICATION TO AS8879, ADD OPTIONAL SHAPE FOR BOTTOM OF LIGHTENING HOLE, ADD TERTIARY DATUM FOR POSITION OF SAFETY WIRE HOLE, RELOCATE RUNOUT REQUIREMENT ON BOLT HEAD TO ACROSS POINTS, DELETE RADIUS REQUIREMENT AT TRANSITION FROM WRENCH PAD TO BASE FLANGE, ADD MINIMUM SENSITIVITY LEVEL TO DRAWING NOTE 5, ADD DATUM NOTE 1 FOR SHORT BOLT LENGTHS, RELOCATE DATUM W AND GENERAL EDITORIAL UPDATE.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9572D. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

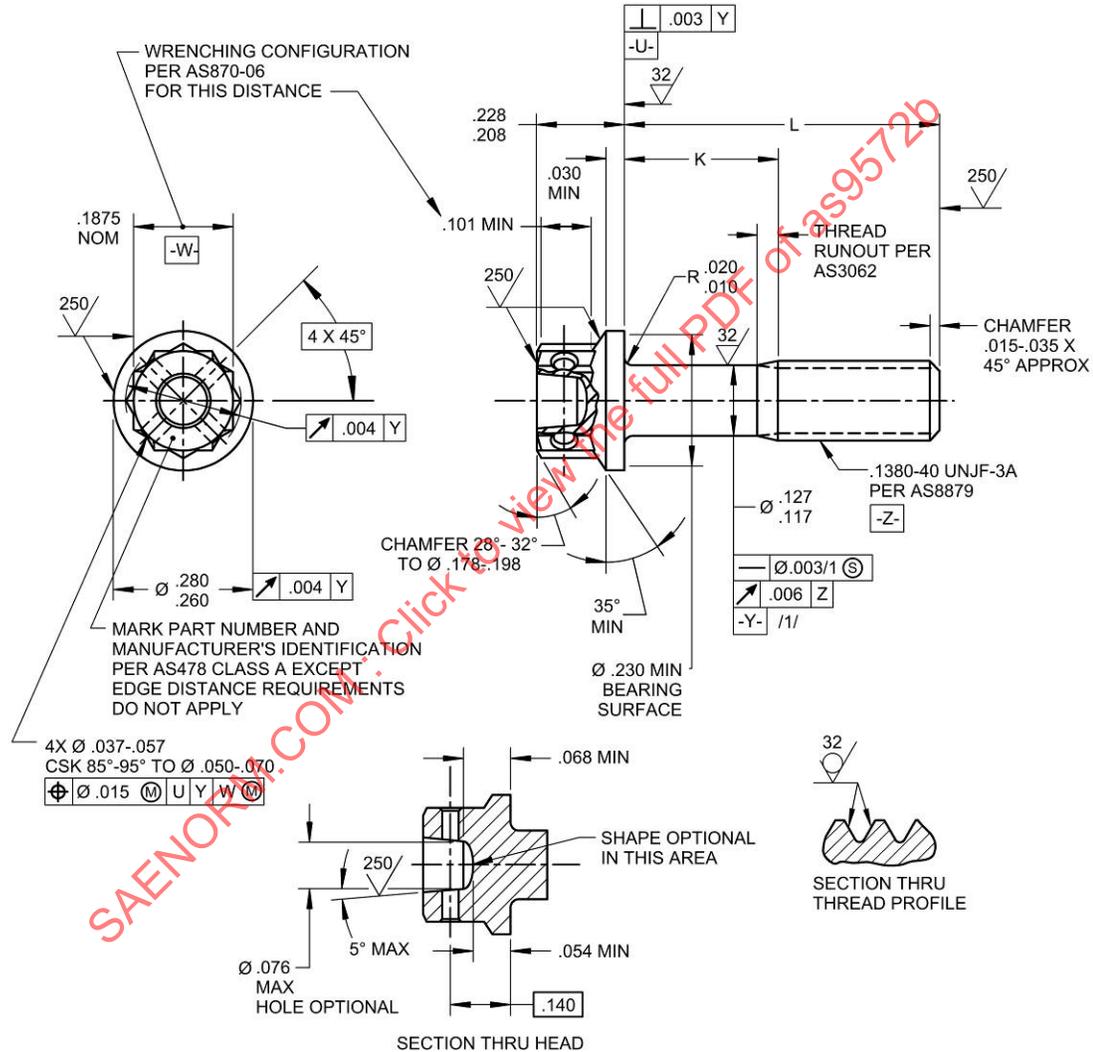


FIGURE 1 - SCREW

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9572B>

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7477



AEROSPACE STANDARD

SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, SILVER PLATED, CORROSION AND HEAT RESISTANT STEEL, UNS S66286, 130 KSI MIN, .1380-40 UNJF-3A

AS9572™
SHEET 1 OF 2

REV. B