




# AEROSPACE STANDARD

## AS 961A

Society of Automotive Engineers, Inc.  
TWO PENNSYLVANIA PLAZA, NEW YORK, N. Y. 10001

Issued 10-31-67  
Revised 10-1-69

### DRIVE - STUDED, ACCESSORY, 5.000 BC SQUARE, DESIGN STANDARD FOR

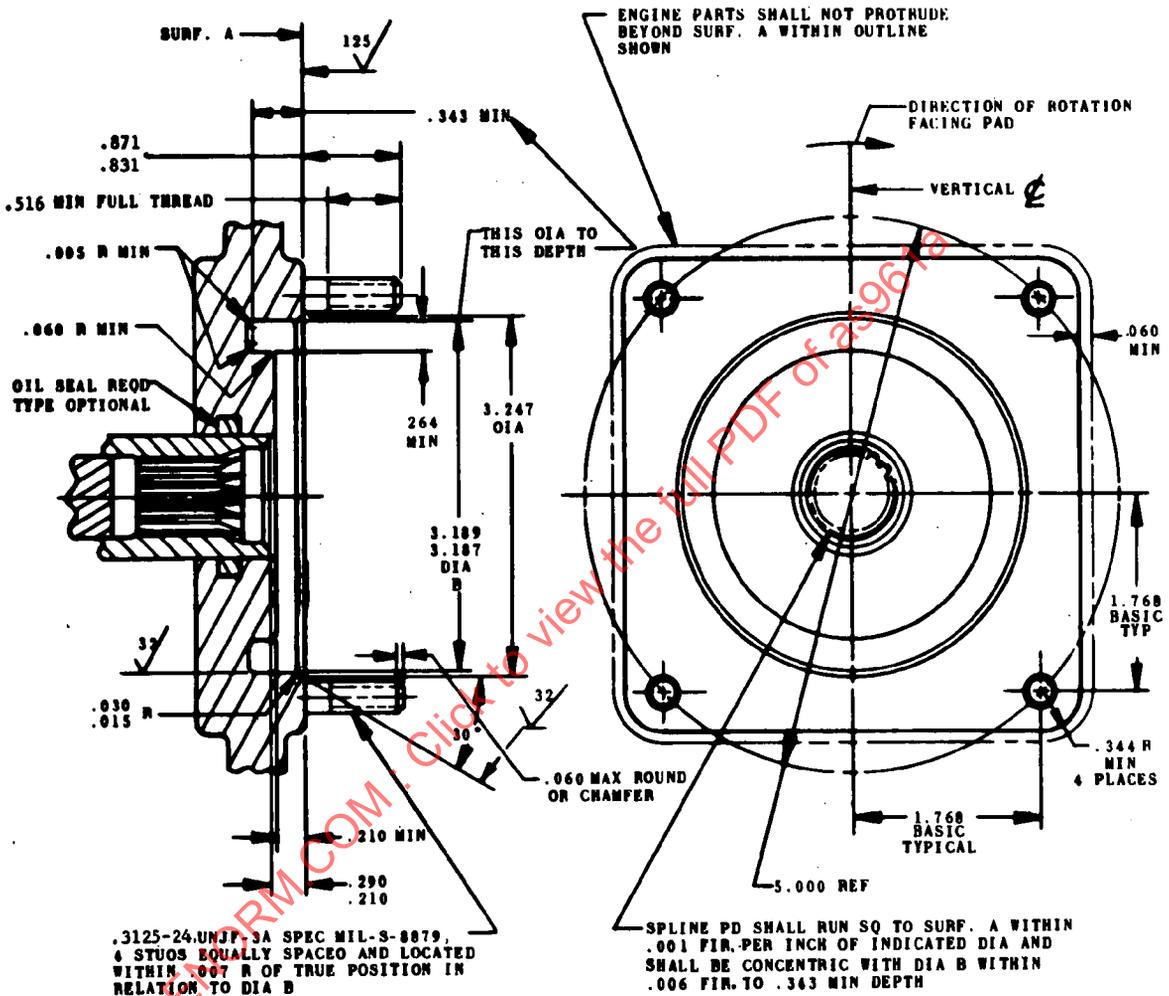

(A)

OASH NO.	RATE POWER HP	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY		
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX	MAX STARTER OUTPUT TORQUE LB IN.
-1V	6	12000	0.600	20	60	750
-2V	12	12000	0.600	35	150	1500

(A)

DASH NO.	RATED TORQUE LB IN.	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-1CT	300	4000	0.600	25	100
-2CT	600	4000	0.800	25	100
-3CT	300	6000	0.600	25	100
-4CT	600	6000	0.800	25	100
-5CT	300	8000	0.600	25	100
-6CT	600	8000	0.800	25	100
-7CT	300	12000	0.600	25	100
-8CT	300	16000	0.600	25	100

SAE Technical Board rules provide that: "All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which apply to the subject matter. Prospective users of the report are responsible for protecting themselves against infringement of patents."