

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9845, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9845, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as9845

THIRD ANGLE PROJECTION



ISSUED 1998-10 REAFFIRMED 2003-10

AS9845

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

PREPARED BY COMMITTEE E-25

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

PIN, STRAIGHT, HEADED,
.2499 DIAMETER,
AMS 5616

AS9845
SHEET 1 OF 3

AS9845

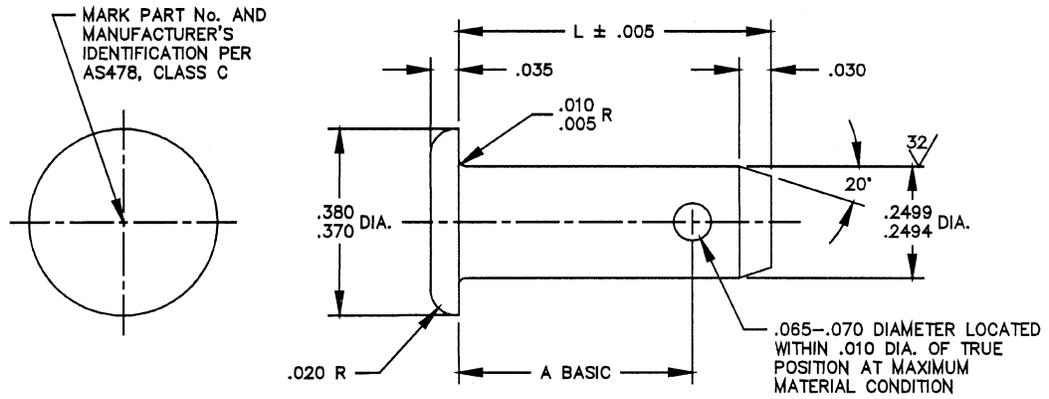


FIGURE 1

TABLE 1

PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100
				MS9845-21	1.315	1.390	2.020	MS9845-36	2.253	2.328	3.340
				MS9845-22	1.378	1.453	2.110	MS9845-37	2.315	2.390	3.430
				MS9845-23	1.440	1.515	2.200	MS9845-38	2.378	2.453	3.510
				MS9845-24	1.503	1.578	2.290	MS9845-39	2.440	2.515	3.600
				MS9845-25	1.565	1.640	2.380	MS9845-40	2.503	2.578	3.690
MS9845-06	.378	.453	.710	MS9845-26	1.628	1.703	2.460	MS9845-41	2.565	2.650	3.790
MS9845-07	.440	.515	.800	MS9845-27	1.690	1.765	2.550	MS9845-42	2.628	2.703	3.860
MS9845-08	.503	.573	.890	MS9845-28	1.753	1.828	2.640	MS9845-43	2.690	2.765	3.950
MS9845-09	.565	.640	.980	MS9845-29	1.815	1.890	2.720	MS9845-44	2.753	2.828	4.040
MS9845-10	.628	.703	1.060	MS9845-30	1.878	1.953	2.810	MS9845-45	2.815	2.890	4.130
MS9845-11	.690	.765	1.150	MS9845-31	1.940	2.015	2.900	MS9845-46	2.878	2.953	4.220
MS9845-12	.753	.828	1.240	MS9845-32	2.003	2.078	2.990				
MS9845-13	.815	.890	1.320	MS9845-33	2.065	2.140	3.080				
MS9845-14	.878	.953	1.410	MS9845-34	2.128	2.203	3.160				
MS9845-15	.940	1.015	1.500	MS9845-35	2.190	2.265	3.250				
MS9845-16	1.003	1.078	1.590								
MS9845-17	1.065	1.140	1.680								
MS9845-18	1.128	1.203	1.760								
MS9845-19	1.190	1.265	1.850								
MS9845-20	1.253	1.328	1.940								

NOTES:

1. MATERIAL: AMS 5616.
2. HARDNESS: ROCKWELL C45-50.
3. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
4. HEAD DIA. TO BE CONCENTRIC WITH SHANK DIA. WITHIN .003 FIR.