

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9918, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9918, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.


THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9918

AS9918

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

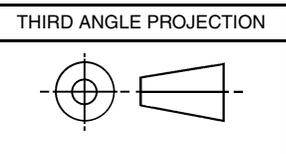

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: NONE




**AEROSPACE STANDARD**

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED  
WASHER HEAD, PD SHANK, STEEL AMS 6322,  
CADMIUM PLATED, .4375-20 UNJF-3A

**AS9918**  
SHEET 1 OF 3

ISSUED 2000-08 REAFFIRMED 2005-05

**AS9918**

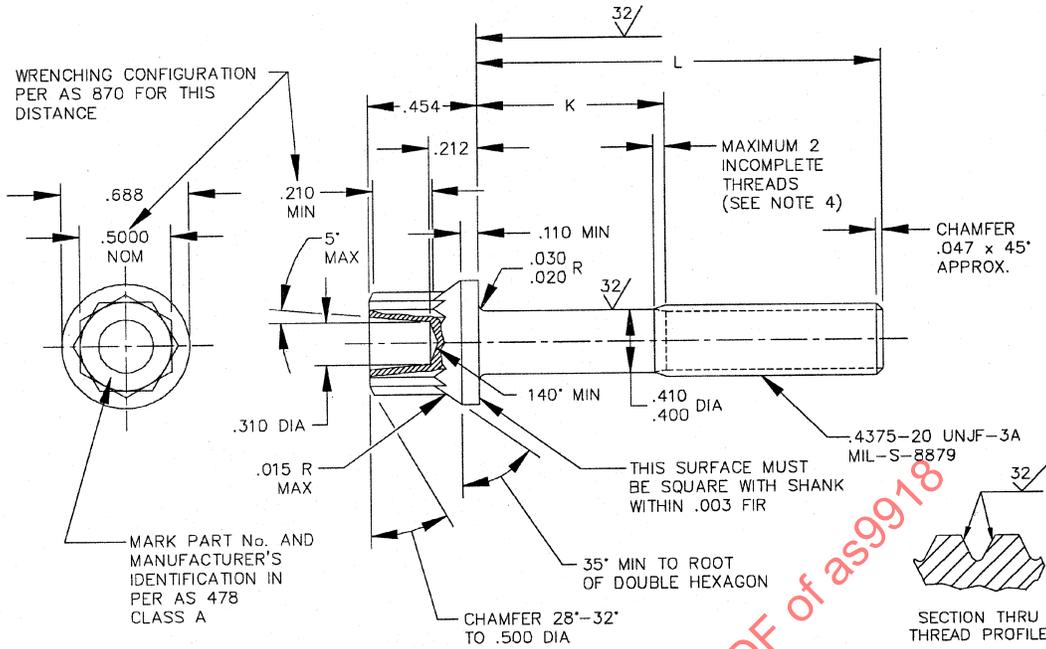

PART No.	L	K	APPROX WEIGHT LB/100
MS9918-04	.688	.105-.125	5.31
MS9918-05	.750	.105-.125	5.54
MS9918-06	.812	.105-.125	5.76
MS9918-07	.875	.105-.125	5.99
MS9918-08	.938	.105-.125	6.22
MS9918-09	1.000	.105-.125	6.45
MS9918-10	1.062	.105-.125	6.68
MS9918-11	1.125	.105-.125	6.90
MS9918-12	1.188	.105-.125	7.13
MS9918-13	1.250	.105-.125	7.36
MS9918-14	1.312	.128-.188	7.59
MS9918-15	1.375	.190-.250	7.82
MS9918-16	1.438	.252-.312	8.05
MS9918-17	1.500	.315-.375	8.27
MS9918-18	1.562	.378-.438	8.50
MS9918-19	1.625	.440-.500	8.73
MS9918-20	1.688	.502-.562	8.96
MS9918-21	1.750	.565-.625	9.19

PART No.	L	K	APPROX WEIGHT LB/100
MS9918-22	1.812	.628-.688	9.41
MS9918-23	1.875	.690-.750	9.64
MS9918-24	1.938	.752-.812	9.87
MS9918-25	2.000	.815-.875	10.10
MS9918-26	2.125	.940-1.000	10.56
MS9918-27	2.250	1.065-1.125	11.01
MS9918-28	2.375	1.190-1.250	11.47
MS9918-29	2.500	1.315-1.375	11.92
MS9918-30	2.625	1.440-1.500	12.38
MS9918-31	2.750	1.565-1.625	12.84
MS9918-32	2.875	1.690-1.750	13.29
MS9918-33	3.000	1.815-1.875	13.75
MS9918-34	3.125	1.940-2.000	14.20
MS9918-35	3.250	2.065-2.125	14.66
MS9918-36	3.375	2.190-2.250	15.12
MS9918-37	3.500	2.315-2.375	15.57
MS9918-38	3.625	2.440-2.500	16.03
MS9918-39	3.750	2.565-2.625	16.49

PART No.	L	K	APPROX WEIGHT LB/100
MS9918-40	3.875	2.690-2.750	16.94
MS9918-41	4.000	2.815-2.875	17.39
MS9918-42	4.125	2.940-3.000	17.85
MS9918-43	4.250	3.065-3.125	18.31
MS9918-44	4.375	3.190-3.250	18.77
MS9918-45	4.500	3.315-3.375	19.22
MS9918-46	4.625	3.440-3.500	19.68
MS9918-47	4.750	3.565-3.625	20.14
MS9918-48	4.875	3.690-3.750	20.59
MS9918-49	5.000	3.815-3.875	21.05
MS9918-50	5.125	3.940-4.000	21.50
MS9918-51	5.250	4.065-4.125	21.96
MS9918-52	5.375	4.190-4.250	22.42
MS9918-53	5.500	4.315-4.375	22.87
MS9918-54	5.625	4.440-4.500	23.33
MS9918-55	5.750	4.565-4.625	23.79
MS9918-56	5.875	4.690-4.750	24.24
MS9918-57	6.000	4.815-4.875	24.70

1. SHANK SHALL BE STRAIGHT WITHIN .0025 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .010 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.