

REV. B

AS9924

FEDERAL SUPPLY CLASS
5306

RATIONALE

RESTORE ORIGINAL MAGNETIC PARTICLE TEST REQUIREMENT, REVISE LIGHTENING HOLE CONFIGURATION TO ALLOW OPTIONAL SHAPE, ADD EDGE DISTANCE EXCEPTION FOR HEAD MARKING, UPDATE THREADS TO AS8879, UPDATE COLD ROLLING DRAWING NOTE, UPDATE SURFACE FINISH REQUIREMENTS, DELETE .015 MAX RADIUS AT BASE OF WRENCH PAD, AND FIGURE 1 REDRAWN

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9924(ASG), NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


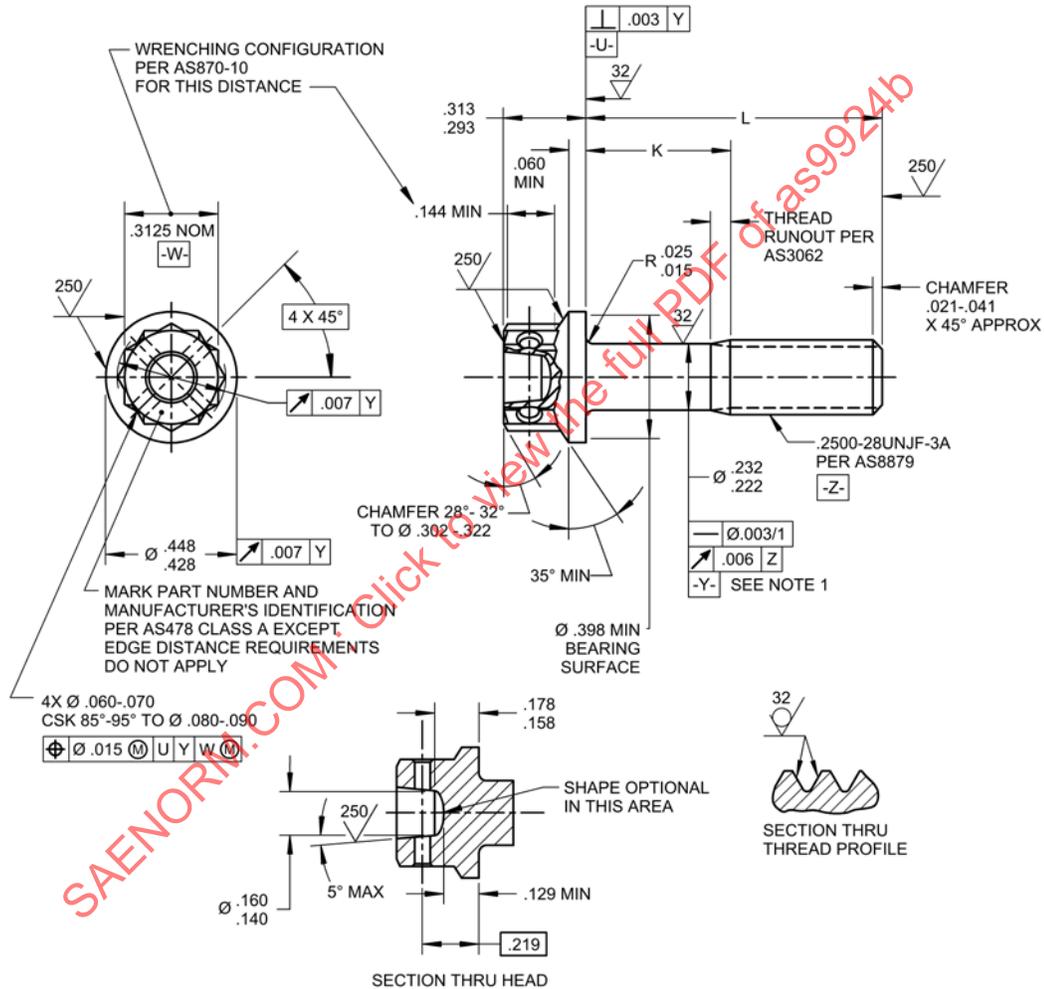


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9924B>



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7452 /3/



AEROSPACE STANDARD

(R) BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, CADMIUM PLATED, STEEL, UNS G87400, 125 KSI MIN, .2500-28 UNJF-3A

AS9924
SHEET 1 OF 3

REV. B

Copyright 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA) Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1998-05 REAFFIRMED 2007-06 REVISED 2015-07

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9924-04	.365-.385	.079-.099	1.20	MS9924-34	2.490-2.510	1.690-1.750	3.63
MS9924-05	.428-.448	.079-.099	1.27	MS9924-35	2.615-2.635	1.815-1.875	3.77
MS9924-06	.490-.510	.079-.099	1.34	MS9924-36	2.740-2.760	1.940-2.000	3.91
MS9924-07	.552-.572	.079-.099	1.41	MS9924-37	2.865-2.885	2.065-2.125	4.05
MS9924-08	.615-.635	.079-.099	1.48	MS9924-38	2.990-3.010	2.190-2.250	4.19
MS9924-09	.678-.698	.079-.099	1.55	MS9924-39	3.115-3.135	2.315-2.375	4.34
MS9924-10	.740-.760	.079-.099	1.63	MS9924-40	3.240-3.260	2.440-2.500	4.48
MS9924-11	.802-.822	.079-.099	1.70	MS9924-41	3.365-3.385	2.565-2.625	4.63
MS9924-12	.865-.885	.079-.125	1.77	MS9924-42	3.490-3.510	2.690-2.750	4.77
MS9924-13	.928-.948	.128-.188	1.84	MS9924-43	3.615-3.635	2.815-2.875	4.91
MS9924-14	.990-1.010	.190-.250	1.90	MS9924-44	3.740-3.760	2.940-3.000	5.06
MS9924-15	1.052-1.072	.252-.312	1.98	MS9924-45	3.865-3.885	3.065-3.125	5.20
MS9924-16	1.115-1.135	.315-.375	2.06	MS9924-46	3.990-4.010	3.190-3.250	5.34
MS9924-17	1.178-1.198	.378-.438	2.13	MS9924-47	4.115-4.135	3.315-3.375	5.49
MS9924-18	1.240-1.260	.440-.500	2.20	MS9924-48	4.240-4.260	3.440-3.500	5.63
MS9924-19	1.302-1.322	.502-.562	2.27	MS9924-49	4.365-4.385	3.565-3.625	5.77
MS9924-20	1.365-1.385	.565-.625	2.34	MS9924-50	4.490-4.510	3.690-3.750	5.92
MS9924-21	1.428-1.448	.628-.688	2.41	MS9924-51	4.615-4.635	3.815-3.875	6.07
MS9924-22	1.490-1.510	.690-.750	2.48	MS9924-52	4.740-4.760	3.940-4.000	6.21
MS9924-23	1.552-1.572	.752-.812	2.55	MS9924-53	4.865-4.885	4.065-4.125	6.34
MS9924-24	1.615-1.635	.815-.875	2.63	MS9924-54	4.990-5.010	4.190-4.250	6.48
MS9924-25	1.678-1.698	.878-.938	2.70	MS9924-55	5.115-5.135	4.315-4.375	6.63
MS9924-26	1.740-1.760	.940-1.000	2.77	MS9924-56	5.240-5.260	4.440-4.500	6.77
MS9924-27	1.802-1.822	1.002-1.062	2.84	MS9924-57	5.365-5.385	4.565-4.625	6.91
MS9924-28	1.865-1.885	1.065-1.125	2.91	MS9924-58	5.490-5.510	4.690-4.750	7.06
MS9924-29	1.928-1.948	1.128-1.188	2.98	MS9924-59	5.615-5.635	4.815-4.875	7.20
MS9924-30	1.990-2.010	1.190-1.250	3.05	MS9924-60	5.740-5.760	4.940-5.000	7.34
MS9924-31	2.115-2.135	1.315-1.375	3.20	MS9924-61	5.865-5.885	5.065-5.125	7.48
MS9924-32	2.240-2.260	1.440-1.500	3.34	MS9924-62	5.990-6.010	5.190-5.250	7.63
MS9924-33	2.365-2.385	1.565-1.625	3.48				

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

- /1/ FOR PART NUMBERS MS9924-04 THRU MS9924-18 DATUM **Z** SHALL REPLACE DATUM **Y**.
2. MATERIAL: LOW ALLOY STEEL AMS6322 (UNS G87400).
- /3/ PROCUREMENT SPECIFICATION: AS7452, EXCEPT HEAD SHALL BE UPSET.
4. HEAD TO SHANK FILET RADIUS: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT. COLD ROLLING SHALL BE SUFFICIENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
5. FINISH: CADMIUM PLATE AMS2400. DIMENSIONS ARE AFTER PLATING.
6. MAGNETIC PARTICLE INSPECTION PER ASTM E1444/E1444M AFTER PLATING.

	AEROSPACE STANDARD (R) BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, CADMIUM PLATED, STEEL, UNS G87400, 125 KSI MIN, .2500-28 UNJF-3A	AS9924 SHEET 2 OF 3	REV. B