

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV.  
A**

**SAE AS9956**

FEDERAL SUPPLY CLASS  
5330

**RATIONALE**

AS9956A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

**NOTICE**


THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9956. THIS STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LIST (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9956a

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9956A>

THIRD ANGLE PROJECTION

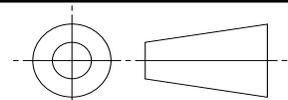

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: NONE

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

PACKING, PREFORMED (PTFE) - AMS3668, SEAL

**SAE AS9956**  
SHEET 1 OF 3

**REV.  
A**

ISSUED 1998-11 REVISED 2008-08 REAFFIRMED 2012-11

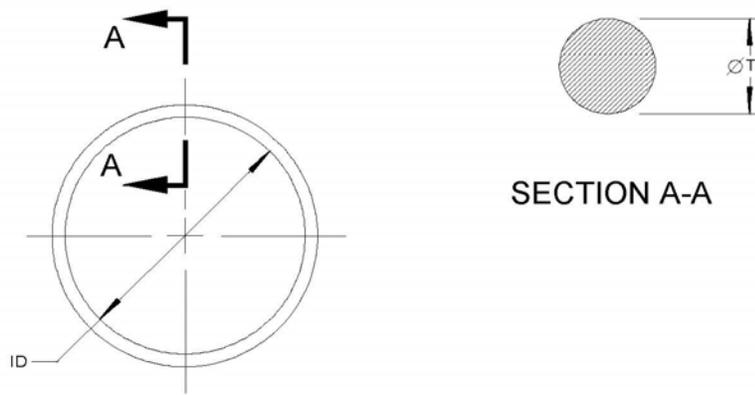


FIGURE 1

TABLE 1 - DIMENSIONS

PART NUMBER	TUBE OD REF	ID		ØT		APPROX MASS LB/100
		MIN	MAX	MIN	MAX	
MS9956-01	.0938	.180	.190	.053	.059	.015
MS9956-02	.1250	.234	.244	.061	.067	.024
MS9956-03	.1875	.296	.306	.061	.067	.029
MS9956-04	.2500	.346	.356	.069	.075	.042
MS9956-05	.3125	.409	.419	.069	.075	.048
MS9956-06	.3750	.463	.473	.075	.081	.064
MS9956-07	.4375	.525	.535	.079	.085	.080
MS9956-08	.5000	.639	.649	.084	.090	.107
MS9956-09	.5625	.701	.711	.094	.100	.145
MS9956-10	.6250	.750	.760	.094	.100	.154
MS9956-11	.6875	.858	.868	.112	.120	.254
MS9956-12	.7500	.918	.930	.112	.120	.260
MS9956-13	.8125	.980	.992	.112	.120	.285
MS9956-14	.8750	1.041	1.053	.112	.120	.301
MS9956-16	1.0000	1.165	1.177	.112	.120	.333
MS9956-18	1.1250	1.349	1.361	.112	.120	.381
MS9956-20	1.2500	1.465	1.485	.114	.122	.427
MS9956-24	1.5000	1.710	1.730	.114	.122	.492
MS9956-28	1.7500	2.080	2.100	.114	.122	.592
MS9956-32	2.0000	2.327	2.347	.114	.122	.658

SAENORM.COM Click to view the tube PDF of MS9956a