

Submitted for recognition as an American National Standard

**Performance Criteria for Falling Object Protective
Structures (FOPs) Industrial Machines**

Foreword—This Document has also changed to comply with the new SAE Technical Standards Board Format. Scope is now Section 1, Purpose is now 1.1, and References are now Section 2.

1. Scope—This standard applies to General Purpose Industrial Machines, as described in SAE J1116, which are equipped with Rollover Protective Structures (ROPS).

1.1 Purpose—This SAE Standard establishes performance criteria for Falling Object Protective Structures (FOPS) intended to provide operators of general purpose industrial machines with overhead protection from objects such as bricks, concrete blocks, and small hand tools that may fall from heights of not more than 9 m (30 ft) above the ground, encountered in operations such as highway maintenance, landscaping, and other services on construction sites where the falling object develops an energy not to exceed 1360 J (1000 ft-lbf).

2. References

2.1 Applicable Publications—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated the latest revision of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J397—Deflection Limiting Volume—ROPS/FOPS Laboratory Evaluation

SAE J1040—Performance Criteria for Rollover Protective Structures (ROPS) for Construction, Earthmoving, Forestry, and Mining Machines

SAE J1119—Steel Products for Rollover Protective Structures (ROPS) and Falling Object Protective Structures (FOPS)

SAE J1164—Labeling of ROPS and FOPS

2.1.2 ASTM PUBLICATIONS—Available from ASTM, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM A370—Standard Methods and Definitions for Mechanical Testing of Steel products

2.1.3 ANSI PUBLICATIONS—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ISO 3449—Earthmoving machinery—Falling object protective structures laboratory test and performance requirements

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

**QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243
TO PLACE A DOCUMENT ORDER; (724) 776-4970 FAX: (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>**

3. Facilities

- 3.1 A solid spherical steel or ductile iron mass of 45 kg (100 lb), hereinafter referred to as the drop object.
- 3.2 A means of raising the drop object to the required height.
- 3.3 A means of releasing the drop object so that it drops without vertical restraint. A means to guide the drop object may be used, however, it shall be so constructed that it does not retard the free vertical fall of the drop object.
- 3.4 A support surface of such firmness that it shall not be penetrated by the machine or test bed under the loading of the drop test.
- 3.5 A means of determining if the FOPS enters the Deflection Limiting Volume (DLV, see SAE J397) during the drop test. This may be either of the following:
 - 3.5.1 A DLV in the upright attitude, made of a material which will indicate any penetration by the FOPS. (Grease may be put on the top surface of the DLV to indicate such penetration.)
 - 3.5.2 A dynamic instrumentation system of sufficient frequency response to indicate the total FOPS deflection with respect to the DLV within an accuracy of $\pm 5\%$.

NOTE—DLV should be fixed firmly to the same part of machine to which the operator seat is secured and is to remain there during the entire test.

4. Machine or Test Bed Condition

- 4.1 The FOPS to be evaluated must be attached to the machine structure as it will be in actual machine use. A complete machine is not required, however, the portion to which the FOPS is mounted must be identical to the actual structure, and the vertical stiffness of a test bed must be not less than that of an actual machine as described in 4.2. The machine or test bed shall be placed on the surface described in 3.4.
- 4.2 If the FOPS is mounted on a machine, the following stipulations apply:
 - 4.2.1 No limitations on customary attachments and/or payload.
 - 4.2.2 All ground engaging tools shall be in normal carry positions.
 - 4.2.3 All suspension systems, including pneumatic tires, shall be set at operating levels. Variable suspensions shall be in the "hard" range.
- 4.3 All cab elements, such as windows, removable panels, or structural fittings are to be removed so that they do not contribute to the strength of the FOPS.

5. Drop Test Procedure

- 5.1 The drop object shall be placed on top of the FOPS at the location designated in 5.2, 5.3, and 5.4.
- 5.2 The projected diameter of the drop object is to be entirely within the vertical projection of the DLV on the FOPS top.

5.3 Within the limitations of 5.2, the drop object shall be so placed that it has the least possible distance from the centroid of the FOPS top. (The area whose centroid is referred to is that portion of the FOPS cover that is not over major upper, structural members.) See Figure 1.

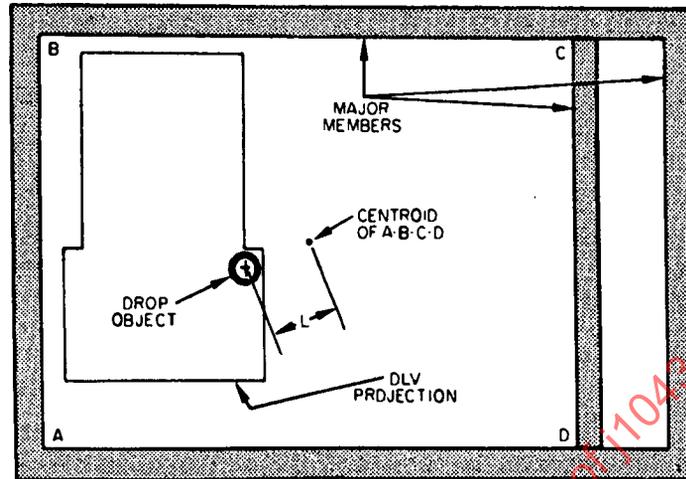


FIGURE 1—

5.4 Should the vertical projection of the DLV be divided into two or more segments by vertical projections of major, upper structural members, the directions of 5.2 and 5.3 shall apply to the segment(s) containing the greatest area of the DLV projection. See Figure 2.

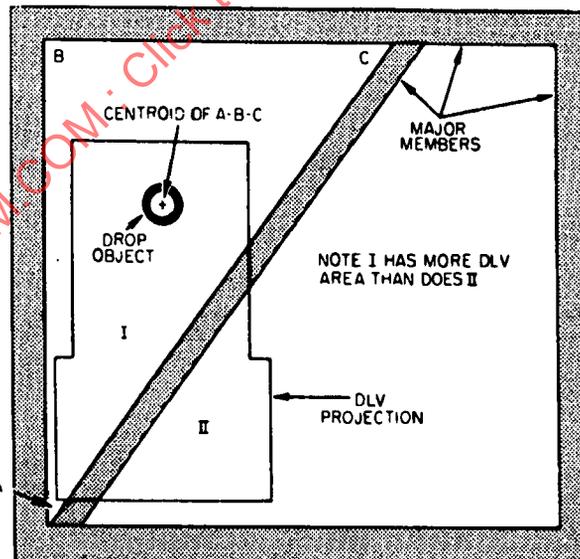


FIGURE 2—

NOTE—Where other materials or different thicknesses are used in different segments above the DLV, each segment in turn shall be subject to a drop test. If design features such as cutouts for windows or equipment, or variations in cover material or thickness indicate a more vulnerable location could obviously be selected within the vertical projection of the DLV, the drop location should be adjusted to that location. In addition, if cutouts in the FOPS cover are intended to be filled with devices or equipment to provide adequate protection, those devices or equipment must be in place during the drop test.

- 5.5 The drop object is to be raised vertically 3 m (10 ft) above the position indicated in 5.2, 5.3, or 5.4.
- 5.6 The drop object is to be released so that it falls onto the FOPS (see 3.3).
- 5.7 The center of initial impact of the drop object shall fall within a circle of 100 mm (4 in) radius. The center of this circle is to coincide with the vertical centerline of the object as positioned per 5.1, 5.2, 5.3, and 5.4, but not on any major, upper horizontal member. There is no limitation on location of subsequent (rebound) impacts.
6. **Performance Requirements**
- 6.1 The DLV shall not be entered by any deflection of the FOPS, or by the drop object. The FOPS top shall completely cover and overlap the vertical projection of the DLV.
- 6.2 The FOPS shall also meet the applicable performance criteria for a rollover protective structure (SAE J1040). (Identical, but not necessarily the same, structures are to be used for the FOPS and ROPS evaluations. Should the same structure be used for both evaluations, the drop test procedure shall precede the ROPS loading, with removal of impact dents or replacement of the FOPS cover permissible.)
- 6.3 The drop test shall be performed with all ROPS and FOPS members at -18°C (0°F) or below, or the material used in the FOPS cover shall exhibit one of the Charpy V notch impact strengths at -30°C (-20°F) shown in Table 1. See SAE J1119 for explanation of impact toughness on materials less than 4 mm (0.15 in) thick.

TABLE 1—CHARPY V NOTCH IMPACT STRENGTHS

Specimen Size, mm	J	ft-lb	Specimen Size, mm	J	ft-lb
10 x 10 ⁽¹⁾	11.0	8.0	10 x 6	8.0	6.0
10 x 9	10.0	7.5	10 x 5 ⁽¹⁾	7.5	5.5
10 x 8	9.5	7.0	10 x 4	7.0	5.0
10 x 7.5 ⁽¹⁾	9.5	7.0	10 x 3.3	6.0	4.5
10 x 7	9.0	6.5	10 x 3	6.0	4.5
10 x 6.7	8.5	6.5	10 x 2.5 ⁽¹⁾	5.5	4.0

1. Indicates preferred size. Specimen size shall be no less than the largest preferred size that the material will permit.

Reference: ASTM A 370, Standard Methods and Definitions for Mechanical Testing of Steel Products.

7. **Labeling**—The FOPS shall be labeled according to SAE J1164. The protection afforded (see 1.1) should be described in the operator's manual and/or referenced on the label.

PREPARED BY THE SAE MACHINE TEST PROCEDURES SUBCOMMITTEE