

Submitted for recognition as an American National Standard

## One-Way Clutches—Nomenclature and Terminology

1. **Scope**—The definitions and illustrations in this SAE Information Report are intended to establish common nomenclature and terminology for automotive transmission one-way clutches.
- 1.1 **Definitions**—A mechanical device to transmit torque in one direction and permit free rotation in the opposite direction.
2. **References**—There are no referenced publications specified herein.
3. **Most Commonly Used Types**
  - 3.1 **Roller Clutch**—A clutch having cylindrical elements which engage cam profiles on either the outer or inner elements.
  - 3.2 **Sprag Clutch**—A clutch having cam-profiled locking elements which engage cylindrical outer and inner races.
4. **Roller Clutch**
  - 4.1 **Function Types**
    - 4.1.1 **SPRING ENERGIZED**—A clutch which has the roller held in contact with the cam and race by individual springs, or by means of a spring actuated cage.
    - 4.1.2 **CENTRIFUGALLY ENERGIZED**—A clutch which has no mechanical means for holding the roller in contact with the cam and race.
    - 4.1.3 **CENTRIFUGALLY DISENGAGING**—A clutch in which the rollers move out of contact with the race in over-running conditions.
  - 4.2 **Arrangements**
    - 4.2.1 **OUTER CAM CLUTCH**—A roller clutch which has the cam profile surfaces on the outer element. (See Figures 1, 2, and 3.)

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TO PLACE A DOCUMENT ORDER; (724) 776-4970 FAX: (724) 776-0790  
SAE WEB ADDRESS <http://www.sae.org>

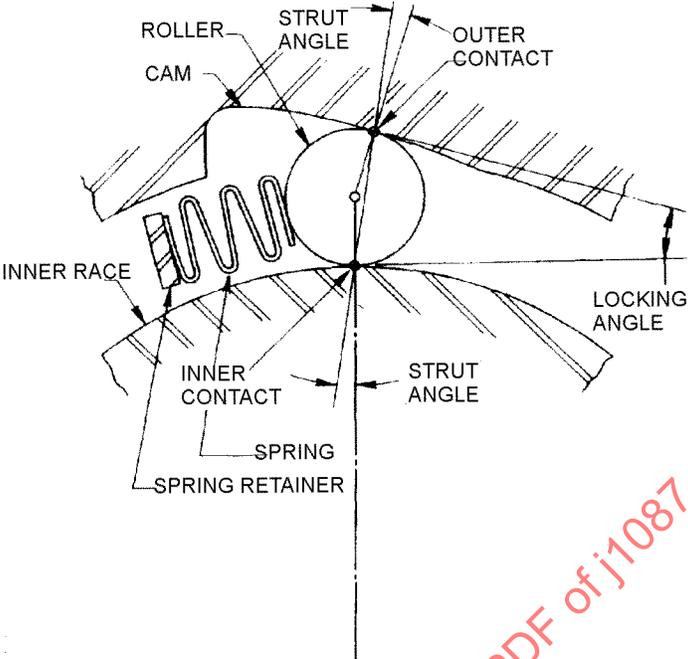


FIGURE 1—OUTER CAM TYPE LOOSE ROLLER CLUTCH DIAGRAM

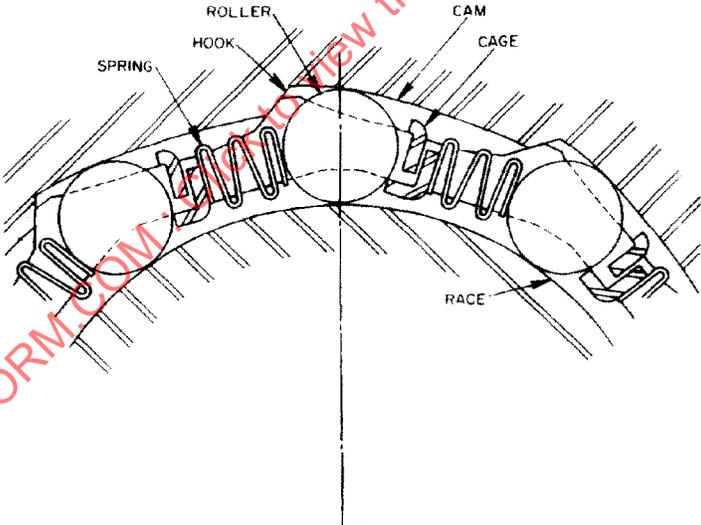


FIGURE 2—CAGED ROLLER OUTER CAM TYPE CLUTCH DIAGRAM (HOOK TYPE CAM)

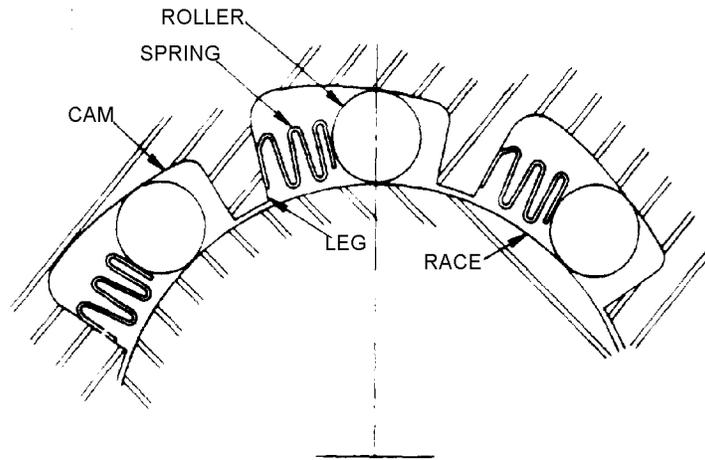


FIGURE 3—LOOSE ROLLER TYPE CLUTCH DIAGRAM (LEG TYPE CAM)

4.2.2 INNER CAM CLUTCH—A roller clutch which has the cam profile surfaces on the inner element. (See Figure 4.)

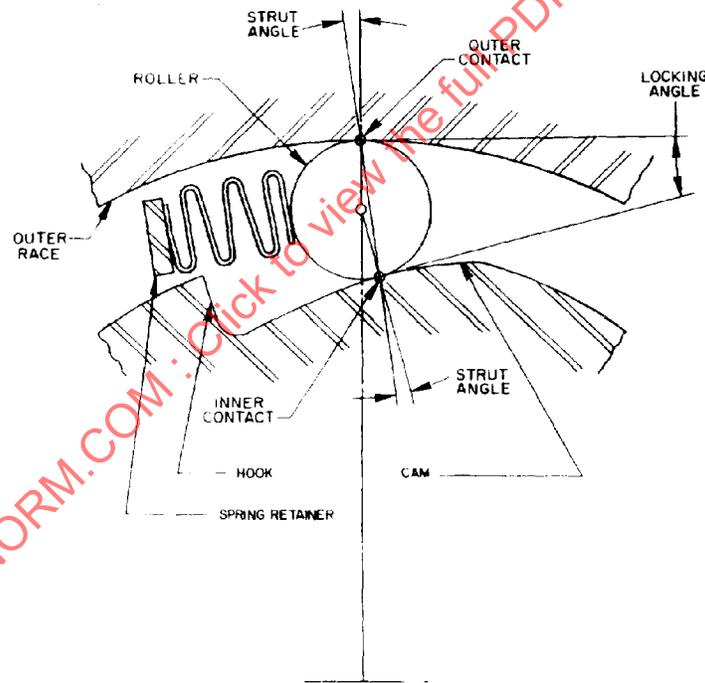


FIGURE 4—INNER CAM TYPE ROLLER ONE-WAY CLUTCH DIAGRAM

4.2.3 CAGED ROLLER CLUTCH—A roller clutch which has the rollers and springs contained as a unit. (See Figure 2.)

4.2.4 LOOSE ROLLER CLUTCH—A roller clutch which has the rollers individually placed between the cam and race, not located by a cage. (See Figure 1, 3, and 4.)

### 4.3 Nomenclature

- 4.3.1 CAM—That element of the clutch that contains the ramped profiles through which the rollers transmit torque.
- 4.3.1.1 *Leg Type*—A cam which has integral legs projecting into the space between the rollers to provide reaction for the springs and may provide radial location of the race relative to the cam. (See Figure 3.)
- 4.3.1.2 *Hook Type*—A cam which has no legs, thereby forming "hooks" at the free wheeling end of the cam ramps. (See Figure 1, 2, and 4.)
- 4.3.2 RACE—That element of the clutch providing the cylindrical surface through which the rollers transmit torque. (See Figure 1, 2, 3, and 4.)
- 4.3.3 ROLLER—The cylindrical locking element of the clutch. Several are usually used in each clutch. (See Figures 1, 2, 3, and 4.)
- 4.3.4 ENERGIZING SPRING—A spring used to actuate the roller into contact with the cam and race. (See Figures 1, 2, 3, and 4.)
- 4.3.5 CAGE—An element primarily used to contain the springs and rollers. (See Figure 2.)
- 4.3.6 SPRING RETAINER—That element which locates and provides reaction for the spring in loose roller clutches. (See Figure 1 and 4.)

### 4.4 Roller Clutch Terminology

- 4.4.1 CAM OR LOCKING ANGLE—The angle between lines drawn tangent to the cam and race at the contact points of the roller (equal to twice the strut angle). (See Figures 1 and 4.)
- 4.4.2 STRUT ANGLE—The angle between a line connecting the contact points of the roller at the cam and race and a radial line from the roller center to either contact point. (See Figures 1 and 4.)

## 5. Sprag Clutch

### 5.1 Functional Types

- 5.1.1 CENTRIFUGALLY ENGAGING—A clutch in which the sprags maintain contact, increasing sprag force with both races when acted upon by centrifugal force.
- 5.1.2 CENTRIFUGALLY DISENGAGING—A clutch in which the sprags move out of contact, decreasing sprag force with the inner race when acted upon by centrifugal force.

### 5.2 Arrangements

- 5.2.1 CAGED SPRAG CLUTCH—A clutch that utilizes one or more cages to space or control the sprag elements. (See Figures 5 and 6.)

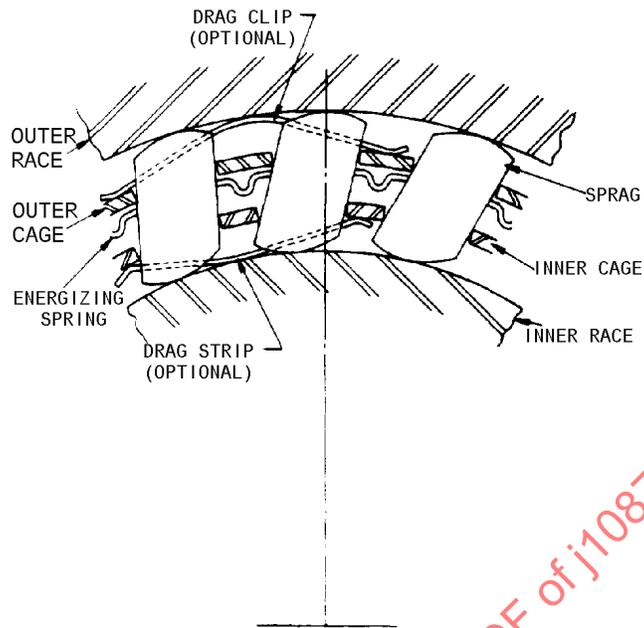


FIGURE 5—TYPICAL DOUBLE-CAGE SPRAG ONE-WAY CLUTCH DIAGRAM

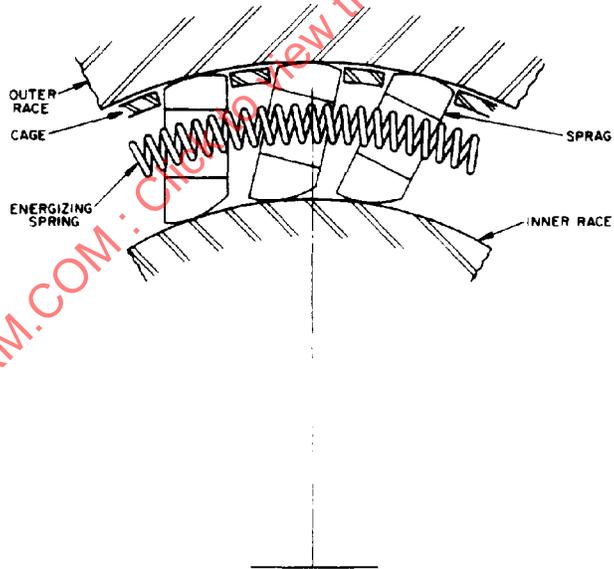


FIGURE 6—TYPICAL SINGLE-CAGE ONE-WAY CLUTCH DIAGRAM

5.2.2 FULL COMPLEMENT SPRAG CLUTCH—A clutch in which the sprag configuration provides circumferential spacing. (See Figure 7.)

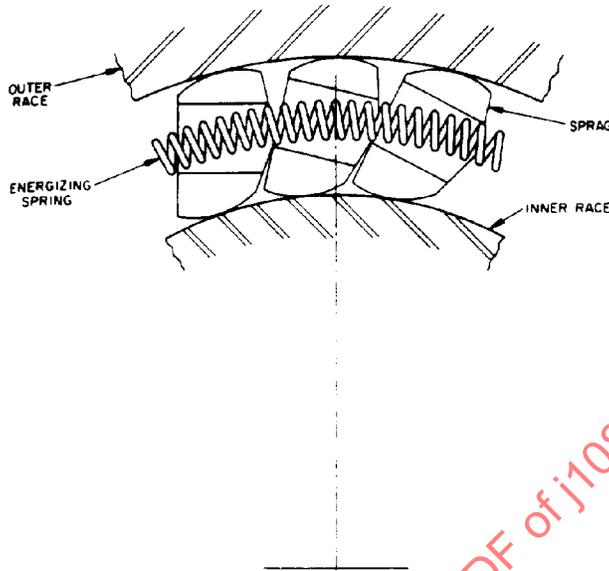


FIGURE 7—TYPICAL FULL COMPLEMENT SPRAG ONE-WAY CLUTCH DIAGRAM

5.3 Nomenclature

5.3.1 OUTER RACE—That element which provides the outer cylindrical surface through which the sprags transmit torque. (See Figures 5, 6, 7, and 8.)

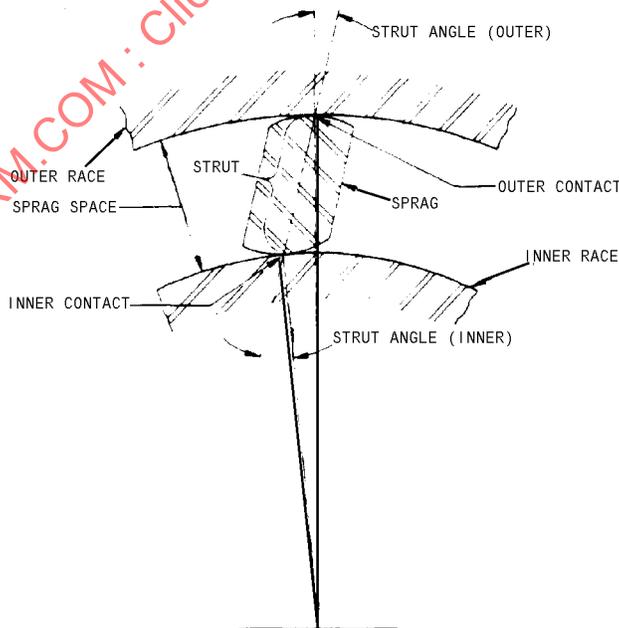


FIGURE 8—SPRAG ONE-WAY CLUTCH DIAGRAM