



SURFACE VEHICLE RECOMMENDED PRACTICE	J1096™	APR2021
	Issued 1976-03 Reaffirmed 2000-05 Stabilized 2021-04	
Superseding J1096 MAY2000		
Measurement of Exterior Sound Levels for Heavy Trucks Under Stationary Conditions		

RATIONALE

The technical committee determines that the using community is moving towards newer technology and would like to alert users that this newer technology exists which may want to be considered for new design. However, because the technical committee has no complete visibility of where and how a technical report is being used, and because a technical report may be necessary to support legacy platforms or design reuse, the technical report should not be cancelled but rather stabilized with a rationale statement that alerts users to new technology.

STABILIZED NOTICE

This document has been declared "Stabilized" by the SAE Light Vehicle Exterior Sound Level Standards Committee and will no longer be subjected to periodic reviews for currency. Users are responsible for verifying references and continued suitability of technical requirements. Newer technology may exist.

SAENORM.COM : Click to view the full PDF of J1096 - 202104

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

For more information on this standard, visit
https://www.sae.org/standards/content/J1096_202104

1. **Scope**—This SAE Recommended Practice establishes the test procedure, environment, and instrumentation for determining the maximum exterior sound level of highway motor trucks and truck tractors over 4540 kg gross vehicle weight rating (GVWR) with governed engines under stationary vehicle conditions. The basic procedure involves a full throttle engine acceleration and a closed throttle deceleration with the engine inertia as the load.
2. **References**
 - 2.1 **Applicable Publications**—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply.
 - 2.1.1 SAE PUBLICATION—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.
SAE J184—Qualifying a Sound Data Acquisition System
 - 2.1.2 ANSI PUBLICATIONS—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.
ANSI S1.4-1983 and S1.4A-1985—Specification for Sound Level Meters
ANSI S1.40-1984—Specification for Acoustical Calibrators
 - 2.1.3 ISO PUBLICATION—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.
ISO 5130-1982—Acoustics—Measurements of noise emitted by stationary road vehicles—Survey method
 - 2.1.4 DOT PUBLICATION—Available from The Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.
DOT/BMCS Title 40, Part 325, Subpart E—Exterior Noise Regulation for Commercial Vehicles

SAENORM.COM : Click to view the full PDF of J1096 - 202104

3. **Instrumentation**—The following instrumentation shall be used, where applicable, for the measurement required.
- 3.1 A sound level meter which satisfies the Type 1 or S1A requirements of American National Standard Specification for Sound Level Meters, ANSI S1.4-1983 and S1.4A-1985.
- 3.2 As an alternative to making direct measurements using a sound level meter, a microphone or sound level meter may be used with a magnetic tape recorder and/or a graphic level recorder or other indicating instrument, providing the system meets the requirements of SAE J184.
- 3.3 A sound level calibrator, accurate to ± 0.5 decibel (dB) which satisfies the requirements of ANSI S1.40-1984.
- 3.4 A windscreen may be used. The windscreen shall not affect the microphone response more than ± 1 dB for frequencies of 20 to 4000 Hz or $\pm 1-1/2$ dB for frequencies of 4000 to 10 000 Hz . (See 6.1).
- 3.5 An engine-speed tachometer accurate to within $\pm 2\%$ of full scale.
4. **Test Site**—The following test site requirements shall be considered necessary to perform effective measurements for this stationary procedure.
- 4.1 A suitable test site shall consist of a flat open space free of large reflecting surfaces, such as parked vehicles, signboards, buildings, or hillsides, located within 30 m of either the vehicle or the microphone. See Figure 1.

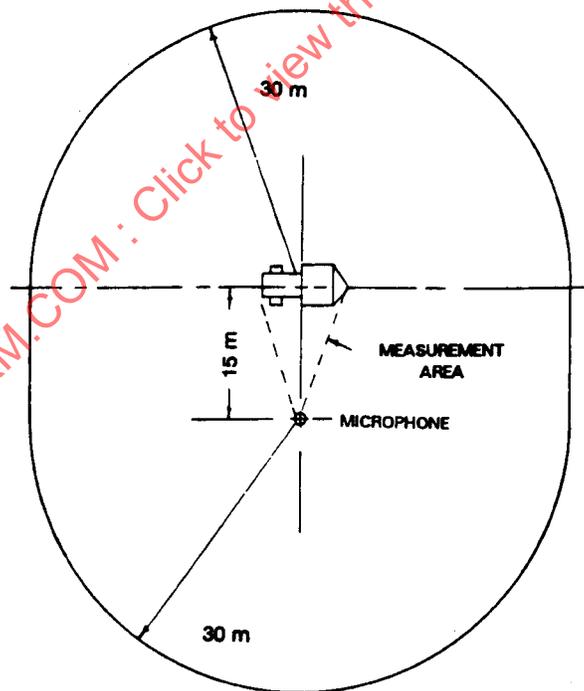


FIGURE 1—TEST SITE CONFIGURATION

- 4.2** The measurement area (defined as shown in Figure 1, including the area under the test vehicle) shall be surfaced with concrete, asphalt, or similar hard nonporous material, and shall be free of snow, grass, soil, ashes, or other sound-absorbing materials. Trailers or semitrailers are to be neglected when determining the measurement area.
- 4.3** The microphone shall be located 15 m from the centerline of the vehicle and 1.2 m above the ground plane as shown in Figure 1. The microphone shall be located on a line perpendicular to the vehicle centerline and in line with the rear of the cab.
- 4.4** Because bystanders have an appreciable influence on meter response when they are in the vicinity of the vehicle or microphone, not more than one person, other than the observer reading the meter, shall be within 15 m of the vehicle or instrument, and that person shall be directly behind the observer reading the meter, on a line through the microphone and the observer.
- 4.5** The ambient sound level (including wind effects) coming from sources other than the vehicle being measured shall be at least 10 dB lower than the level of the tested vehicle.

5. Procedure

- 5.1** The vehicle shall be tested in a stationary position with maximum engine acceleration and deceleration with no external load applied.
- 5.1.1 The engine governor and throttle delay (if one is installed) shall be set to the manufacturer's specifications.
- 5.1.2 The vehicle engine coolant temperature shall be raised to the normal operating range.
- 5.1.3 The vehicle shall be positioned at the test site as shown in Figure 1, with the main transmission in neutral and the clutch engaged.
- 5.1.4 The engine shall be accelerated, by rapidly establishing full throttle, from a low idle condition to the maximum governed speed. After the engine speed has been stabilized (3 to 5 s), the engine shall be decelerated at closed throttle to low idle speed.

5.2 Measurements

- 5.2.1 The sound level meter shall be set for fast response and the A-weighting network. Equivalent settings shall be used with other instruments.
- 5.2.2 The meter shall be observed during the entire engine acceleration-deceleration cycle. The applicable reading shall be the highest sound level obtained during this cycle. Unrelated peaks due to extraneous ambient noises should be ignored.
- 5.2.3 The sound level for each side of the vehicle shall be the average of the first two highest readings which are within 1 dB of each other. Report the sound level for the side of the vehicle with the highest average value.

6. General Comments

- 6.1** Measurements shall be made only when wind speed is below 19 km/h. The microphone windscreen may be used to minimize effects of wind gusts and other changes in wind speed. See 4.5.
- 6.2** It is strongly recommended that persons technically trained and experienced in the current techniques of sound measurement select the equipment and conduct the tests.