

Submitted for recognition as an American National Standard

**(R) SAE Nodal Mount**

- 1. Scope**—This SAE Recommended Practice establishes a single bolt pattern for the No. 1 clutch housing (see Figure 1) and the No. 2 clutch housing (see Figure 2).

These four bolt patterns are designated to give commonality of mounting brackets in existing frame rails.

The 420 mm (16.5 in) span, pad face to pad face, allows the ease of installation in existing frame rail widths. This is also the minimum spacing which will accommodate commonly used clutches.

- 2. References**—There are no referenced publications specified herein.

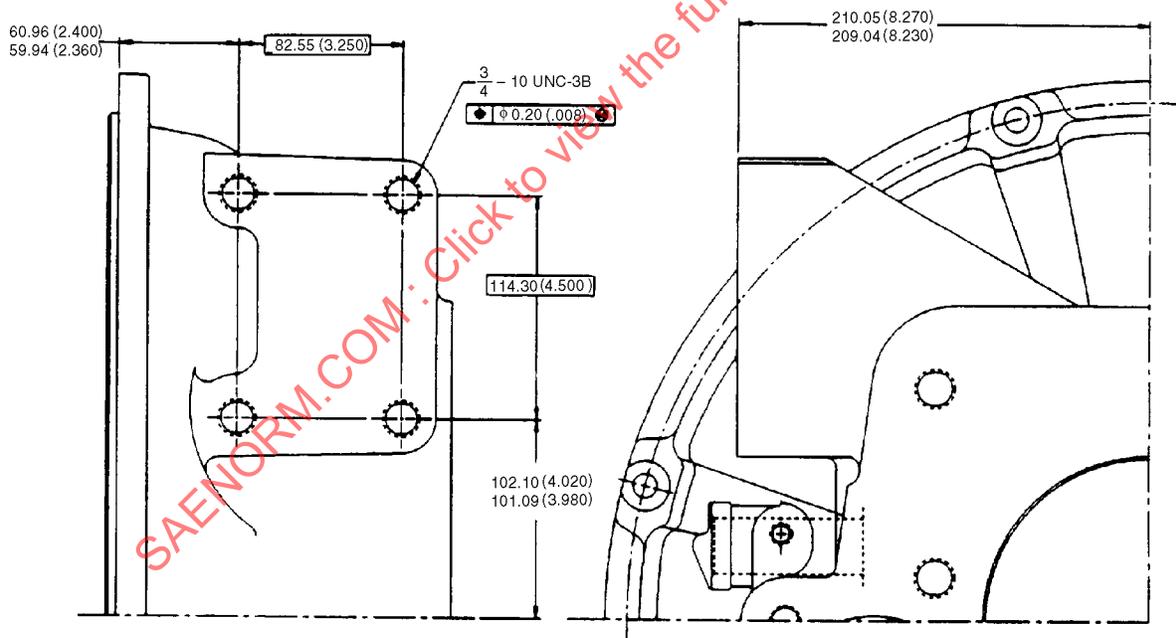


FIGURE 1—NODAL MOUNT—SAE NO. 1

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TO PLACE A DOCUMENT ORDER: (724) 776-4970 FAX: (724) 776-0790  
SAE WEB ADDRESS <http://www.sae.org>

SAE J1134 Reaffirmed APR2000

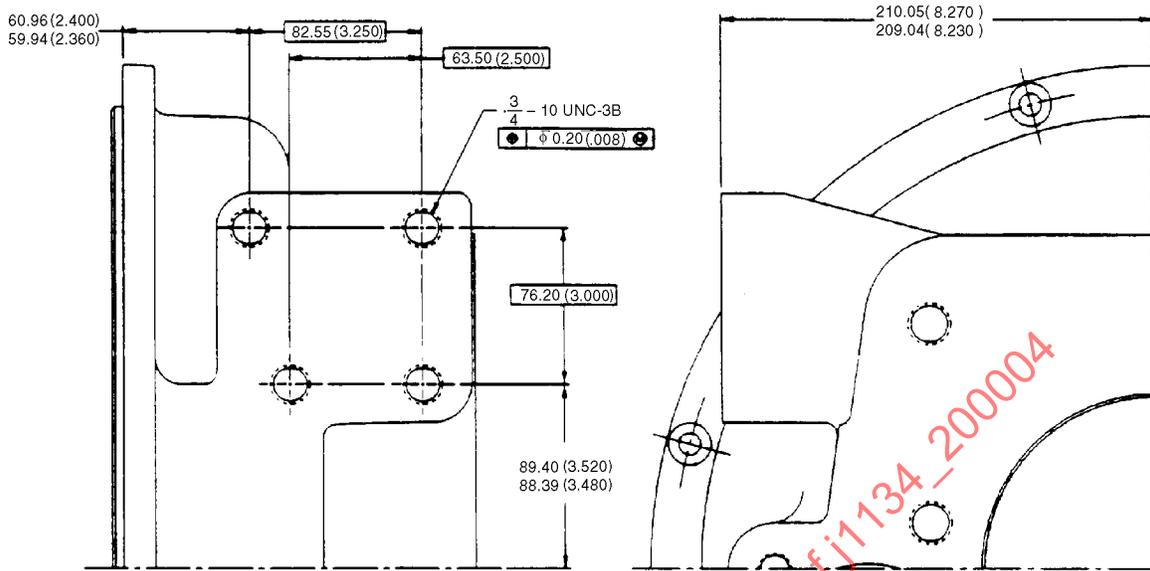


FIGURE 2—NODAL MOUNT—SAE NO. 2

3. Notes

- 3.1 **Marginal Indicia**—The change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. An (R) symbol to the left of the document title indicates a complete revision of the report.

PREPARED BY THE SAE TRUCK AND BUS TRANSMISSION SUBCOMMITTEE OF THE  
SAE TRUCK AND BUS POWERTRAIN COMMITTEE