

Issued 1979-03
Reaffirmed 1995-06

Superseding J1244 AUG88

Submitted for recognition as an American National Standard

OIL COOLER NOMENCLATURE AND GLOSSARY

Foreword—This Document has not changed other than to put it into the new SAE Technical Standards Board format.

1. **Scope**—This SAE Recommended Practice presents general nomenclature and glossary of terms for oil coolers.
 - 1.1 **Type of Applications**—Oil coolers covered in this document are used for cooling of hydrostatics, bearings, differentials, transmissions, engines, power steering, aircraft, and stationary systems.
 - 1.2 **Types of Unit**—The basic types are oil to air and oil to water or other liquids. See Nomenclature (Figure 1 to Figure 8) for examples.
2. **References**—There are no referenced publications specified herein.
3. **Definitions of Oil Cooler Terms**
 - 3.1 **Baffle**—A partition which directs flow of fluids across the core. See Figure 2 in Nomenclature.
 - 3.2 **Baffle Cut**—Expresses percentage of area removed from baffle. See Figure 2 in Nomenclature.
 - 3.3 **Baffle Spacing**—Distance between adjacent baffles.
 - 3.4 **Bonnet**—Collector or manifold on end of shell and tube heat exchanger which directs flow of tube-side fluid.
 - 3.5 **Core**—That section of an oil cooler assembly which is comprised of the heat transfer surfaces.
 - 3.6 **End Zone**—Space between first or last baffle and adjacent tube sheet (or header) of a shell and tube oil cooler.
 - 3.7 **Face Area**—Area defined by the core width times core height. (Oil to air coolers.)
 - 3.8 **Face Velocity**—The velocity of air approaching the core.

NOTE—Volume per unit time divided by face area.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243
TO PLACE A DOCUMENT ORDER; (724) 776-4970 FAX: (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

SAE J1244 Reaffirmed JUN95

3.9 Fin—Extended Heat Transfer Surface

See Figure 1, Figure 4, Figure 6A, and Figure 6B in Nomenclature.

NOTE—Shell and tube oil coolers may have fins or other extended surface.

3.10 Fixed Bundle Oil Cooler—A shell and tube heat exchanger with the tube bundle permanently installed in the shell. See Figure 3 in Nomenclature.

3.11 Fouling Factor—See Fouling Resistance.

3.12 Fouling Resistance—The resistance to heat transfer resulting from accumulation of foreign material on the heat transfer surfaces of an oil cooler.

3.13 Header—This term has a dual meaning. It is sometimes used synonymously with tube sheet or tank. See Figure 2, Figure 3, Figure 6A, and Figure 6B in Nomenclature.

3.14 Heat Dissipation—The quality of heat, usually expressed in kilowatts (British Thermal Units per minute), that an oil cooler can dissipate under specified conditions.

3.15 Inlet Temperature Differential—The difference in temperature between the fluid being cooled and the cooling medium at the point each enters the heat exchanger.

3.16 Manifold—See Tank or Bonnet. Refer to Figure 1, Figure 6A, Figure 6B, Figure 7, and Figure 8 in Nomenclature.

3.17 Multi-Pass Oil Cooler—An oil cooler that is so circuited that either fluid passes across or through the core more than once.

3.18 Oil Cooler Pressure Relief Valve—A pressure differential activated device which allows oil to bypass the oil cooler.

NOTE—Commonly used for protection under low temperature, high viscosity conditions, or any pressure surge condition where inlet pressure can become excessive.

3.19 Oil Cooler Thermostat—A temperature activated device in the oil cooler circuit, which can either by-pass oil around or modulate oil flow through the cooler.

NOTE—This device regulates oil cooler heat transfer to allow rapid heating of oil at start up or prevent excessive cooling under light load conditions.

3.20 Operating Pressure—That fluid pressure to which the oil cooler is normally exposed during operation.

3.21 Partition—A device that is installed in a manifold, header, bonnet, or tank to create multiple pass of fluids through the core.

3.22 Peak Pressure—The highest pressure to which the oil cooler is intermittently subjected.

3.23 Pressure Drop—The pressure differential between inlet and outlet at a specified fluid flow rate and viscosity.

- a. Air side is measured in millimeters (inches) of water.
- b. Oil side is measured in kPa (psi).
- c. Water side is measured in kPa (psi).

3.24 Removable Tube Bundle Oil Cooler—A shell and tube heat exchanger utilizing seals between the shell and tube fluids allowing the tube bundle to be removed from the shell.

NOTE—Normally used to provide for disassembly and/or thermal expansion. See Figure 2 in Nomenclature.

3.25 Tank—An enclosure, located at the inlet and/or outlet of an oil cooler, which is sealed against the tube sheet or individual tubes and distributes the tube side fluid into the tubes or collects the tube side fluid as it exists the tubes. See Figure 6A and Figure 6B in Nomenclature.

3.26 Tube Sheet—See Figure 2 and Figure 3 in Nomenclature.

3.27 Turbulator—A device that increases fluid turbulence for the purpose of increasing heat transfer.

NOTE—For typical configurations, see Figure 1, Figure 5, Figure 6A, Figure 6B, and Figure 8 in Nomenclature.

4. Nomenclature

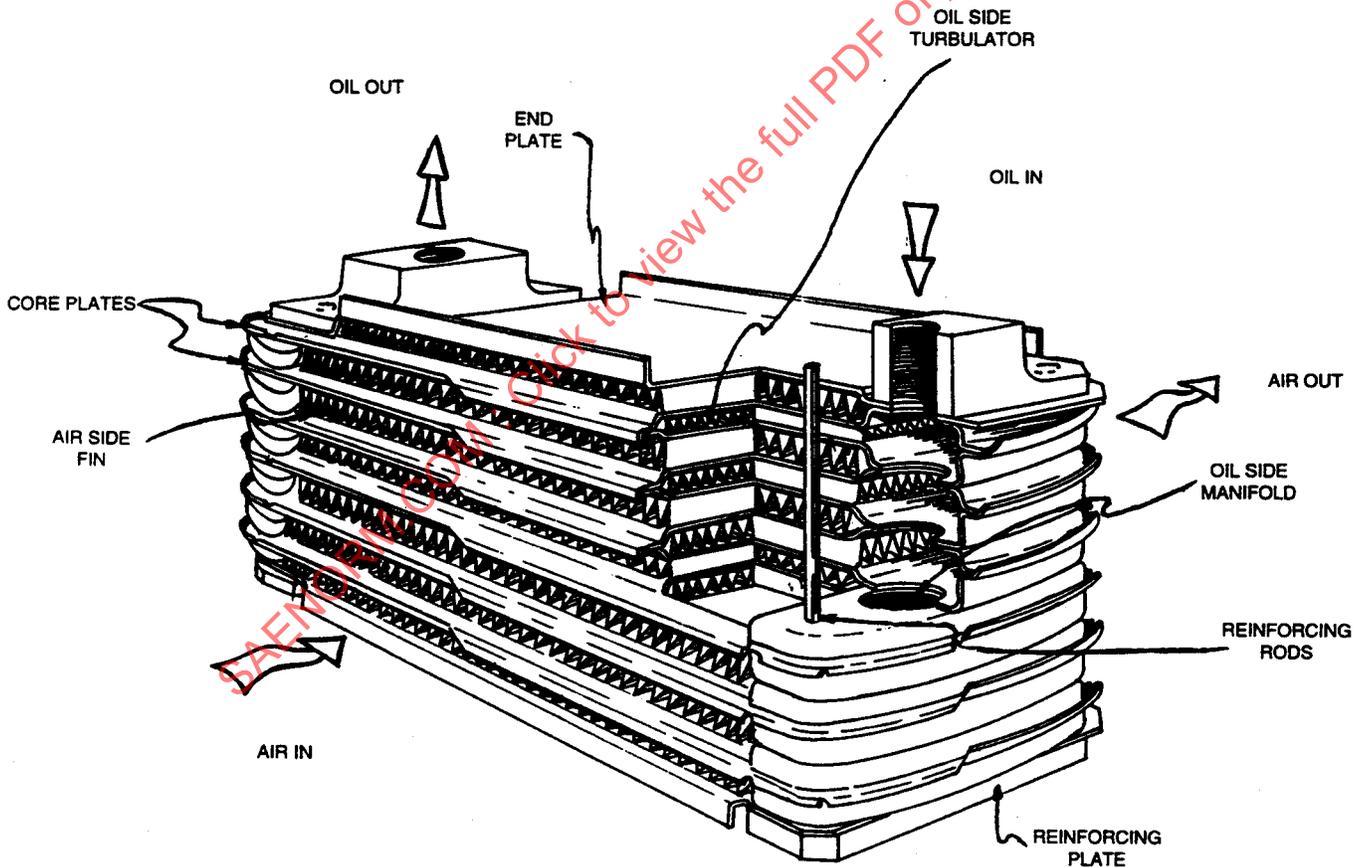


FIGURE 1—PLATE FIN SEPARATOR OIL TO AIR COOLER

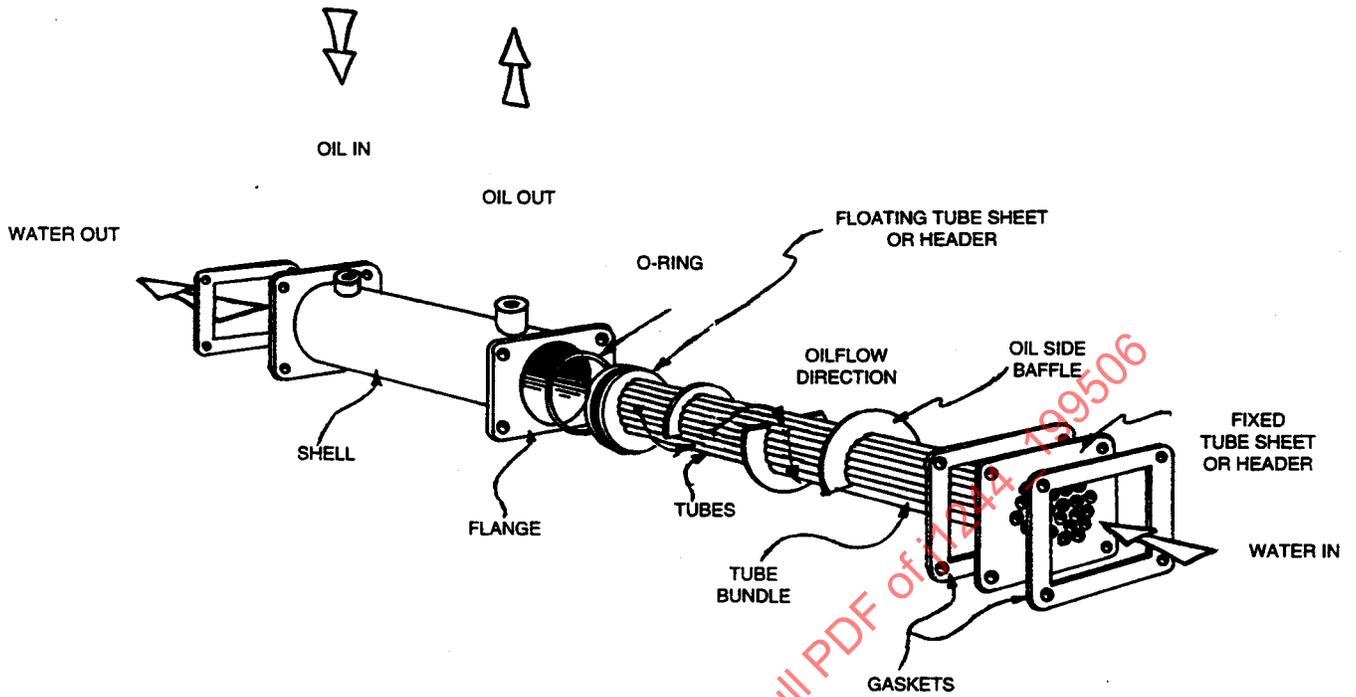


FIGURE 2—SHELL AND TUBE REMOVABLE BUNDLE OIL TO WATER COOLER

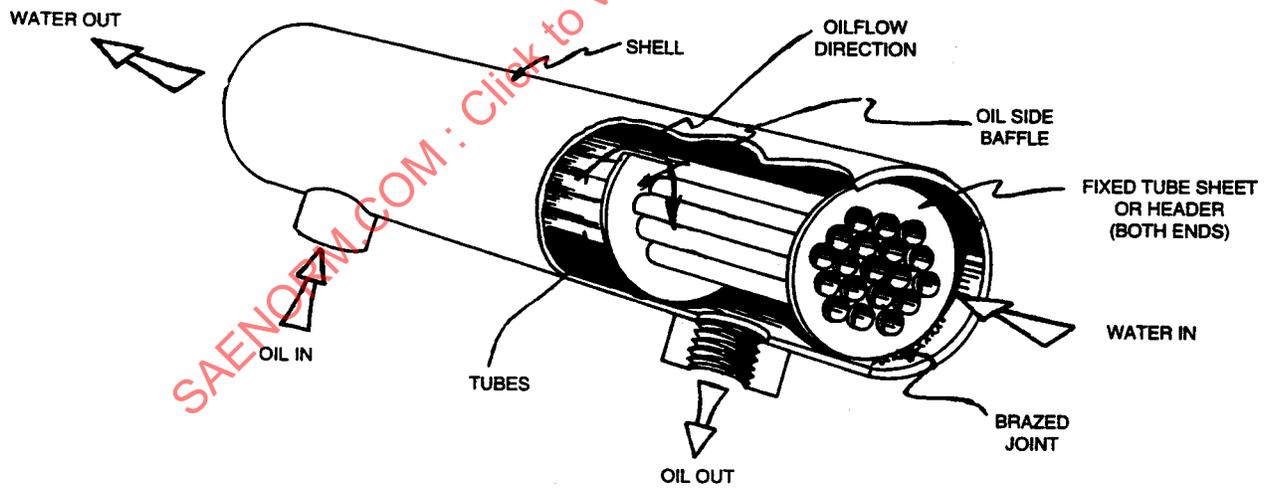


FIGURE 3—SHELL AND TUBE OIL TO WATER COOLER-FIXED BUNDLE

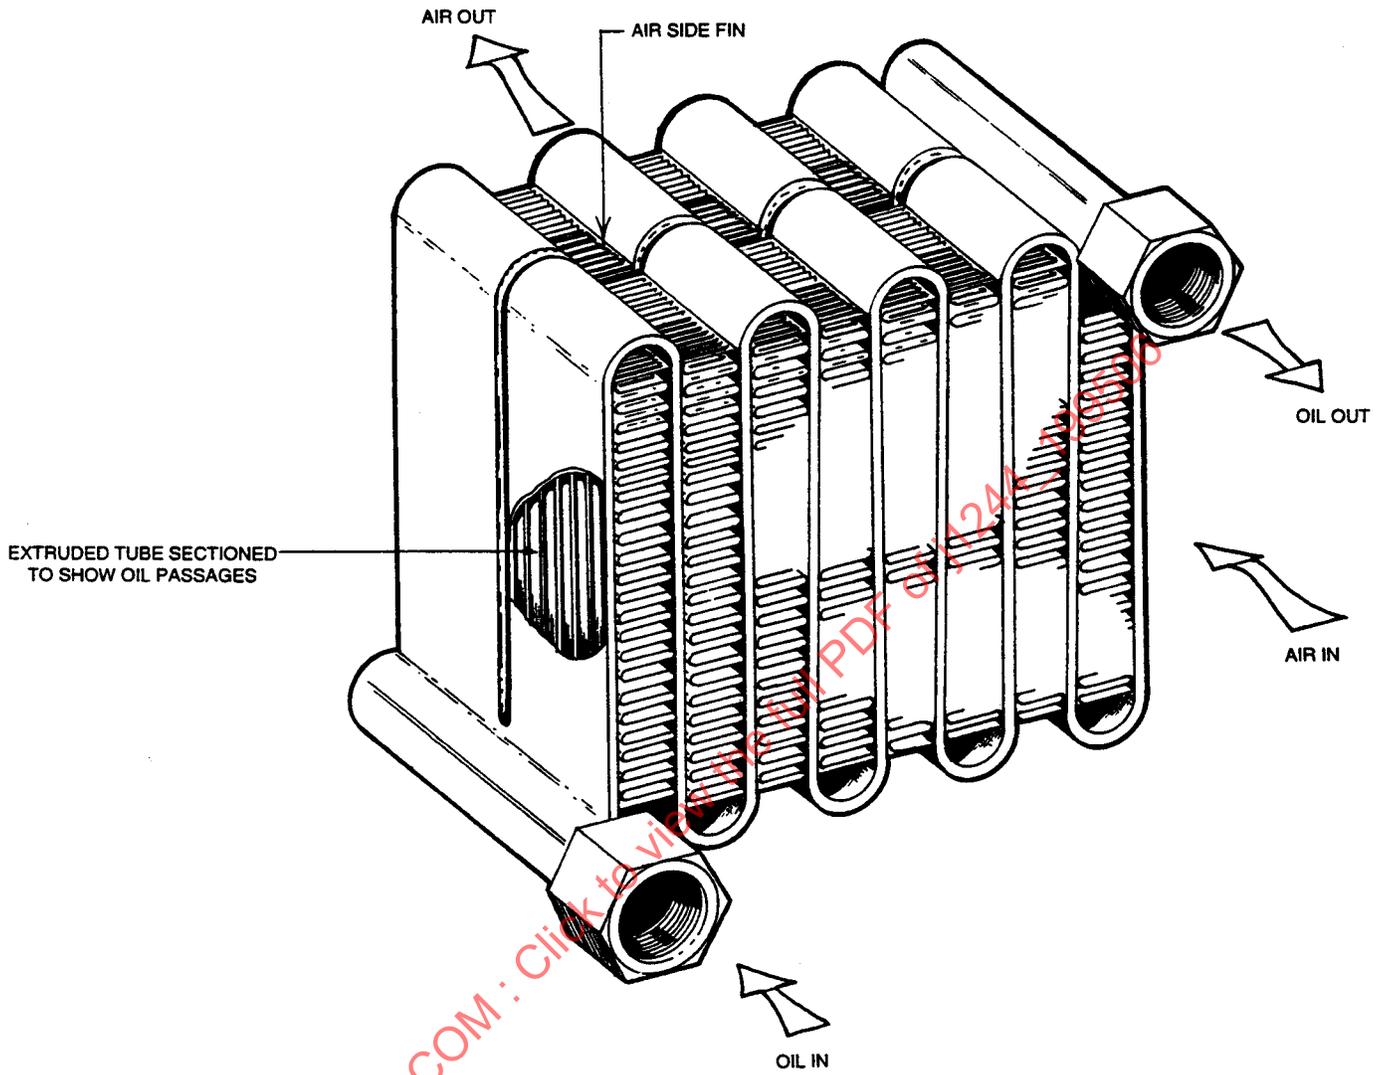


FIGURE 4—SERPENTINE TUBE AND FIN OIL TO AIR COOLER

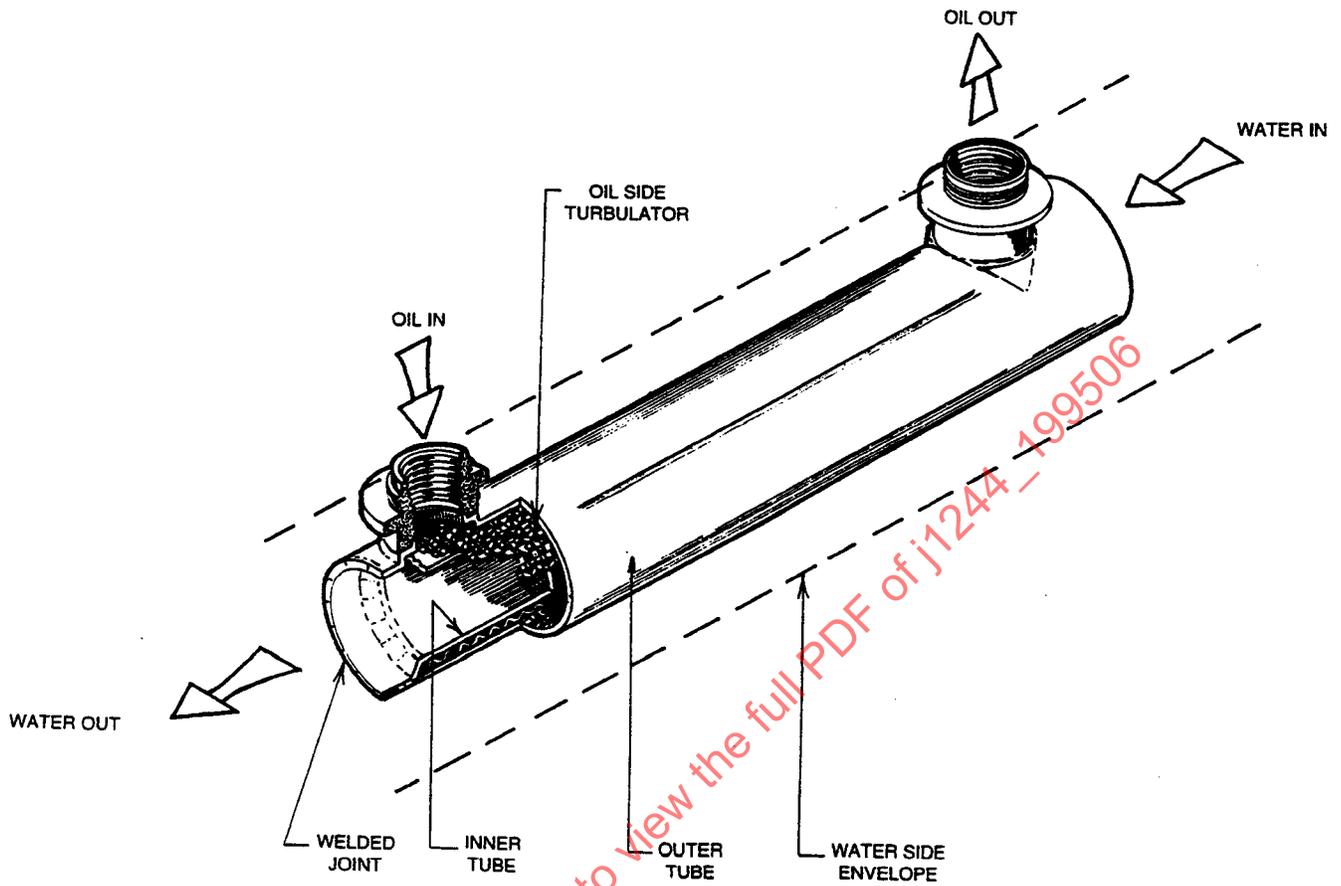


FIGURE 5—CONCENTRIC TUBE OIL TO WATER COOLER

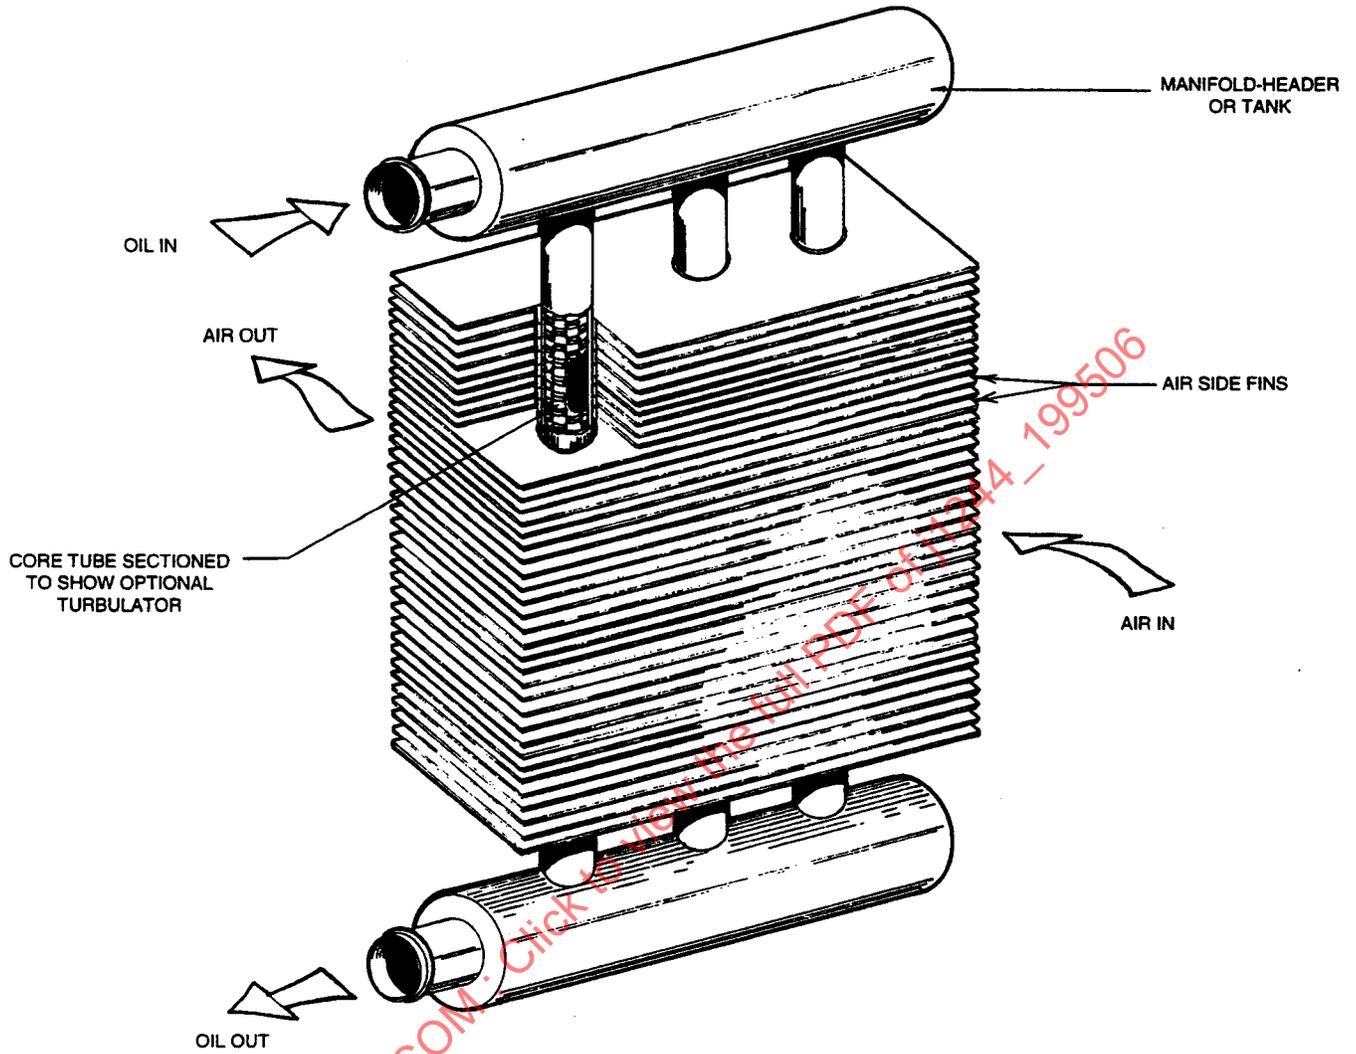


FIGURE 6A—ROUND TUBE AND FIN OIL TO AIR COOLER

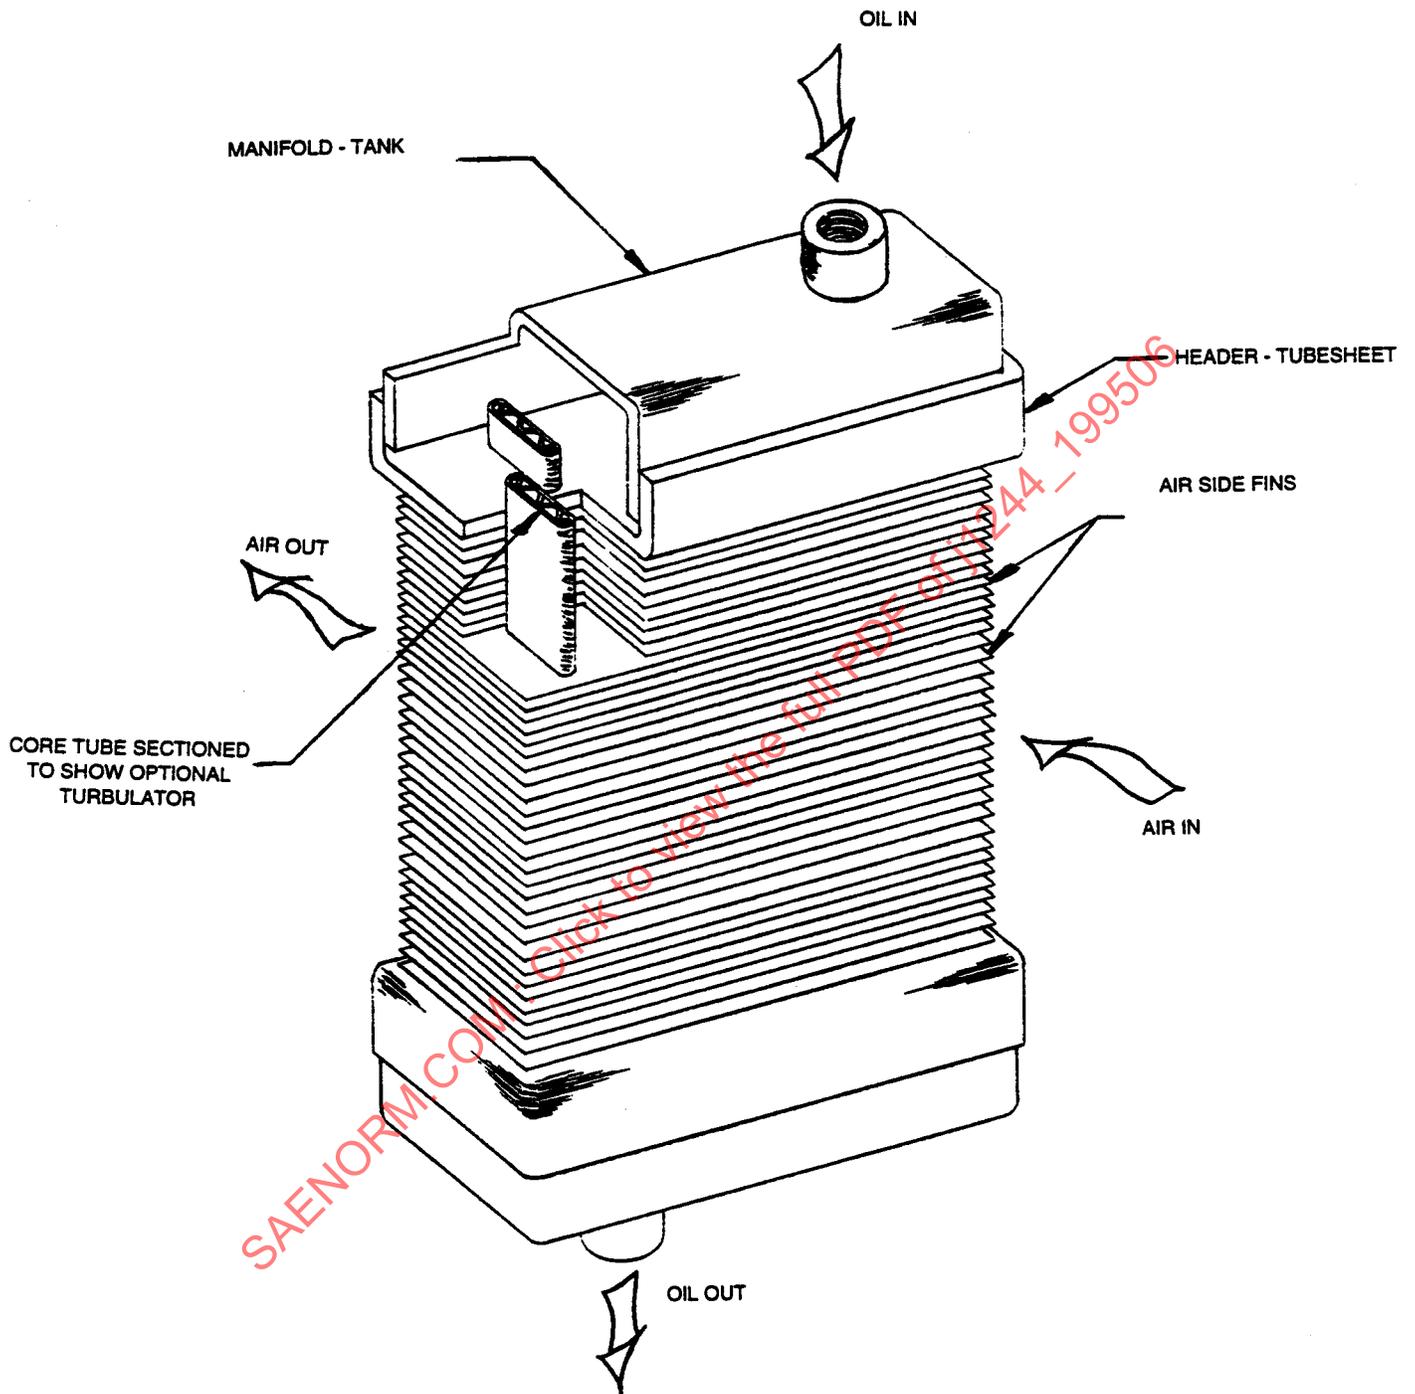


FIGURE 6B—OVAL TUBE AND FIN AIR TO OIL COOLER