

**SAE J1282 OCT84**

**Snowmobile Brake  
Control Systems**

SAE Recommended Practice  
Reaffirmed October 1984

SAENORM.COM : Click to view the full PDF of J1282\_198410

**S. A. E.  
LIBRARY**

an American National Standard

SAENORM.COM : Click to view the full PDF of J1282\_198410

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Copyright 1987 Society of Automotive Engineers, Inc.

SNOWMOBILE BRAKE CONTROL SYSTEMS

1. **SCOPE:** This recommendation is intended to provide the minimum acceptable criteria for snowmobile hand brake control systems. This recommendation is not intended to cover competition vehicles nor is it intended to limit development of new and/or improved technology in controls. Although these recommendations are primarily addressed to hand control systems using an outer flexible conduit with a multiple strand inner cable or hydraulic type brake control system, the basic requirements of freedom of movement, strength, material, etc. will apply to any system.
2. **DEFINITIONS:**
  - 2.1 **Snowmobile:** As defined in SAE J33, Snowmobile Definitions and Nomenclature - General.
  - 2.2 **Brake Control:** A hand-controlled device mounted on the steering control; generally a pivotable lever type (squeeze grip), when actuated will cause the vehicle to decelerate and/or stop the vehicle.
  - 2.3 **Control Line(s):** Rigid and/or flexible tubing used to transmit hydraulic fluid from brake control to brake cylinder.
  - 2.4 **Control Linkage:** A means of transmitting mechanical motion between two or more points.
    - 2.4.1 **Control Cable Assembly:** A linkage consisting of a flexible assembly with an outer housing or conduit and an inner cable, usually multiple stranded; capable of transmitting motion between two points. This assembly is provided with connection means on both ends of housing and cable.

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

- 2.5 Brake Control System: A complete system used to decelerate the vehicle. This includes the brake control, control linkage, or control line, brake assembly, springs, brackets, etc. necessary for operation of the system. Any attachment to the brake control system, such as a warning light switch, safety switch, etc., shall be considered as part of the system if attachment affects the system's operation.
- 2.6 Right-Right Hand, Left-Left Hand: Designation refers to orientation of the vehicle when the operator is seated in the operator's position, facing forward.
- 2.7 Normal Position: Position of brake control system when not activated.
- 2.8 Shall: Defined in accordance with SAE J1159, paragraph 6.7.4.
- 2.9 Should: Defined in accordance with SAE J1159, paragraph 6.7.4.
3. REQUIREMENTS AND RECOMMENDATIONS:
- 3.1 Requirements: The brake control system shall meet the following minimum performance criteria when tested in accordance with Section 4, Tests, or meet the following design requirements verified by visual inspection:
- 3.1.1 The brake control(s) shall be on the left side of the steering control adjacent to, or at, the left hand position.
- 3.1.2 Lever type brake control shall be positioned so that pivoting the lever toward the steering control shall decelerate or stop the vehicle.
- 3.1.3 Lever, Maximum Extension: Full extension of the brake control lever at the center of action shall not exceed 89.2 mm (3.5 in). The center of action is the mid-point of a line drawn from the top of the lever to its pivot point. The normal extension will be the shortest dimension through the center of action to the outside surfaces of the lever and the handlebar gripping point. (See Fig. 1.)

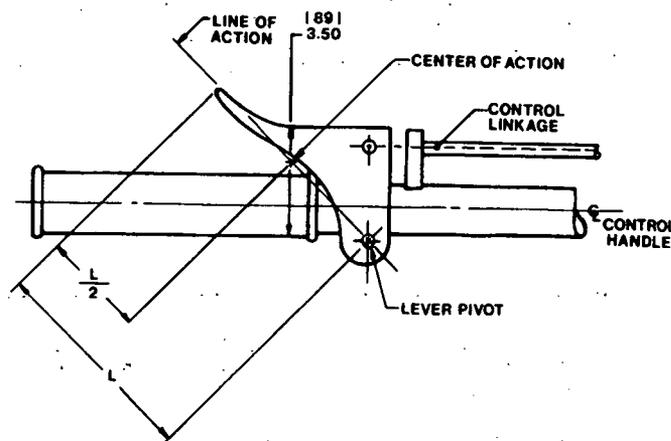


FIG. 1

- 3.1.4 The brake control system shall, when released from any partial or full-braked position, automatically return to the normal position, and the brake shall deactivate within 1 s, except when such brake control system is equipped with a locking device for parking purposes, and the locking device has been activated.
- 3.1.5 The brake control system's performance shall not be adversely affected by climatic conditions during vehicle operation.
- 3.1.6 The brake control system shall be protected from areas which would cause the system's temperature to exceed the temperature limit of the material used.
- 3.1.7 The brake control system shall be protected so that with all guards and shrouds in place, it cannot be inadvertently pulled or snagged in a manner that would activate the brake.
- 3.1.8 Motion of any part of the vehicle, such as the steering control, shall not cause activation, prevent activation, or jam the brake control system.
- 3.2 Recommendations: The following design recommendations should improve the performance and safety of a brake control system:
- 3.2.1 The control system should be routed to avoid entrapment of moisture, and to minimize accidental damage caused by contact with moving parts within the machine.
- 3.2.2 Control cable assembly, when used, should be routed with bend radii as large as practical. Where small radii are necessary, adequate strain relief protection should be provided to insure that the conduit will not kink.
- 3.2.3 The adequacy of the brake control system should be verified by field testing.
4. TESTS:
- 4.1 General Requirements:
- 4.1.1 A minimum of two samples of each type of brake control system are to be tested.
- 4.1.2 The brake control system used throughout the following testing shall be identical to those to be used in vehicle production.
- 4.1.3 All brake control system tests shall be conducted on a vehicle with production routing or on a suitable fixture that duplicates the location of components and routing.
- 4.1.4 Room temperature is defined as being in the range of 60-80°F (15-27°C).
- 4.1.5 The engine does not have to operate unless otherwise noted.

4.1.6 Components may be lubricated at time of initial assembly if specified on production assembly specification. After tests have started, lubrication of any component of the brake control system other than components which receive lubrication during normal maintenance operations or which are specified in vehicle service instructions shall not be allowed.

4.1.7 Tests shall be run in the following sequence:

#### 4.2 System Performance Test:

4.2.1 Scope: To determine the adequacy of the performance of the brake control system.

4.2.2 Requirements: The brake control system shall meet the requirements of SAE J44.

#### 4.3 Strength Test:

4.3.1 Scope: Determine the adequacy of the brake control system to withstand panic forces which may be imposed by the operator.

4.3.2 Requirements: The brake control system shall withstand a minimum force of 160 lb (75.6 kg). (See Fig. 2.) This first test is to be conducted at room temperature; subsequent tests will be required in paragraphs 4.4, 4.5, and 4.6.

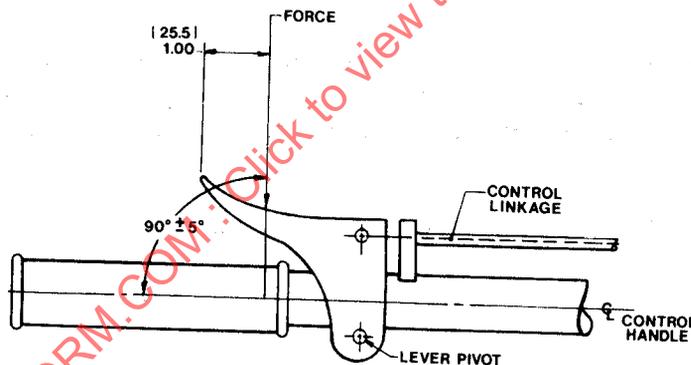


FIG. 2

#### 4.4 System High Temperature Test:

4.4.1 Scope: To determine the effect of elevated temperature and wear on operation of the brake control system.

#### 4.4.2 Test Procedure:

- 4.4.2.1 Conduct the test at a temperature of 120°F (49°C) minimum. If, however, a portion of the brake control system is exposed to a higher temperature in service, then at least this portion of the brake control system shall be tested at this higher temperature. (Refer to paragraph 4.4.2.2.)
- 4.4.2.2 Determine the maximum temperature to which the brake control system is exposed when the snowmobile has operated for a minimum of 30 min under load at an ambient temperature of at least 50°F (10°C) and use this temperature to conduct the paragraph 4.4.2.3 test. If a minimum ambient of 50°F (10°C) cannot be obtained, subtract the ambient temperature from 50°F (10°C) and add this difference to the maximum under-hood temperature to which the brake control system is exposed at the lower ambient. Use this temperature to conduct the paragraph 4.4.2.3 test.
- 4.4.2.3 Cycle the brake control system through design operating range with a minimum actuation force 50% higher than that required to meet the requirement of SAE J45 (paragraph 6.3, Effectiveness Test), at a rate not to exceed 60 cycles/min for 25 000 cycles. Cycles may be used toward the 100 000 cycles of the paragraph 4.5 test.
- 4.4.2.4 The brake control system shall be subjected to paragraph 4.3, Strength Test, while remaining at temperature, per paragraph 4.4.2.1 or 4.4.2.2.
- 4.4.3 Test Acceptance: The brake control system shall remain fully functional throughout and upon completion of testing.

#### 4.5 System Cycle Test:

- 4.5.1 Scope: Determine the effect of wear of the brake control system on control operations.
- 4.5.2 Procedure:
- 4.5.2.1 Conduct tests at room temperature.
- 4.5.2.2 The brake control system shall be cycled through the operating range (control linkage travel) with an actuation force 50% higher than that required to meet the requirement of SAE J45 (paragraph 6.3, Effectiveness Test), at a rate not to exceed 60 cycles/min for a minimum of 100 000 cycles.
- 4.5.2.3 Cycles accumulated in paragraph 4.4, System High Temperature Test, can be credited toward the 100 000 cycles required for this test.
- 4.5.2.4 Subject brake control system to paragraph 4.3, Strength Test.
- 4.5.3 Test Acceptance:
- 4.5.3.1 The brake control system shall remain fully functional throughout and upon completion of testing.