



<b>SURFACE VEHICLE RECOMMENDED PRACTICE</b>	<b>J1334™</b>	<b>SEP2015</b>
	Issued	1987-06
	Revised	2015-09
Superseding J1334 OCT2003		
Hydraulic Cylinder Integrity Test		

## RATIONALE

This Standard is revised to clarify definitions and incorporate ISO 4406 as reference for fluid cleanliness.

### 1. SCOPE

Applies to hydraulic cylinders which are components of Off-Road Work Machines defined in SAE J1116.

#### 1.1 Purpose

To provide a laboratory method for determining the structural integrity of a double acting hydraulic cylinder. General seal performance is monitored during the cylinder cycle test.

### 2. REFERENCES

#### 2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

##### 2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), [www.sae.org](http://www.sae.org).

SAE J1116	Categories of Off-Road Self-Propelled Work Machines
SAE J1176	External Leakage Classifications for Hydraulic Systems
SAE J1276	Standardized Fluid for Hydraulic Component Tests
SAE J1336	Hydraulic Cylinder Leakage Test

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

**TO PLACE A DOCUMENT ORDER:** Tel: 877-606-7323 (inside USA and Canada)  
Tel: +1 724-776-4970 (outside USA)  
Fax: 724-776-0790  
Email: [CustomerService@sae.org](mailto:CustomerService@sae.org)  
<http://www.sae.org>

SAE WEB ADDRESS:

**SAE values your input. To provide feedback  
on this Technical Report, please visit  
[http://www.sae.org/technical/standards/J1334\\_201509](http://www.sae.org/technical/standards/J1334_201509)**

## 2.1.2 ISO Publications

Available from American National Standards Institute, 25 West 43rd Street, New York, NY 10036-8002, Tel: 212-642-4900, [www.ansi.org](http://www.ansi.org).

ISO 4406 Hydraulic Fluid Power - Fluids - Method for coding the level of contamination by solid particles

## 3. DEFINITIONS

### 3.1 AVERAGE CYLINDER ROD VELOCITY

The sum of twice the stroke length divided by the sum of the movement time for the rod to extend and retract.

### 3.2 CYCLE

The movement of the piston and rod from its starting point and return to its original position, for a specified test stroke length

### 3.3 CYCLE RATE

The number of cycles per unit of time.

### 3.4 PROOF TEST PRESSURE

The maximum pressure which can be applied that does not cause any permanent set or deformation.

### 3.5 RATED PRESSURE

The continuous duty operating pressure specified by the manufacturer.

### 3.6 ROD TEMPERATURE

The temperature of the rod surface during or immediately after cycling. Record location and method of sampling.

### 3.7 SIDE LOAD

A force which is in a direction, unless otherwise specified, perpendicular to the axial loading of the cylinder to simulate loading due to external forces on the cylinder as defined by the user.

### 3.8 SPECIFIED FUNCTIONAL LIFE

The number of cycles a cylinder can withstand and continue to function as specified.

### 3.9 TEST STROKE LENGTH

The total distance traveled by the piston and rod in one direction.

### 3.10 CYLINDER FRICTION

Internal frictional force measured as the amount of pressure necessary to move the piston with all external (either mechanical or hydraulic) forces removed or in balance.

### 3.11 SPECIFIED COLUMN LOAD

Maximum compressive load as specified by the test requester, including all appropriate Safety Factors required for the intended application.

#### 4. TESTING CONDITIONS

##### 4.1 Accuracy of Measurement

The accuracy of measurements, unless otherwise stated, shall be;  
Temperature  $\pm 3$  °C, Pressure  $\pm 2\%$ , Leakage  $\pm 2\%$ , Time  $\pm 2\%$ , and Length  $\pm 2\%$ .

##### 4.2 Test Fluid

The test fluid shall be according to SAE J1276 unless otherwise specified.

##### 4.3 Test Pressure

The operational test pressure shall be the manufacturer's rated pressure and measured at the cylinder work ports. A 10% transient overshoot is permissible unless another amount is agreed upon by the user.

##### 4.4 Pressure Rise Rate

The pressure rise rate shall be a minimum of 150 MPa per second.

##### 4.5 Contamination Level

The test system shall have a contamination level not to exceed ISO 4406 Code -/17/14.

##### 4.6 Test Stroke Length

The length of stroke for the cycle test procedure shall be equal to at least 15% of the maximum stroke length of the hydraulic cylinder.

##### 4.7 Cycle Rate

The cycle rate shall be as specified by the manufacturer unless to be agreed upon between supplier and manufacturer based on cylinder rating.

##### 4.8 Specified Functional Life Rating

The specified functional life rating as specified by the manufacturer.

##### 4.9 Proof Test Pressure


The proof test pressure shall be as specified by the manufacturer or 200% of the rated pressure if none is specified.

#### 5. TEST EQUIPMENT

Use a suitable test fixture, for example, an oscillating beam type, a conventional in-line beam type, or a similar fixture, in which the test cylinder can be loaded and driven in either direction under both static and dynamic conditions.

## 6. BUCKLING TEST (SEE FIGURE 1)

The test cylinder shall be specially prepared to represent a working unit, (e.g., while fully extended and supported on pins at end joints). Apply the specified column load to the extended piston rod. The load shall be gradually applied and radial deflection should be measured at 20% intervals of the specified column load requirements.

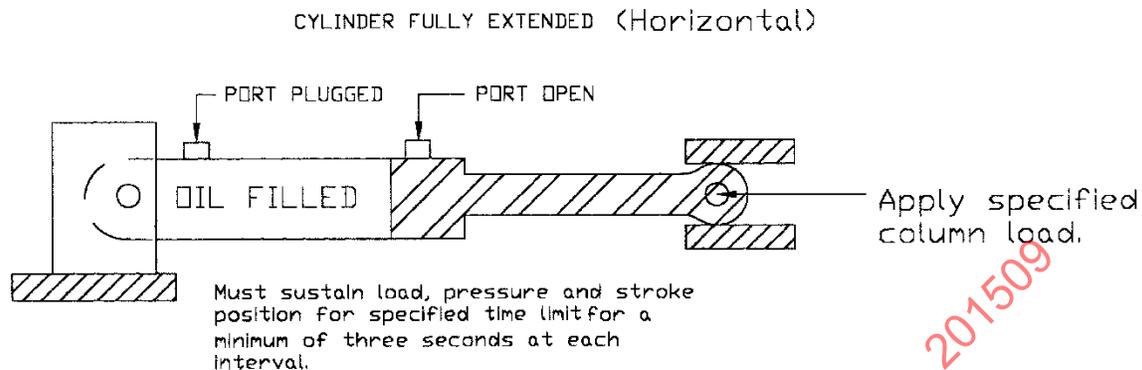


### SPECIMEN PREPARATION PRIOR TO TEST


Mount cylinder as intended for its specific application. Measure radial deflection at midpoint of supports at full extension as a function of applied force. Measure at 20% intervals of specified column load requirements.

**Figure 1 - Buckling test**

## 7. CYLINDER FRICTION TEST (SEE FIGURE 2)

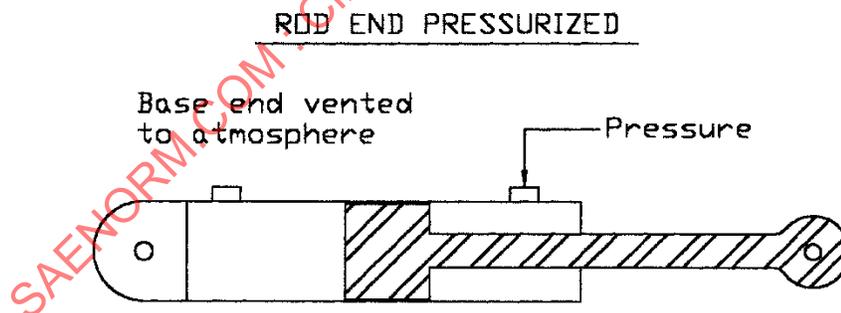

**Figure 2A - Cylinder friction test  
rod end pressurized**

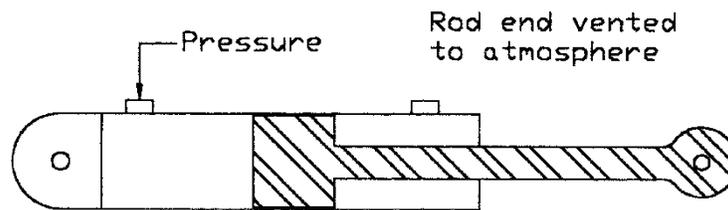
BASE END PRESSURIZED

**Figure 2B - Cylinder friction test  
base end pressurized**

- 7.1 Fill both sides of the cylinder with hydraulic fluid and vent the base end to atmosphere. Conduct the test at ambient temperature.
- 7.2 Position the piston at the midpoint of the cylinder under test.
- 7.3 Apply increasing pressure to the rod end of the cylinder under test. (See Figure 2A.)
- 7.4 Record on DATA sheet the minimum pressure at which the piston moves and also the pressure required to keep it moving. Record the temperature.
- 7.5 Repeat the previous test for the reverse direction by applying pressure to the base end and venting the rod end to atmosphere. (See Figure 2B.)
- 7.6 Test may be conducted at other stroke positions. Record position and pressure.

SAENORM.COM : Click to view the full PDF of J1334\_201509


## 8. CYCLE TEST PROCEDURE (SEE FIGURE 3)

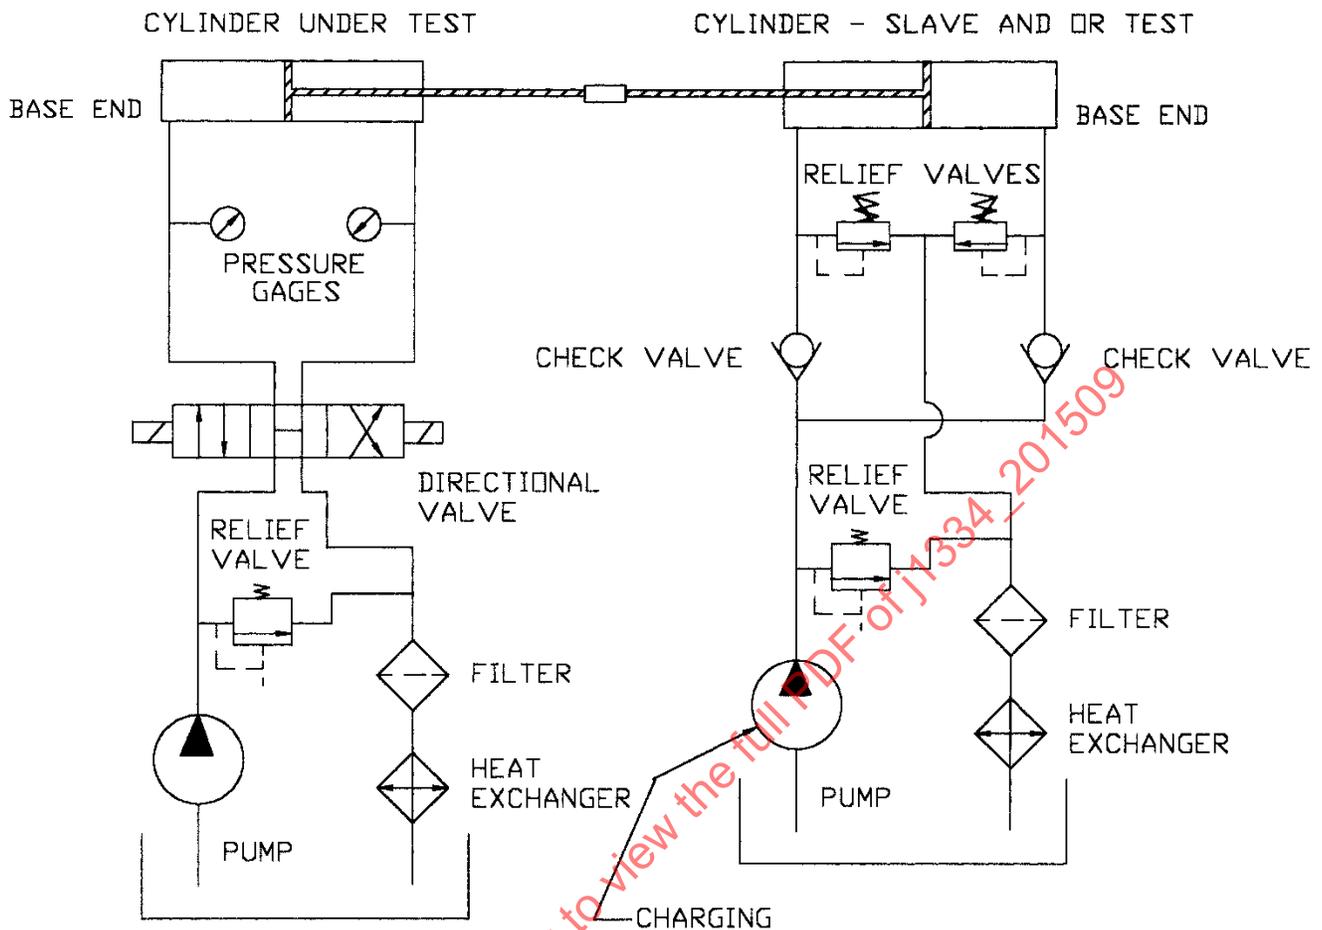

**Figure 3 - Typical test setup for endurance testing**

- 8.1 Install test cylinder in cycle test stand.
- 8.2 Connect test cylinder to a fluid power source and cycle maximum stroke to displace the trapped air.
- 8.3 Fully extend the cylinder rod and pressurize the cap port to the specified proof pressure. Hold one minute minimum. (For initial startup only.)
- 8.4 Fully retract the cylinder rod and pressurize the rod end port to the specified proof pressure. Hold one minute minimum. (For initial start up only.)
- 8.5 Position the cylinder rod to cycle within  $\pm 20\%$  of the middle section of the stroke.
- 8.6 Cycle the test cylinder for one hundred cycles at rated pressure to simulate a Break-in period.
- 8.7 Conduct leakage test in accordance with SAE J1336 on both internal and external seals.
- 8.8 Cycle the cylinder against the external load at the specified operational test pressure and cycle rate. Fluid test temperature, measured in the supply line, shall be 50 °C or 110 °C, or as agreed between the user and supplier. Multiple tests may be performed, each at a different temperature. If more than one temperature is used, the temperatures shall be alternated at each leakage check point as specified in 8.9.

- 8.9 Continue the specified cycling for 100% of the duty cycles desired, or until malfunction occurs. Measure drift rates of piston seal leakage every 50,000 cycles or at agreed upon intervals in accordance with SAE J1336, Section 6. Obtain accumulated rod seal leakage in accordance with SAE J1336, Section 7, and record during cycle test and calculate  $K_c$ , Dynamic Leakage Coefficient. Classification of leakage shall be in accordance with SAE J1176.
- 8.10 No modifications or repairs shall be made during the operational test.
- 8.11 Pin joints shall be greased when necessary.
9. IMPULSE ENDURANCE TEST (SEE FIGURE 4)

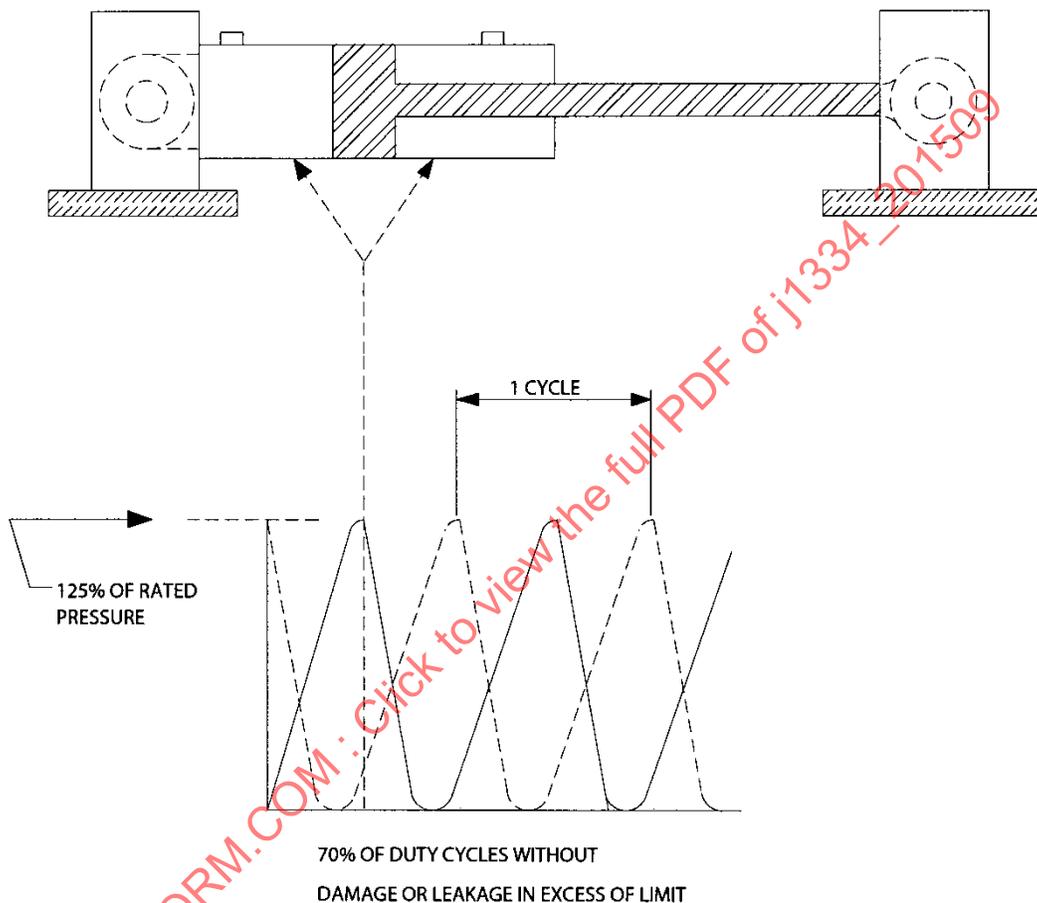

- 9.1 Position and mechanically hold cylinder at approximately mid-stroke extension and pressure cycle alternately the base end and the rod end from a minimum pressure to a pressure limited to 125% of the rated pressure (each direction) of the cylinder assembly at a minimum rate of 60 pressure cycles per minute. Pressure cycle test cylinder for 70% of the total number of duty cycles specified. Note the pressure in the cylinder should return to zero, or no more than 10% of test pressure, before pressurizing the opposite side on every cycle.

## 10. PRESENTATION OF RESULTS

- 10.1 Record general data shown in Appendix A. (See copy.)
- 10.2 Record cycles, fluid temperature, and rod temperature.
- 10.3 Record drift rate in accordance with SAE J1336, Section 6.
- 10.4 Record external leakage during cycling portion of test in accordance with SAE J1336, Section 7.