

	SURFACE VEHICLE RECOMMENDED PRACTICE	 J1339 SEP2009
		Issued 1981-07 Revised 2009-09
		Superseding J1339 AUG2002
Test Method for Measuring Performance of Engine Cooling Fans		

RATIONALE

This document has been updated to clarify a few confusing points and to make corrections to spelling and grammar. There has also been a correction made to Equation 6 to correct a typographical error.

1. SCOPE

This SAE Recommended Practice is intended for use in testing and evaluating the approximate performance of engine cooling fans. This performance would include flow, pressure, and power. This flow and pressure information is used to estimate the engine cooling performance. This power consumption is used to estimate net engine power per SAE J1349. The procedure also provides a general description of equipment necessary to measure the approximate fan performance.

The test conditions in the procedure generally will not match those of the installation for which cooling and fuel consumption information is desired. The performance of a given fan depends on the geometric details of the installation, including the shroud and its clearance. These details should be duplicated in the test setup if accurate performance measurement is expected. The performance at a given air density and speed also depend on the volumetric flow rate, or the pressure rise across the fan, since these two parameters are mutually dependent. These parameters depend on the pressure drop across the radiator core and the ram pressure due to vehicle motion. For these reasons, the test procedure should be recognized as providing only an approximate measure of installed fan performance.

Although the test procedure is based on running the fan with a motoring dynamometer, the actual installation can be used as a test fixture if an accurate torque meter is available. In this case, the same qualifications discussed apply. Finally, for the effect of a fan clutch in reducing fan use and power consumption, which is not a part of this procedure, refer to SAE J1342.

1.1 Purpose

This document provides a recommended test procedure for measuring and comparing the performance of fans over a range of pressure and speeds. The resulting performance data are intended for predicting the cooling performance and fuel consumption of engines using these fans, and in comparing one fan versus another.

2. REFERENCES

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated the latest issue of SAE publications shall apply.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2009 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: **Tel:** 877-606-7323 (inside USA and Canada)
 Tel: 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org

SAE WEB ADDRESS:

<http://www.sae.org>

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J1342 Test Method for Determining Power Consumption of Engine Cooling Fan Drive Systems

SAE J1349 Engine Power Test Code—Spark Ignition and Compression Ignition—Net Power Rating

2.1.2 ANSI Publication

Available from ANSI, 25 West 43rd Street, New York, NY 10036-8002, Tel: 212-642-4900, www.ansi.org.

ANSI/AMCA Standard 210-07 ANSI/ASHRAE Standard 51-2007 American National Standard “Laboratory Methods of Testing Fans for Aerodynamic Performance Rating”

3. TEST PROCEDURE

3.1 Equipment and Facilities

3.1.1 A calibrated motoring dynamometer or drive motor having speed and torque capacity to suit the intended fan characteristic measurement, a drive shaft and mounting provision for the fan or fan clutch, and a calibrated torque meter.

3.1.2 Structure with minimum length, width, and height of 200% of the fan diameter to support a sharp-edge orifice (or other fan shroud), which includes a suitable plenum chamber. A calibrated flow measurement orifice or nozzle should be coupled to this structure. A separate belt drive using an auxiliary power source can facilitate power measurement. See Figure 1.

3.1.3 A boost fan and/or shutters to vary the plenum pressure.

3.1.4 A calibrated tachometer.

3.1.5 Equipment necessary for measurement of air temperature, barometric pressure, the pressure across the flow measurement orifice, and the pressure inside the plenum chamber. For additional accuracy, ambient air humidity during the airflow test can be included in the data acquisition and calculations. See the most current version of AMCA 210 for additional information.

3.1.6 The ANSI/AMCA Standard 210-07 ANSI/ASHRAE Standard 51-2007 “Laboratory Methods of Testing Fans for Aerodynamic Performance Rating” is the American National Standard. Although it is primarily for fans with integral housings, its guidelines are applicable for non-ducted fan performance and test apparatus.

3.2 Test Conditions

3.2.1 Sharp Edge Orifice Test Conditions

The fan is mounted within a sharp-edged orifice that is typically 20 mm larger than the fan diameter. This type of test is also known as a knife edge or flat plate airflow test. The fan is mounted such that 50% of its projected width penetrates the orifice. This type of test is useful for generating general information on fan performance. Some older fan performance data was generated using a sharp edge orifice 0.75 inches larger than the fan diameter.

3.2.2 Application Specific Test Conditions

Mount the fan in the shroud intended for the application at the tip clearance and insertion planned for the application and/or with any components used in the application up to and including the complete application or vehicle. This type of test is useful for generating application specific information on fan performance.

3.2.3 Best Penetration Fan Performance Test Conditions

Mount the fan in a flat plate shroud, or the shroud intended for the application, and adjust the insertion to obtain maximum airflow at each data point.

3.2.4 Specify which test conditions were used on the fan test report, plots, and /or tabulated data.

3.3 Test Procedures

Operate the test fan over a range of speeds representative of the intended use. Select sufficient discrete speeds to establish performance for the speed range. At each discrete test speed vary the plenum pressure across the pressure operating range of the fan in the installation. Usually a minimum of 10 discrete pressure points from zero to maximum pressure would be recorded at each speed. Measure torque, plenum pressure, and the flow nozzle pressure differential at each point. Measure and record laboratory ambient temperature and atmospheric pressure for calculation of air density. Calculate the fan flow, pressure, and power using the formulas of 4.2.

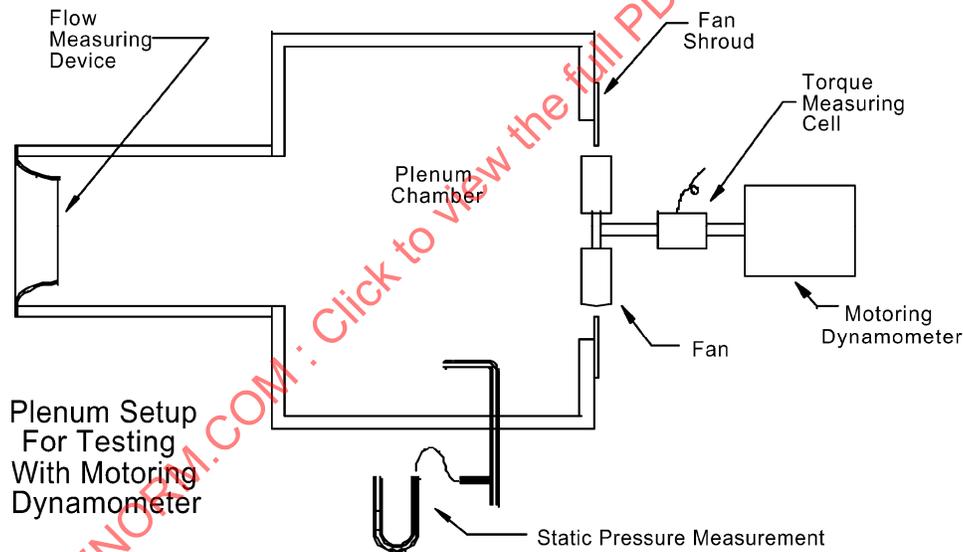


FIGURE 1 - FAN PERFORMANCE TEST SET UP

4. COMPUTATIONS AND RESULTS

4.1 Definition of Symbols

See Table 1.

TABLE 1 - DEFINITION OF SYMBOLS

Symbol	Definition	Units SI	Units English
A	Absolute temp. conversion factor	273 °C	460 °F
B	Barometric pressure	kPa	in-Hg
D	Air density	kg/m ³	lbm/ft ³
t	Ambient temperature	°C	°F
P	Fan power	kW	hp
N	Fan speed	r/min	r/min
T	Fan torque	N-m	lbf-ft
Q	Airflow	m ³ /sec	ft ³ /min
Ps	Static pressure	kPa	in-H ₂ O
Pd	Nozzle pressure (Delta P)	kPa	in-H ₂ O
Pp	Plenum pressure	kPa	in-H ₂ O
K	Density conversion factor (dry air)	$\frac{3.487 \text{ kg}^\circ\text{C}}{\text{m}^3 \text{ kPa}}$	$\frac{1.325 \text{ lbm}^\circ\text{F}}{\text{ft}^3 \text{ in Hg}}$
X	Power conversion factor	$\frac{9549 \text{ N-m r/min}}{\text{kW}}$	$\frac{5252 \text{ lbf-ft r/min}}{\text{hp}}$
Dsa	Standard air density	1.20 kg/m ³	0.075 lbm/ft ³
k _f	Flow conversion constant	35.0	5.97
k _n	Nozzle flow coefficient	Function of nozzle geometry	
d _n	Nozzle diameter	meters	inches
Subscripts			
c	Corrected to standard air density		

4.2 Calculations

4.2.1 Air Density

$$D = KB / (t + A) \quad (\text{Eq. 1})$$

4.2.2 Air Density Correction Factor

$$C = Dsa / D \quad (\text{Eq. 2})$$

4.2.3 Fan Power

$$P = NT / X \quad (\text{Eq. 3})$$

4.2.4 Corrected Fan Power

$$P_c = PC \quad (\text{Eq. 4})$$