

	SURFACE VEHICLE RECOMMENDED PRACTICE	SAE	J1405 MAY2012
		Issued 1979-01 Revised 2012-05	
		Superseding J1405 NOV2005	
Optional Test Procedures for Hydraulic Hose Assemblies			

RATIONALE

Document was reviewed and there were minor corrections made.

1. SCOPE

The procedures contained in this SAE Recommended Practice have been developed to establish uniform methods for impulse and high temperature circulation testing of hydraulic hose assemblies under special conditions not specified in SAE J343 for SAE J517 hoses. Basic test procedures are to be in accordance with SAE J343 except as modified in this document.

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J343 Test and Test Procedures for SAE 100R Series Hydraulic Hose and Hose Assemblies

SAE J517 Hydraulic Hose

SAE J1176 External Leakage Classifications for Hydraulic Systems

3. OPTION I - COMPARATIVE FLEX IMPULSE PROCEDURE

3.1 Purpose

To generate comparative impulse test data, with and without flexing. This test procedure minimizes impulse test variables to provide comparative data between flexing and nonflexing to determine the effect on the ultimate life of hose. This test is not a requirement for SAE J517.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: +1 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
 SAE WEB ADDRESS: <http://www.sae.org>

**SAE values your input. To provide feedback
 on this Technical Report, please visit
http://www.sae.org/technical/standards/J1405_201205**

3.2 Test Procedure

For optimum validity of comparison, test specimens should be cut from a continuous length of hose with alternate samples along the length designated for flexing and nonflexing impulse test.

Those specimens designated for nonflexing should be tested in accordance with SAE J343. Those specimens designated for flexing are to be made up with free hose length in accordance with the following equation:

$$\text{Free hose length} = 4.142 (\text{minimum bend radius}) + 3.57 (\text{hose O.D.}) \quad (\text{Eq. 1})$$

Performance of the flex-impulse test requires a supplementary rig capable of moving one test manifold in a continuous circular pattern as shown in Figure 1. This manifold is geared so that the center lines of the hose fittings at hose attachment stay parallel at all times. A variable drive is provided, and the number of revolutions per minute are to be controlled to, $36\% \pm 2\%$ of the impulse cycles per minute. This maintains a proportionality between the number of cycles of flexing and impulse and assures that the test specimen is in a different configuration of each succeeding impulse.

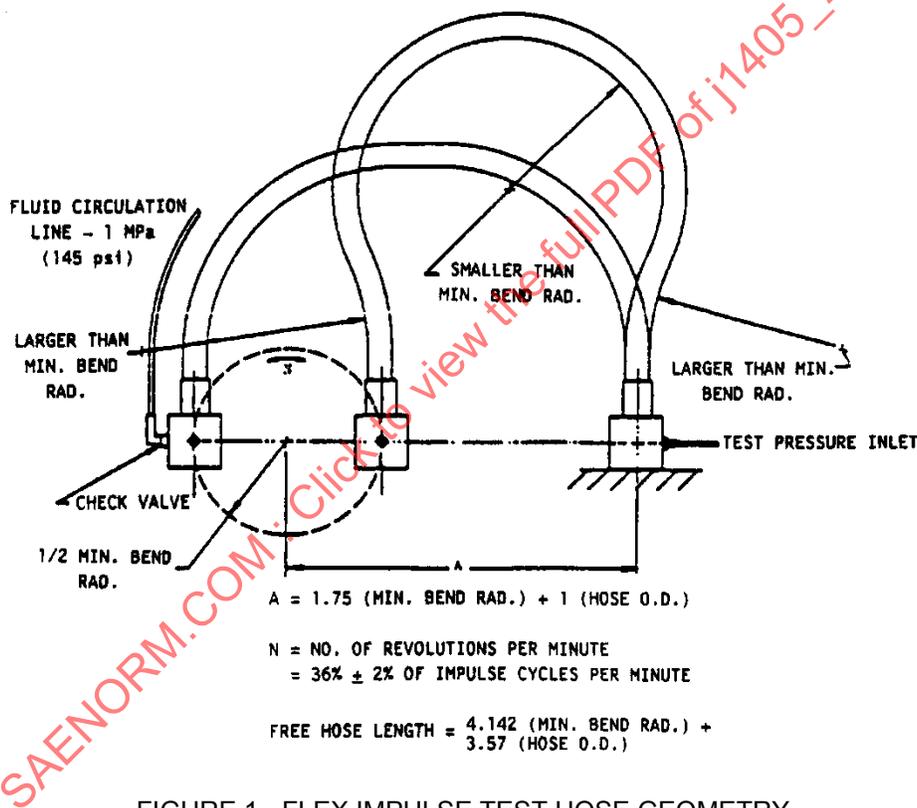


FIGURE 1 - FLEX IMPULSE TEST HOSE GEOMETRY

The vertical centerline of a stationary manifold is positioned a distance "A" from the center of revolution of the revolving manifold. This distance was determined empirically such that the test specimen is subjected to back bending motion near each fitting with the radius of bend at that point being greater than the applicable SAE minimum bend radius. However, when the revolving manifold reaches the position nearest the stationary manifold, the bend radius¹ inside the loop is smaller than the applicable SAE minimum bend radius¹. Distance "A" is calculated with the following equation:

$$1.75 (\text{minimum bend radius}) + 1 (\text{hose O.D.}) \quad (\text{Eq. 2})$$

¹ Violation of the minimum bend radius for this test does not imply that such violation is recommended in applications.

Specimens for flex-impulse testing should be mounted with straight end fittings on the rig as described above using care to avoid imparting twist to the hose. (Angular fittings may be used, provided they are installed in such a position to assure the hose travel and geometry of Figure 1.) A like number of samples, preferably not less than three, should be tested simultaneously and should be run to failure.

To accelerate completion of the test for comparative purposes, a pressure based on actual burst values of the hose is recommended, with flexing and nonflexing specimens to be tested at the same pressure. Suggested procedure is to first determine the average burst strength for the test length of hose and from this calculate the impulse test pressure as 35% of average burst. If this test procedure does not produce failures within the desired range, a higher or lower percentage may be used.

4. OPTION II - FLEX IMPULSE TEST

4.1 Purpose

To establish requirements for impulse testing with the addition of flexing. This is a specialized test which is not a requirement of SAE J517, nor is it specified in SAE J343. It is intended to provide a standard method to flex-impulse hose assemblies when flexing is deemed necessary.

4.2 Test Procedure

Four unaged hose assemblies for flexing are to be made up with free hose length in accordance with the following equation:

$$\text{Free hose length} = 4.142 (\text{minimum bend radius}) + 3.57 (\text{hose O.D.}) \quad (\text{Eq. 3})$$

Performance of the flex-impulse test requires a supplementary rig capable of moving one test manifold in a continuous circular pattern as shown in Figure 1. This manifold is geared so that the center lines of the hose fittings at hose attachment stay parallel at all times. A variable drive is provided, and the number of revolutions per minute are to be controlled to $36\% \pm 2\%$ of the impulse cycles per minute. This maintains a proportionality between the number of cycles of flexing and impulse and assures that the test specimen is in a different configuration on each succeeding impulse.

The vertical centerline of a stationary manifold is positioned a distance "A" from the center of revolution of the revolving manifold. This distance was determined empirically such that the test specimen is subjected to back bending motion near each fitting with the radius of bend at that point being greater than the applicable SAE minimum bend radius. However, when the revolving manifold reaches the position nearest the stationary manifold, the bend radius inside the loop is smaller than the applicable SAE minimum bend radius.² Distance "A" is calculated with the following equation:

$$1.75 (\text{minimum bend radius}) + 1 (\text{hose O.D.}) \quad (\text{Eq. 4})$$

Specimens for flex-impulse testing should be mounted with straight end fittings on the rig as described above using care to avoid imparting twist to the hose. (Angular fittings may be used provided they are installed in such a position to assure the hose travel and geometry of Figure 1.)

4.3 Test Requirements

The hose assemblies shall be tested at the impulse pressures, temperatures and minimum bend radii, for the minimum number of impulse cycles, as specified in SAE J517 for 100R series hoses. Other test parameters, as agreed upon by the supplier and user may be used.

² Violation of the minimum bend radius for this test does not imply that such violation is recommended in applications.

5. OPTION III - COOL DOWN LEAKAGE TEST

5.1 Purpose

To establish requirements for performing a cold start leakage test to be used in conjunction with both flexing or nonflexing impulse tests.

5.2 Test Procedure

The impulse test unit shall be shut down at $40\% \pm 10\%$ and $90\% \pm 10\%$ of the required number of impulse cycles and allowed to cool until the test oil and hose assemblies reach a temperature of $30\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ ($85\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$). Accelerated cool down procedures, i.e., fans, heat exchangers, etc., may be used to speed the cooling process. Check test assemblies to assure they are clean and dry. With oil heater turned off, resume the test and observe and note leakage for 1000 impulse cycles. The acceptable rate of leakage shall be as agreed upon by the supplier and user. (See SAE J1176 for leakage classes.)

After completing the 1000 impulse cycles, turn on oil heater and continue the impulse test.

If leakage is noted during the cool down cycle, notation shall also be made as to whether or not a seal-off was effected as the temperature came back up. Results are applicable only to the specific hose construction and size, hose fitting design and size, and fitting assembly technique.

6. OPTION IV - HIGH TEMPERATURE CIRCULATION TEST

6.1 Purpose

To establish a procedure for testing and evaluation of hose assemblies for use in high temperature systems, using petroleum or synthetic based hydraulic fluids, with a maximum temperature rating of $150\text{ }^{\circ}\text{C}$ ($302\text{ }^{\circ}\text{F}$). Hose performance, dimensions, identification and fitting configurations shall be agreed upon by the supplier and user.

6.2 Test Procedure

A minimum of two hose assemblies having at least 355 mm (14 in) length of free hose between hose fittings shall be mounted on a circulating oil test unit in a straight configuration. The ambient temperature shall be $93\text{ }^{\circ}\text{C} \pm 11\text{ }^{\circ}\text{C}$ ($200\text{ }^{\circ}\text{F} \pm 20\text{ }^{\circ}\text{F}$) and the oil temperature $150\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ ($302\text{ }^{\circ}\text{F} \pm 3.6\text{ }^{\circ}\text{F}$) between inlet and outlet. Oil conforming to MIL-L-2104 or equivalent synthetic oil SAE 10W-30 shall be circulated through the hose assemblies at a pressure between 0.35 and 0.7 MPa (50 to 100 psi). Entrained air in the oil shall be kept to a minimum. Caution shall be exercised so that the hose assemblies do not come into contact with the heating elements and are located to permit good air circulation. The petroleum based test fluid shall be changed every $375\text{ h} \pm 25\text{ h}$, for synthetic fluids use the fluid manufacturers recommendation. Tests are to be run continuously except for oil changes and addition or removal of samples. All shutdown time is to be recorded. After $750\text{ h} \pm 5\text{ h}$, the test assemblies shall be removed, the oil drained, and allowed to cool for a minimum of 4 h. The samples shall then be bent around a mandrel equal to the minimum bend radius of the hose within a time of 8 to 12 s and examined visually for cover cracks. No cracks are permitted. The assemblies shall then be subjected to Proof Test based upon either the hose maximum working pressure or an application pressure agreed to between user and manufacturer. Use SAE J343 for proof test procedures. There shall be no indication of failure or leakage through the hose or at hose fitting juncture. All tests are to be completed within 24 h of removal of the samples from the circulating oil test unit. This shall be considered a destructive test and the samples shall be destroyed.