



## MEASUREMENT OF FUEL EVAPORATIVE EMISSIONS FROM GASOLINE POWERED PASSENGER CARS AND LIGHT TRUCKS USING THE ENCLOSURE TECHNIQUE—SAE J171

### SAE Recommended Practice

Report of Automotive Emissions and Air Pollution Committee approved September 1970.

**Scope**—This SAE Recommended Practice describes a procedure for measuring evaporative emissions from fuel systems of passenger cars and light trucks. Emissions are measured during a sequence of laboratory tests that simulate typical vehicle usage in a metropolitan area during summer months:

1. A 1 hr soak representing one diurnal cycle in which temperature of fuel in the vehicle's tank is raised from 60 to 84 F.
2. A 7 mile run on a chassis dynamometer.
3. A 1 hr hot soak immediately following the 7 mile run.

The method described in this recommended practice for measuring the weight of fuel vapors emitted during the tests differs from that described in SAE J170. SAE J170 employs activated carbon traps connected to the fuel system at locations where vapors are expected to escape. Vapors from these openings are absorbed by the traps, and the gain in weight of the traps represents the fuel evaporative emissions.

The method described in this report employs an enclosure in which the vehicle is placed during the diurnal and hot soak phases of the test. Vapors that escape from all openings in the fuel system—both expected and unexpected—are retained in the enclosure, and the increase in hydrocarbon concentration of the atmosphere in the enclosure represents the evaporative emissions. Emission values measured by the enclosure method may, therefore, be significantly different than those obtained by the trap method, depending on fuel system configuration and component design.

The test sequence and methods for measuring emissions are applicable to vehicles either with or without systems or devices to control fuel evaporative emissions. Although they have been used successfully with a wide range of vehicles equipped with a variety of control devices, they should not be applied indiscriminately to new or unique vehicles or fuel systems. For example, based on experience that temperature excursions of the fuel tank in parked vehicles follow those of ambient air, the test sequence prescribes heating of the fuel tank to simulate a diurnal soak. Any control system designed to alter the relation between fuel and ambient temperatures will not be properly evaluated in the test sequences prescribed.

This SAE Recommended Practice is intended as a guide toward standard practices, but may be subject to frequent change to keep pace with experience and technical advances.

The recommended practice includes the following sections:

1. Definitions
2. Test Fuel
3. Test Facilities and Equipment
4. Measurement Method
5. Preparation of Test Vehicle and Fuel System
6. Test Sequence
7. Information and Data to be Recorded
8. Presentation of Data

**1. Definitions**—The following definitions apply to the terms used:

**1.1 Loaded Vehicle Weight** is the manufacturer's estimated weight of the vehicle in operating condition with all standard equipment, the weight of fuel at nominal tank capacity, the weight of every item of optional equipment which weighs over 3 lb and which is installed on more than 33% of an engine displacement class, plus 300 lb.

**1.2 Evaporative Emissions** are fuel vapors emitted into the atmosphere from the vehicle.

**1.3 Fuel System** means the combination of fuel tank, fuel lines, pump, filter, and vapor return lines, carburetor or injection components, and all fuel system vents and evaporative emission control systems or devices.

**1.4 System or Device** includes any vehicle modifications that control or reduce the amount of fuel vapors emitted from the vehicle.

**1.5 Controlled Vehicle** means a vehicle equipped with systems or devices to reduce the amount of evaporative emissions.

**1.6 Hot Soak Losses** are fuel vapors emitted during a specified period beginning immediately after the engine is turned off.

**1.7 Diurnal Breathing Losses** are fuel vapors emitted as a result of a specified increase in fuel tank temperature in a specified time.

**1.8 Running Losses** are fuel vapors emitted during operation of the vehicle under the specified test schedule.

**1.9 Tank Fuel Volume** is 40% of nominal tank capacity, rounded to the nearest whole U.S. gallon.

**2. Test Fuel**—Although any fuel can be used for the test sequence described, the effectiveness of evaporative emission control systems is usually evaluated with a test fuel representative of that commercially available, or expected to be commercially available, during the summer months. If the purpose of the test is to determine the effects of changes in fuel volatility on evaporative emissions, use of noncommercial fuels may be necessary.

**2.1 Test Fuel Identification**—To properly identify the fuel used, it should be inspected for these properties:

Property	ASTM Test Method
Distillation	D 86
IBP	—
5% Evaporated	—
10%	—
15%	—
20%	—
30%	—
40%	—
50%	—
90%	—
FBP	—
Reid vapor pressure, psi	D 323
Hydrogen-carbon ratio <sup>a</sup>	D 1018

<sup>a</sup>The hydrogen-carbon (H/C) ratio is required for the final calculation of evaporative losses using the enclosure method. The H/C ratio of condensed evaporative emissions will differ from that of the test fuel. If extremely accurate estimates of the amount of emissions are desired, the H/C ratio should be determined separately for condensed diurnal (fuel tank) and hot soak (carburetor) emissions. If routine laboratory accuracy is acceptable ( $\pm 5\%$ ), a single H/C ratio of the IBP to 130 F distillation cut of the fuel can be used for all calculations of emissions by the enclosure method. H/C ratio can alternately be measured by B-ray absorption, which is quick and accurate (see Jacobs, et al., *Anal Chem.*, Vol. 28, March 1956).

A determination of nonreflex batch distillation temperatures may help in understanding the mechanism of carburetor hot soak losses and determination of true vapor pressure may help in understanding the mechanism of fuel tank losses. However, neither of these tests has been standardized by ASTM.

**2.2 Fuel Sampling**—A sample of test fuel for laboratory inspection should be taken from the fuel source at the start of the test. A 1 pt container, precooled to 40 F or less, should be used. It should be bottom filled to overflow and then poured out to 80% capacity. The container should be tightly sealed immediately after filling and stored at 40 F or less until fuel inspection tests are made. Alternate sampling procedures may be substituted, but care must be exercised with any sampling procedure to prevent the loss of volatile constituents from the fuel during either sampling or storage.

**3. Test Facilities and Equipment**—Provisions must be made for controlling the environment of the vehicle, absorbing power, fueling and cooling the vehicle, and heating the fuel tank.

**3.1 Environment**—Appropriate controls should be provided to maintain temperature between 68 and 86 F for the preconditioning soak and evaporative emission tests (76-86 F for the hot soak phase.)

**3.2 Power Absorption**—A chassis dynamometer with power absorption and inertia loading capabilities is required. The dynamometer's power and inertia capacities must be adjustable to absorb road load power at 50 mph and simulate proper vehicle inertia during acceleration.

**3.3 Vehicle Cooling**—A fixed-speed fan is needed to maintain engine cooling and to provide proper fuel tank heating when the vehicle is running on the chassis dynamometer. The fan capacity must be between 5000 and 5600 cfm, and it must have a discharge area of 450 and 500 sq in.

**3.4 Tank Fuel Heating**—An electric heating pad is needed to heat tank fuel during the diurnal soak. This pad should cover 50% or more of the area wetted by the test fuel. A 2000 W heating pad with a variable voltage transformer to regulate heat output should be adequate in most vehicles. Alternate heating methods may be used on vehicles of unusual configuration or if necessary to comply with local laboratory practices. All methods should avoid hot spots in the tank wetted surface which could cause local overheating of the fuel. Heat must not be applied to the vapor in the tank above the liquid fuel. With proper heating of the tank, vapor temperature will not exceed liquid temperature by more than 6 F at completion of the diurnal soak. Thermocouples and a multi-channel, potentiometric-type recorder with 1 deg accuracy and with variable chart speed should be used for monitoring temperatures.

**3.5 Fueling**—Facilities and safeguards must be provided for draining and refilling vehicle fuel tanks. The work area must be well ventilated. Drain and filling connectors and containers must be grounded to the vehicle tank. If tanks have a suitable drain fitting, they may be drained by gravity. If not, they may be pumped dry through the fill pipes. Many tanks are difficult to drain either way, and care should be taken to insure that the tanks are adequately drained. Facilities must be provided to refill vehicle tanks to the specified tank fuel volume with fuel at a temperature such that, at completion of the fill, the fuel temperature in the tank is  $60 \pm 1$  F. Test fuel in storage may require special temperature control to comply with this temperature limit. Fuel cannot be reused for emission tests.

**4. Measurement Method**—The car enclosure method provides for sealing the vehicle in an enclosure during the soak phases of the test. Evaporative emissions are determined from the changes in the hydrocarbon concentrations in the enclosure. This method produces a single measurement of evaporative emissions during a soak, regardless of the number of sources. It can be used to measure evaporative emissions without modifications to the vehicle, and it can also be combined with the trap method to assist in quantitative allocations of emissions to specific sources. It is not applicable to the run phase, and if there is a chance of evaporative emissions occurring during that phase, traps must be used for it. (Refer to SAE J170 for description of the trap method.)

**4.1 Equipment Requirements**—An enclosure with internal dimensions of 10 ft x 20 ft x 8.5 ft high will accommodate vehicles with up to 130 in. wheelbase, and has been found convenient for testing most U.S. passenger cars. The foregoing dimensions may be adjusted to accommodate different size vehicles without significantly affecting the test results. The enclosure door must allow entry of the maximum-size vehicle. Door sealing may be accomplished by a resilient gasket, an inflatable seal, or a pressure sealing zipper if a flexible door is used.

Interior surfaces must be impermeable to hydrocarbons. Permeable materials may be covered with polyvinyl fluoride<sup>1</sup> sheet of approximately 0.006 in. thickness. One wall, or door or ceiling, should be of flexible material such as 0.006 in. polyvinyl fluoride sheet to provide a safety "blow-out" panel, and to allow for minor temperature changes of the contained gas without excessive "breathing."

Walls are a barrier to dissipation of heat and should consequently be of minimum thermal resistance. During the hot soak sequence, the temperature of the enclosure atmosphere rises above external room temperature. Some provision may be necessary for limiting temperature to less than 90 F. Directing the discharge from an internal blower against an enclosure wall may help to control peak temperature. Additional temperature control can be realized by application of air streams to the outside surfaces of the enclosure walls, but this must be done carefully because high velocity may aggravate leaks. Photographs of two enclosures that have been used successfully are shown in Fig. 1.

The enclosure must be equipped with a flame ionization detector (FID) hydrocarbon analyzer<sup>2</sup> capable of measuring hydrocarbon concentrations reliably in the range of 10-3000 ppm carbon.

Fuel gases recommended by the manufacturer of the FID and calibrating gases are required as follows:

- Ultrapure grade zero air
- 50 ppm propane in air (nominal)
- 100 ppm propane in air (nominal)
- 300 ppm propane in air (nominal)
- 1000 ppm propane in air (nominal)

A typical sample train for the analyzer is shown in Fig. 2. The sample should be withdrawn from the enclosure through a tube of 1/4 in. ID, terminating 2 in. inside the wall and located on the geometric center of the wall opposite the door or on one of the sides. The tubing connecting this tube to the analyzer should be of 1/4 in. ID stainless steel or similarly inert material and should be as short as possible.

A blower (portable or fixed) of 1500-5600 cfm capacity is required for purging the enclosure between tests, and an explosion-proof blower of 100-200 cfm capacity is required for mixing the enclosure atmosphere during tests. A thermocouple for monitoring the enclosure temperature should be installed 6 in. below the geometric center of the ceiling.

**4.1.1 SYSTEM CHECKOUT**—The complete enclosure measurement system should be checked initially and periodically for calibration, HC retention (leakage) and self emission. Appendix B gives details.

#### 4.2 Operating Sequence for Vehicle Soak in Enclosure

- 4.2.1 Zero and calibrate gas analyzer.
- 4.2.2 With door open, discharge purge blower into enclosure for several minutes immediately prior to test.
- 4.2.3 Push (or drive) the vehicle into the enclosure and make thermocouple connections. Open all windows and luggage compartments.
- 4.2.4 Start mixing blower and orient it to discharge against a fixed enclosure wall.
- 4.2.5 Close and seal door. Make initial reading of FID analyzer.
- 4.2.6 Read enclosure hydrocarbon concentration, enclosure interior air temperature and vehicle test instrumentation at 5 min intervals

<sup>1</sup>"Tedlar" or equivalent.

<sup>2</sup>A general description of hydrocarbon analyzers is given in the Journal of the Air Pollution Control Association, Vol. 16, December, 1966, p. 697, "Analysis of Exhaust Gas Hydrocarbons—NDIR vs. Flame Ionization," by M. W. Jackson.

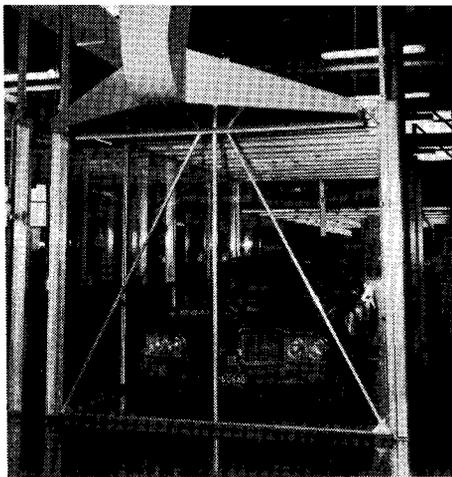
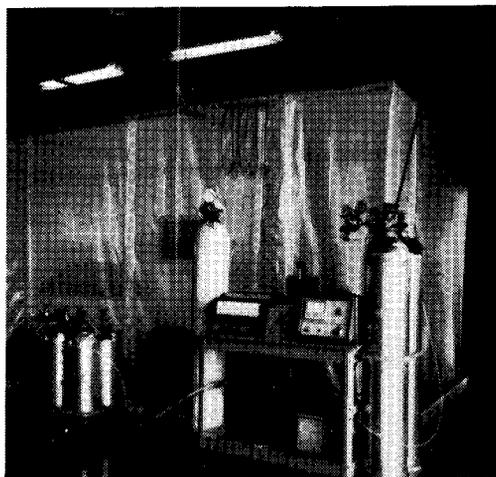


FIG. 1—CAB ENCLOSURE

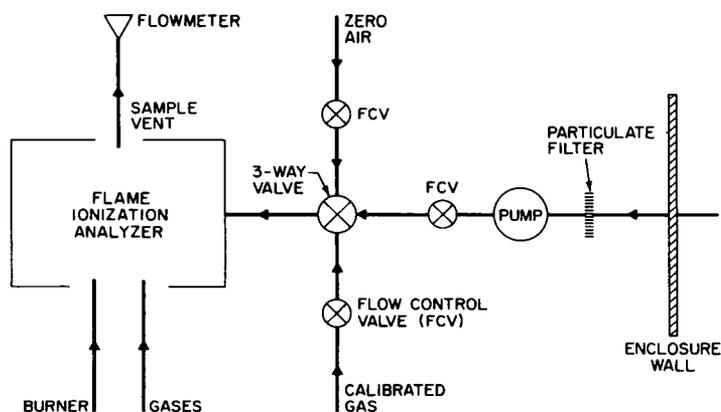


FIG. 2—FID SAMPLE TRAIN

throughout soak test. Abort any test if the hydrocarbon concentration exceeds 15,000 ppm carbon, and immediately vent the enclosure. This concentration provides a 4:1 safety factor against the lean flammability limit.

4.2.7 Read hydrocarbon concentration at the end of the soak and subtract initial from final reading to determine the net concentration of hydrocarbons.

4.2.8 Read barometric pressure and final enclosure interior air temperature to calculate evaporative emission in grams.

4.3 Calculation of Emissions—The weight of emissions is calculated from the net hydrocarbon concentration of the enclosure in ppm carbon, net enclosure volume, temperature and pressure, using the following equation:

$$W_{\text{HC}} = \frac{K C_{\text{HC}} V P \times 10^{-4}}{T}$$

where:

$W_{\text{HC}}$  = hydrocarbon weight, grams

$C_{\text{HC}}$  = net hydrocarbon concentration as ppm carbon

$V$  = net enclosure volume, ft<sup>3</sup> (subtract car volume for vehicle tests—approximately 50 ft<sup>3</sup> with windows and trunk open)

$P$  = barometric pressure, in. Hg

$T$  = enclosure ambient temperature, R

$K$  = 0.208 (12 + H/C) = 2.97 for average evaporative emissions

Note that hydrocarbon concentration is stated in ppm carbon, that is, ppm propane  $\times 3$ . Derivation of this equation is shown in Appendix A.

4.4 Car Background Emissions—Vehicles contain many sources of nonfuel hydrocarbon emissions. Experience shows these emissions to be relatively small for vehicles more than 60 days old that are in good repair. However, the “background” emissions should be measured and subtracted from the values observed during the soak sequences. Appendix C details procedures for measurement of car background emissions.

5. Preparation of Test Vehicle and Fuel System—Some suggestions on vehicle preparation follow, but it may be necessary to expand or modify them for individual cases.

5.1 Instrumentation—Tank fuel temperature must be monitored continuously during all sequences of the test. A thermocouple to read tank fuel temperature must be located near the geometric center of the tank fuel liquid. Additional thermocouples, fuel system pressure taps, etc., may be installed on the test vehicle provided they do not affect the operation of the vehicle or function of the evaporative control system.

5.2 Visual Inspection—After instruments have been installed, the engine should be started and run for approximately 5 min. The vehicle should be inspected for liquid fuel or oil leaks while the engine is running. Leaks must be repaired and all traces of fuel spillage removed. Special care should be exercised to eliminate any leaks in the windshield washer system. Washer solvents usually contain a hydrocarbon compound that will be detected by the hydrocarbon analyzer and recorded as a fuel evaporative loss.

5.3 Fuel System Pressure Test—A pressure test of the fuel tank assembly, filler cap, filler pipe, fuel lines, fuel vapor lines, and other components should be made to insure the integrity of the fuel system and to check performance of any pressure control device(s) of the evaporative control system.

A pressure test is not absolutely necessary with the enclosure method, but it does serve to detect fuel leaks that would affect magnitude of the fuel emissions observed.

Dry nitrogen is preferred for pressure testing, but air can be used. Pressures must not significantly exceed the maximum designed operating pressures of the fuel system. Usually, a loss of pressure of less than 10% of the initial stabilized system pressure in 30 min is adequate evidence of fuel system integrity.

No pressure test should be made if it might adversely affect the subsequent performance of the evaporative control system. If the evaporative control system employs a vapor-storage device, the pressure test must not either purge or load the device.

5.4 Car Background Emissions—Determine car background emissions per Appendix C.

5.5 Loading Evaporative Control Systems—If a vehicle is equipped with an evaporative emission control system, before any tests are made the control system must be properly “loaded” by operating the vehicle until the amount of hydrocarbons retained in the control system is at equilibrium. Surveys of driving practices have indicated that typical vehicle use in a metropolitan area consists of three to four 7 mile trips per day, and of course, three or four hot soaks and one diurnal soak daily.

Some vapor storage devices—such as charcoal absorbers—have the capacity to retain more vapors (as might be emitted during diurnal or hot soak phases) than can be purged during a single 7 mile trip. Systems using these devices are called “accumulative.” Present experience indicates that systems using the engine crankcase as an absorber are not accumulative; usually, this system will purge all stored vapors in one trip. However, in either system, but especially in an accumulative system, vapor loading too high at the start of a test could result in unrealistically high emissions. With an accumulative system, vapor loading too low at the start of a test could result in unrealistically low emissions. Several criteria can be used to judge whether the control system is properly loaded. Which one should be used depends upon the type of control system and the test objectives.

If the test objectives are to measure evaporative emissions in a sequence representing one diurnal soak, one 7 mile trip, and a 1 hr hot soak in which the control system is to be purged of all vapor generated by the diurnal and hot soak phases (that is, purge grams > stored diurnal grams + stored hot soak grams), proper loading of the control system would be obtained by these steps:

For an accumulative system in which the vapor storage device can be weighed:

- (1) Weigh the vapor storage device.
- (2) Drain and refill the fuel tank.
- (3) Perform a diurnal soak.
- (4) Push vehicle onto the chassis dynamometer and run the dynamometer test equivalent to the 7 mile trip. The engine must be shut down 3 min  $\pm$  15 sec after the end of the test.
- (5) Perform a 1 hr hot soak.
- (6) Weigh the vapor storage device.
- (7) Repeat steps 2 through 6 until the weight of the device is constant within 5.0 grams.

For a nonaccumulative system:

- (1) Drain and refill the fuel tank.
- (2) Perform a diurnal soak.
- (3) Push vehicle onto the chassis dynamometer and run the dynamometer test. The engine must be shut down 3 min  $\pm$  15 sec, after the end of the test.
- (4) Perform a 1 hr hot soak.

If the test objectives are to measure evaporative emissions in a test sequence representing one diurnal soak, three 7 mile trips, and a hot soak following each trip in which the control system is to be purged of all vapor generated during the diurnal and hot soaks (that is, purge grams per trip = (stored diurnal grams/3) + stored grams per hot soak), proper loading of accumulative control system which can be weighed would be obtained by these steps:

- (1) Weigh the vapor storage device.
- (2) Drain and refill the fuel tank.
- (3) Perform a diurnal soak.
- (4) Reweigh the vapor storage device to determine the increase in fuel vapor content (stored grams).
- (5) Push vehicle onto the chassis dynamometer and run the dynamometer test. The engine must be shut down 3 min  $\pm$  15 sec after the end of the test.
- (6) Weigh the vapor storage device to determine its loss in fuel vapor content (purged grams). Making this measurement interrupts the test sequence, but should not affect test results if it is done quickly (within 1 or 2 min).

- (7) Perform a 1 hr hot soak.
- (8) Weigh the vapor storage device to determine the increase in fuel vapor content (stored grams).
- (9) Repeat these steps, individually and/or in sequence, until it is evident that the purged grams from one dynamometer test run equals or exceeds one-third of the stored diurnal grams and all of the stored hot soak grams.

It is permissible to artificially load the vapor storage device with fuel vapors to shorten the number of tests needed to obtain equilibrium loading of the device.

**6. Test Sequences**—The test sequence consists of three phases intended to simulate typical vehicle usage in a metropolitan area during the summer months:

- (1) A 1 hr diurnal soak during which time the tank fuel is heated from 60 to 84 F.
- (2) A 7 mile run (approximate) conducted on a chassis dynamometer from a "cold" start.
- (3) A 1 hr hot soak immediately following the 7 mile run.

Evaporative emissions from the vehicle fuel system are measured during each of the three phases. However, measurements during the run phase on a vehicle with an evaporative control system may be omitted if it is apparent that by system design, all "running losses" will be inducted into the engine. If "running loss" measurements are required, the trap method must be used to measure emissions during the run phase.

**6.1 Vehicle Temperature Stabilization**—Before the test, the vehicle must be soaked (engine off) for a minimum of 11 hr at an ambient temperature of 68-86 F so that all parts stabilize at the prescribed temperature. The vehicle preconditioning and the remaining steps described in this section must be performed in sequence and without interruption. This soak should be limited to not more than 16 hr unless the ambient temperature increases beyond that time can be held to less than 4 F. It is assumed that no significant vapor loading of a storage system, due to tank breathing, occurs during this soak (after the initial hot soak following any required preconditioning run).

**6.2 Tank Refueling**—The fuel tank must be drained and refilled to the tank fuel volume with fresh test fuel. After refueling, temperature of the fuel in the tank must be 60 ± 1 F.

### 6.3 Soak and Running Phases

**6.3.1 DIURNAL BREATHING LOSS**—Following tank refueling, push vehicle into the enclosure. Seal the enclosure and heat the tank fuel 24 ± 1 F from a temperature of 60 ± 1 F at a constant rate during a period of 60 ± 10 min. The enclosure interior air temperature should be held between 68 and 86 F.

**6.3.2 PREPARATION FOR RUNNING**—At the end of the 1 hr soak, record final enclosure hydrocarbon concentration and auxiliary information required to calculate emissions.

If required, connect traps to measure "running losses" from tank vents or other fuel system vents.

**6.3.3 RUNNING LOSS**—Push test vehicle onto the chassis dynamometer. Time between the end of the diurnal soak and starting the engine for this phase should not exceed 15 min. Run according to dynamometer test as described in Appendix E.

Immediately after completion of the dynamometer test, shut off the cooling fan, but allow the engine to continue running at idle while the instruments and/or test equipment connections are disengaged from the vehicle. Drive the vehicle off the dynamometer and into the enclosure at minimum throttle. Time from completion of the dynamometer test until engine shutdown, which begins the hot soak, must be controlled to 3 min ± 15 sec.

**6.3.4 HOT SOAK PHASE**—Turn off the enclosure purge blower and seal the enclosure door immediately after engine shutdown.

Soak vehicle in the enclosure with the hood down for 1 hr. Enclosure interior air temperature during the final 55 min should be held between 76 and 90 F. Perform necessary measurements and calculations as described for the diurnal soak phase.

**7. Information and Data to be Recorded**—Details are listed on the sample data sheet in Appendix D.

### 7.1 Information

- Test identification.
- Tests performed and description.
- Vehicle description.
- Engine description.
- Fuel system description.

### 7.2 Data to be Collected

- Temperatures.
- Car enclosure method records.

## 8. Presentation of Data

- Objective of test.
- Description of system under test.
- Conclusion from the test.
- Discussion of the test and the system.
- Test tabulation or plots.

## APPENDIX A—DERIVATION OF CAR ENCLOSURE EQUATION

Weight of evaporative emissions by the car enclosure technique:

$$W = \frac{KC_{HC}VP \times 10^{-4}}{T} \quad (1)$$

To derive this equation begin with the usual statement of the perfect gas law:

$$pV = WRT \quad (2)$$

For the subject application let:

N = number of carbon atoms in the average hydrocarbon molecule  
Then the molecular weight of the average hydrocarbon molecule is:

$$N(12 + H/C) \text{ and } R = \frac{1545}{N(12 + H/C)}$$

Substituting this value for R and manipulating Eq. 2:

$$W = \frac{pV}{\frac{1545 T}{N(12 + H/C)}} \quad (3)$$

The volume V of Eqs. 2 and 3 must be the partial volume of the hydrocarbons contained in the car enclosure.

$$V_{HC} = \frac{C_{HC} \times 10^{-6}}{N} \quad (4)$$

where: V = enclosure.

Substituting this expression for V into Eq. 3 gives

$$W = \frac{\frac{pVC_{HC} \times 10^{-6}}{N}}{\frac{1545 T}{N(12 + H/C)}} = \frac{pVC_{HC} \times 10^{-6} (12 + H/C)}{1545 T} \quad (5)$$

where V now represents enclosure volume.

If the proper dimensional factors are applied to Eq. 5 to give W in grams and p in inches of Hg (change to P), it becomes

$$W = \frac{0.208 \times 10^{-4} PVC_{HC} (12 + H/C)}{T} \quad (6)$$

Then if the parameter K is substituted for 0.208 × (12 + H/C), the original form of the equation appears:

$$W = \frac{KC_{HC} VP \times 10^{-4}}{T} \quad (7)$$

Analyses of condensed vehicle evaporative losses have provided H/C and corresponding K values of:

- 2.95 for H/C of 2.2 (carburetor evaporative losses)
- 2.98 for H/C of 2.33 (tank evaporative losses)

## APPENDIX B—CAR ENCLOSURE SYSTEM CHECKOUT

**Calibration**—Zero and calibrate gas analyzer. After discharging purge blower into enclosure for several minutes, seal door and read enclosure background hydrocarbon (HC) concentration.

Inject a minimum of 10 grams of light hydrocarbon material (for example, propane) into the enclosure. (This can be conveniently accomplished with a valved probe through an enclosure wall similar to the sample probe described in paragraph 4.1. A small pressure vessel containing the propane should be weighed before and after discharge into the enclosure through the probe.)

After 3-5 min of mixing blower operation, read the stabilized enclosure HC concentration. Subtract the enclosure background and use the net concentration to calculate the enclosure contained weight of hydrocarbon material.

Discrepancy between the enclosure indicated hydrocarbon weight and the weight of injected material should be less than 5% for a satisfactory calibration.