

Submitted for recognition as an American National Standard

Issued 1993-02  
Reaffirmed 2003-03

Superseding J1814 FEB1993

**Operator Controls—Off-Road Machines**

**Foreword**—This reaffirmed document has not changed other than to put it into the new SAE Technical Standards Board Format. Definitions were changed to Section 3. All other section numbers have changed accordingly.

**1. Scope**

- 1.1** General criteria are presented as guidelines for: control device location, resistance, and actuation of hand and foot controls by the machine's operator. The criteria are based upon physical limitations as defined by human factors engineering principles.
- 1.2** This SAE Recommended Practice applies to upright seated operators of Construction, General Purpose Industrial, Forestry, Specialized Mining Machinery and Agricultural Tractor categories of off-road, self-propelled work machines as identified in SAE J1116. The criteria presented should apply to most situations. Each situation, however, must be evaluated as to its own function and its relationship to other functions to achieve the desired operation action in normal and emergency situations with high probability. The values for control displacement and resistance apply only to what is required to achieve the desired performance of the function being controlled for the 5th through the 95th percentile person as defined in SAE J/ISO 3411.

**2. References**

- 2.1 Applicable Publications**—The following publications form a part of this specification to the extent specified herein. The latest issue of SAE publications shall apply.
- 2.1.1 SAE PUBLICATIONS**—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J1116—Categories of Off-Road Self-Propelled Work Machines

SAE J1362—Symbols of Controls, Indicators, and Tell-Tales for Off-Road, Self-Propelled Machines

SAE J/ISO 3411—Earth-moving machinery — Human physical dimensions of operators and minimum operator space envelope

SAE J/ISO 6682—Earth-moving machinery — Zones of comfort and reach for controls

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2003 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)

Tel: 724-776-4970 (outside USA)

Fax: 724-776-0790

Email: [custsvc@sae.org](mailto:custsvc@sae.org)

<http://www.sae.org>

SAE WEB ADDRESS:

### 3. Definitions

**3.1 Control**—Device actuated by a person to effect a response of the machine, its equipment, or its tools.

3.1.1 **FREQUENTLY OPERATED CONTROL**—A control with an average operational interval of 5 min or less between actuations during a normal operational cycle. This control is the same as the primary control defined in SAE J/ISO 6682.

3.1.2 **INFREQUENTLY OPERATED CONTROL**—A control with an average operational interval of more than 5 min between actuations during a normal operational cycle. This control is the same as the secondary control defined in SAE J/ISO 6682.

**3.2 Control Displacement**—Movement of a control through its operational range.

**3.3 Control Resistance**—The force exerted by the operator to effect a control displacement.

3.3.1 **NORMAL OPERATIONAL RESISTANCE**—Force applied to achieve the desired control function under normal operating conditions.

3.3.2 **SYSTEM MALFUNCTION RESISTANCE**—Force applied to achieve the desired control function whenever a malfunction occurs that affects the system's performance or whenever the system serves as a back-up to another primary system such as loss of power resource.

3.3.3 **MINIMUM CONTROL RESISTANCE**—Force applied necessary for functional input to the operator senses.

**3.4 Forward**—Direction the operator faces while seated in the operator's seat with the machine and the operator's seat in the position for straight, forward travel as defined by the manufacturer.

**3.5 Minimum Control Strength**—Ability of the control system to withstand a single excessive application of effort or load by the operator without being destroyed or impeding its primary function. The control device may be deformed as long as the primary function can be accomplished.

### 4. General Criteria

**4.1 Enclosure Space Envelope**—The minimum normal operator enclosure space envelope and the minimum clearance between the operator controls and enclosure surfaces are provided in SAE J/ISO 3411.

#### 4.2 Control Response

4.2.1 A control actuation should produce the expected functional response, movement rate, and direction of movement.

4.2.2 Controls shall provide a positive sensory feedback (visual, audio, touch, etc.) of actuation and/or position to the operator.

#### 4.3 Control Location, Displacement Resistance

4.3.1 Control location and direction of movement and reference to the operator while in the normal operation position for that control.

4.3.2 Frequently operated controls, including their displacements shall be located within the zone of comfort as defined in SAE J/ISO 6682.

## SAE J1814 Reaffirmed MAR2003

- 4.3.3 Infrequently operated controls including their displacements, shall be located within the zone of reach as defined in SAE J/ISO 6682.
- 4.3.4 Control location relative to the operator may be adjustable to enhance compatibility of different size operators.
- 4.3.5 A control shall not be located where it could cause ambiguity as to its direction of motion to actuate a function. Location of a control on a 30 to 60 degree sloping surface should be avoided if its direction of motion to achieve the same function is dependent upon the plane of the control's mounting surface. For example, a lever control for a raise/lower function should not be located on a 30 to 60 degree sloping surface since its recommended direction of motion changes when it is moved from a vertical to a horizontal plane.
- 4.3.6 When a sequence of controls is repeated on another panel, the sequence of controls should be the same for each panel.
- 4.3.7 Control displacement and control resistance shall comply with the values in Table 1.
- 4.3.7.1 Infrequently operated control's displacement and resistance are not to exceed the boundaries set by  $D_3$  and  $R_3$  shown in Figure 1 with values from Table 1.
- 4.3.7.2 Frequently operated control's displacement and resistance are not to exceed the values for X and Y as computed by using the formulas of Figure 1 and values from Table 1.
- The formulae are dependent equations, solved by selecting values for the dependent variable.
- 4.3.8 Control resistance necessary to actuate a control that has been affected by a system malfunction may be higher than specified for normal operation resistance. The values specified for maximum system malfunction resistance in Table 1 are intended to provide boundary conditions for operator activation during and at the time of the malfunction.
- 4.3.9 Minimum control resistance shall be sufficient to avoid inadvertent actuation by the force of the hand or foot resting on the control during anticipated operating condition. As a general guideline, it should not be less than specified in Table 1 when actuating controls on a moving machine.
- 4.3.10 Minimum control strength should be at least five times the anticipated normal and malfunction operator effort considering the function of the control and its relative location and direction of motion.

### 4.4 Direction of Movement

- 4.4.1 Direction of movement of controls should be consistent with the related motion of the controlled item. Other factors should also be considered such as past practices, general trained responses, emergency reactions, ease of operations, interaction with other controls, and strength requirements.
- 4.4.2 The direction of movement prescribed in Figure 2 shall be followed if there are no significant overriding factors.

TABLE 1—CONTROL DISPLACEMENT AND RESISTANCE

CONTROL Except (2) Steering Wheel (3) Brake Controls Figure 1 Ref.	Displacement Units	Displacement Minimum D <sub>1</sub>	Displacement Maximum Frequent Operation D <sub>2</sub>	Displacement Maximum Infrequent Operation D <sub>3</sub>	Resistance Units	Resistance Minimum R <sub>1</sub>	Resistance Maximum	Resistance Maximum	Resistance
							Normal Operation Frequently R <sub>2</sub>	Normal Operation Infrequently R <sub>3</sub>	Maximum System Malfunction R <sub>4</sub>
FINGER OPERATED									
Linear Motion Type									
Membrane Switch	mm	0.4	1.2	1.6	N	2.0	8.0	10.0	20.0
Push Button	mm	2.0	6.0	8.0	N	2.5	10.0	13.0	25.0
Slide/Toggle Rocker Switch	mm	3.0	25.0	32.0	N	2.5	10.0	13.0	25.0
Thumb Wheel									
a. discrete motion	mm	5.0	16.0	20.0	N	3.0	12.0	15.0	30.0
b. continuous motion	mm	—	—	—	N	2.0	8.0	10.0	20.0
Rotary Motion Type									
Selector switch - stop to stop	deg	10.0	30.0	40.0	N·m	0.15	0.6	0.75	1.5
Key Switch/Rotary knob	deg	30.0	90.0	120.0	N·m	0.15	0.6	0.75	1.5
Continuous Adjustment knob	deg	—	—	—	mN·m	10.0	40.0	50.0	100.0
HAND OPERATED									
Linear Motion Type									
Push button	mm	10.0	30.0	40.0	N	5.0	20.0	25.0	50.0
Push-pull									
a. Knob	mm	10.0	30.0	40.0	N	3.0	12.0	15.0	30.0
b. Handle	mm	15.0	45.0	60.0	N	12.0	48.0	60.0	120.0
Lever (6)									
a. Longitudinal	mm	100.0	300.0	400.0	N	20.0	80.0	100.0	200.0
b. Transverse	mm	60.0	190.0	250.0	N	15.0	60.0	75.0	150.0
c. Vertical	mm	80.0	240.0	320.0	N	15.0	60.0	75.0	150.0
Rotary Motion Type									
Crank	turns	—	—	—	N·m	0.4	1.6	2.0	4.0
Handle	deg	20.0	60.0	80.0	N·m	0.5	2.0	2.5	5.0
Wheel	turns	1.0	4.0	5.0	N·m	3.0	12.0	15.0	30.0
Steering (see Figure 3)									

NOTE 1—The relationship of resistance to displacement may reduce the maximum value of the frequently operated control displacement or resistance value. See 4.3.7 and Figure 1.

NOTE 2—See 5.1.5 and Figure 3 for steering wheel normal operation and system malfunction resistance values.

NOTE 3—See 5.2.5 for brake controls resistance values.

NOTE 4—See 4.3.10 for minimum control strength requirements.

NOTE 5—Minimum resistance may be lower than specified if the control is primarily actuated when the machine is not in motion such as the backhoe controls on a backhoe loader.

NOTE 6—Displacement of Hand-operated Lever controls are for bidirectional control, for unidirectional use 1/2 these values.

NOTE 7—When controls are operating at “minimums,” there shall be adequate sensory feedback to the operator per 4.2.2.

**TABLE 1—CONTROL DISPLACEMENT AND RESISTANCE (CONTINUED)**

CONTROL Except (2) Steering Wheel (3) Brake Controls Figure 1 Ref.	Displacement Units	Displacement Minimum D <sub>1</sub>	Displacement	Displacement	Resistance Units	Resistance Minimum R <sub>1</sub>	Resistance	Resistance	Resistance Maximum System Malfunction R <sub>4</sub>
			Maximum Frequent Operation D <sub>2</sub>	Maximum Infrequent Operation D <sub>3</sub>			Maximum Normal Operation Frequently R <sub>2</sub>	Maximum Normal Operation Infrequently R <sub>3</sub>	
FOOT OPERATED									
Push Button	mm	15.0	45.0	60.0	N	20.0	60.0	90.0	180.0
Pedal									
Ankle Action									
a. Toe Operated	mm	20.0	60.0	80.0	N	12.0	48.0	60.0	120.0
b. Heel and toe	mm	8.0	24.0	32.0	N	12.0	48.0	60.0	120.0
Leg & Foot Actuated									
a. No back support	mm	30.0	90.0	120.0	N	30.0	120.0	150.0	300.0
b. With back support	mm	30.0	90.0	120.0	N	75.0	300.0	375.0	700.0

NOTE 1—The relationship of resistance to displacement may reduce the maximum value of the frequently operated control displacement or resistance value. See 4.3.7 and Figure 1.

NOTE 2—See 5.1.5 and Figure 3 for steering wheel normal operation and system malfunction resistance values.

NOTE 3—See 5.2.5 for brake controls resistance values.


NOTE 4—See 4.3.10 for minimum control strength requirements.

NOTE 5—Minimum resistance may be lower than specified if the control is primarily actuated when the machine is not in motion such as the backhoe controls on a backhoe loader.

NOTE 6—Displacement of Hand-operated Lever controls are for bidirectional control, for unidirectional use 1/2 these values.

NOTE 7—When controls are operating at “minimums,” there shall be adequate sensory feedback to the operator per 4.2.2.

SAENORM.COM : Click to view the full PDF of J1814 - 200303

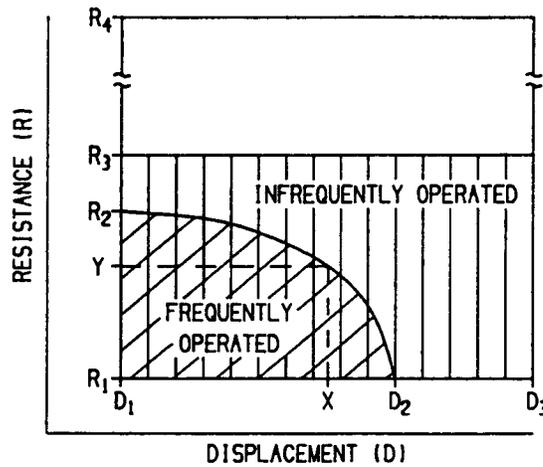

DEFINITIONS:

X = Maximum control displacement for frequently operated control with resistance of "Y" where:

$$X = D_1 + \sqrt{\left[ (D_2 - D_1)^2 \right] \left[ 1 - \frac{(Y - R_1)^2}{(R_2 - R_1)^2} \right]}$$

Where Y is a known value in the Range R<sub>1</sub> to R<sub>2</sub>

Y = Maximum control resistance for frequently operated control with displacement "X" where:

$$Y = R_1 + \sqrt{\left[ (R_2 - R_1)^2 \right] \left[ 1 - \frac{(X - D_1)^2}{(D_2 - D_1)^2} \right]}$$

Where X is a known value in the Range D<sub>1</sub> to D<sub>2</sub>

- D<sub>1</sub> = Minimum control displacement
- D<sub>2</sub> = Maximum control displacement - frequently operated control
- D<sub>3</sub> = Maximum control displacement - infrequently operated control

- R<sub>1</sub> = Minimum control resistance
- R<sub>2</sub> = Maximum control resistance - frequently operated control
- R<sub>3</sub> = Maximum control resistance - infrequently operated control
- R<sub>4</sub> = Maximum system malfunction resistance

EXAMPLE:

Hand operated lever. Longitudinal motion (Table 1; 2.1.3a).

Values from TABLE 1; 2.1.3a	
D <sub>1</sub> = 100 mm	R <sub>1</sub> = 20 N
D <sub>2</sub> = 300 mm	R <sub>2</sub> = 80 N
D <sub>3</sub> = 400 mm	R <sub>3</sub> = 100 N
	R <sub>4</sub> = 200 N

SOLUTION	
Y (N)	X (mm)
40	289
60	249
70	210
75	180


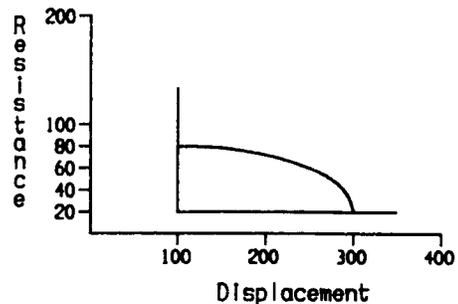


FIGURE 1—COMPUTATION OF MAXIMUM CONTROL DISPLACEMENT AND RESISTANCE FOR FREQUENTLY OPERATED CONTROLS (REFERENCE 4.3.7 AND TABLE 1)


# CONTROL DIRECTION OF MOVEMENT

**GENERAL NOTES**  
 All controls shall be located within the operator's zone of reach as defined by SAE J898.  
 Black arrow indicates control movement for response listed.  
 White arrow indicates opposite to black arrow.  
 Manual liquid valves rotate clockwise to shut off.  
 Prime work area for applicable mobile equipment are panels "H", "C", "B" and "J".  
 Rotary or push pull controls can pull for "on" and push for "off".

- 1 INCREASE  
ON  
START  
FORWARD  
CLOCKWISE
- 2 INCREASE  
ON  
START  
DOWN  
LOWER
- 3 INCREASE  
ON  
START  
FORWARD  
UP  
RAISE
- 4 INCREASE  
ON  
START  
BACKWARD  
CLOCKWISE
- 5 INCREASE  
ON  
START  
CLOCKWISE  
RIGHT

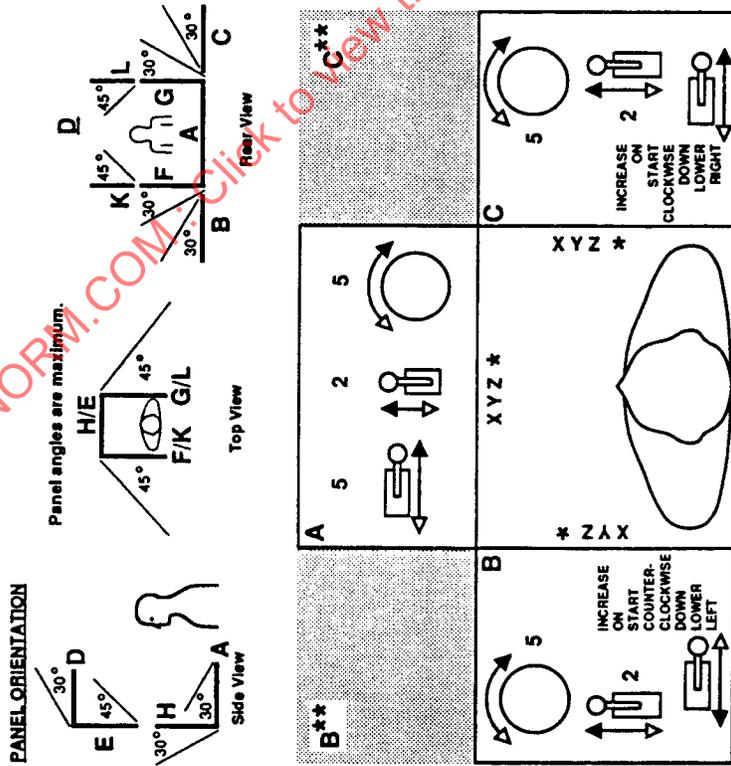

**NOTES**  
 Horizontal control panels "A", "B" and "C" can be lifted up to 30 degrees.  
 Panels shown for operator who does not rotate. If controls are designed with operator rotation in mind, panels "B" and "C" must be identical with panel "A".  
 \* Sequential order for related controls:  
 If a normal or natural order exists for related controls, the order on different panels should be in the sequence shown.  
 Right - left actuated control usage in these areas may lead to control ambiguity and should be avoided.

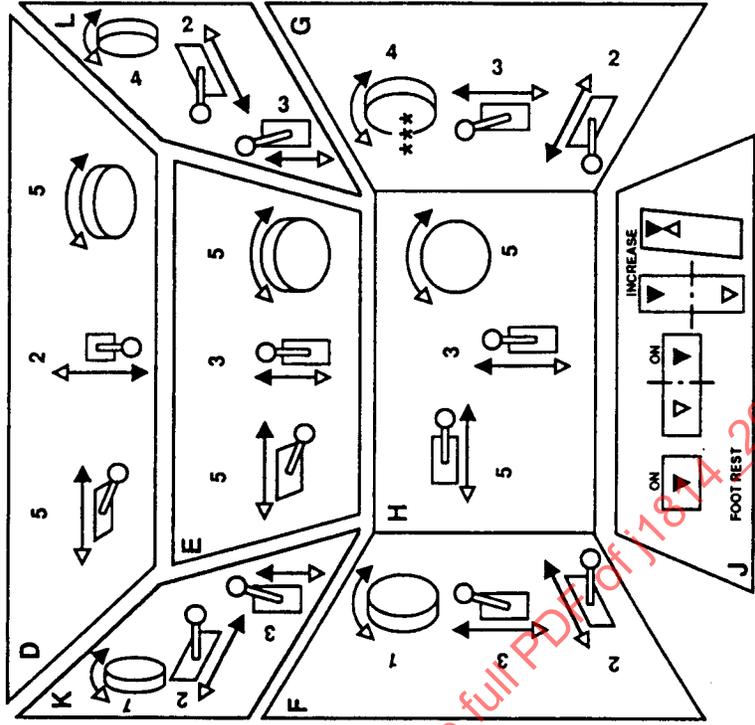

**NOTES**  
 Overhead panel "D" shall be horizontal or up to 30 degrees above horizontal.  
 High panel "E" angled 45 degrees or less from vertical.  
 If operator can turn to face side panels "F" or "G", all controls would be similar to "H".  
 Vertical panels "F" and "G" are angled less than 30 degrees.  
 Overhead panels are to be used for infrequently operated controls.  
 \*\*\* If a rotary control on panel "G" is related to or operated simultaneously with a rotary control on panel "F", the control motion is opposite to that shown on "G" for backward, increase, on, and start.

FIGURE 2—CONTROL DIRECTION OF MOVEMENT

## 4.5 Control Arrangement

- 4.5.1 Machines, which frequently require hand coordination to simultaneously control machine travel and tool operations, should have machine travel motion controls operated by one hand and tool controls by the other. If the control system is designed to permit simultaneous operations of the travel motion and tools by combined function controls, there should be continuous contact with the control to achieve these functions.
- 4.5.2 Space between controls shall be sufficient to allow operation without unintentional actuation of adjacent controls. Suggested minimum clearances between controls are as follows:
- Finger tip operated—10 mm—if control resistance is 10 N or less
  - Hand operated (palm grasp)—25 mm—if control resistance is 50 N or less  
50 mm—if control resistance is greater than 50 N
  - Foot operated—50 mm

Additional spacing should be provided for operators wearing cold weather or other protective clothing, reference SAE J/ISO 3411.

- 4.5.3 Overlapping of control zone locations is permissible to provide independent and simultaneous control action.

## 4.6 Identification

- 4.6.1 Control functions and movements shall be identified, preferably by symbols, so that the operator can determine the proper control function and movement without trial and error. If symbols are used, they shall comply with SAE J1362 where applicable.
- 4.6.2 Identification is not required for controls which have universal recognition by virtue of their shape, locations, arrangements, and method of actuation such as a steering wheel, foot-operated clutch pedal, service brake pedal, and accelerator pedal.
- 4.7 **Combined Functions Control**—A control with combined functions is acceptable. It should follow the guidelines of this document where applicable.
- 4.8 **External Forces**—Control actuators, control linkages, and other vulnerable components shall be arranged or protected to minimize actuation or damage by external forces such as being stepped on, grabbed, and hit by obstacles (e.g., brush).
- 4.9 **Pedal Surface**—Pedal surfaces shall be slip-resistant. Stops at edge of the pedal should be provided when needed to help prevent the foot from slipping off.

## 5. Controls Common on Machines

- 5.1 **Steering Control**—The steering device may be a hand-operated steering wheel, a single or dual hand lever, single or dual foot pedals.
- 5.1.1 When steering is accomplished through rotational actuation by a wheel, a tee handle, a lever or other similar means, clockwise motion shall effect a right turn and counterclockwise motion a left turn while travelling forward. A steering wheel control shall be approximately centered in front of the operator's seat with at least 180 degrees of its arc located within the zone of comfort as defined in SAE J/ISO 6682.
- 5.1.2 When a single hand lever type control that steers by lateral motion is provided, a lateral motion to the right shall effect a right turn and to the left a left turn while travelling forward.

## SAE J1814 Reaffirmed MAR2003

- 5.1.3 When two hand-operated levers and/or two foot-operated pedals are provided for steering by controlling the speed and/or direction of the driving elements, the relative position of the hand levers or foot pedals with respect to each other in the plane of movement shall cause the machine to execute a turn.
- 5.1.4 Controls that have primarily two directions of movement away from neutral shall:
- 5.1.4.1 Effect forward travel and increasing forward speed of the selected driving element by moving the respected lever or pedal forward from the neutral position.
- 5.1.4.2 Effect rearward travel and increasing rearward speed of the selected driving element by moving the controls generally rearward or toward the operator.
- 5.1.5 Steering wheel resistance shall not exceed the values shown in Figure 3.

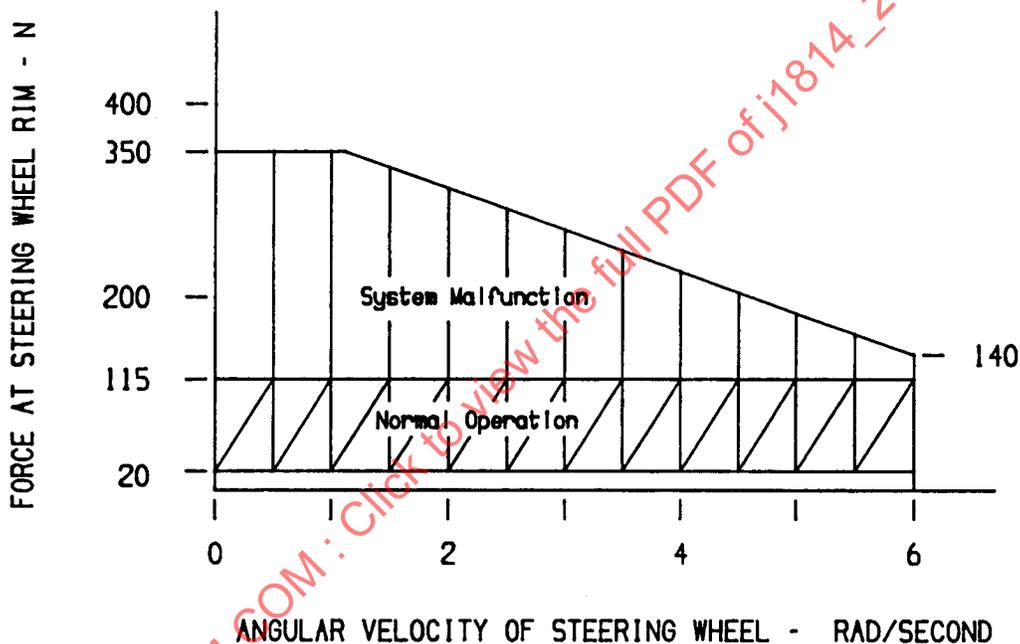


FIGURE 3—STEERING WHEEL RESISTANCE (REFERENCE 5.1.5)

## 5.2 Brake Control

- 5.2.1 The primary service brake foot control shall be actuated with the right foot except when individual brakes are used for steering and/or speed control as well as braking. Forward and/or downward motion shall progressively engage the foot brake control application. When a transmission power source disconnect, if equipped, is not foot actuated, brakes may also be operable by either foot.
- 5.2.2 The secondary and parking brake controls may be actuated by either hand or foot. The direction of motion for hand-actuated control shall be upward and/or rearward for engagement. Foot-operated control, shall be located to the left of the service brake pedal and to be primarily actuated with the left foot with forward and/or downward motion progressively engaging the brake.
- 5.2.3 If a control for a service, secondary, or parking brake is combined with another function, the brake function shall have priority over the other function insuring that the brake will function independent of the other functions.