



SURFACE VEHICLE RECOMMENDED PRACTICE

SAE J1889 JUN2011

Issued 1988-06
Reaffirmed 2011-06

Superseding J1889 JUL2005

L.E.D. Signal and Marking Lighting Devices

RATIONALE

J1889 has been reaffirmed to comply with the SAE 5-Year Review policy.

1. **Scope**

This SAE Recommended Practice applies to functions of motor vehicle signalling and marking lighting devices which use light emitting diodes (L.E.D.'s) as light sources. This report provides test methods, requirements, and guidelines applicable to the special characteristics of L.E.D. lighting devices. This Recommended Practice is in addition to those required for devices designed with incandescent light sources. This report is intended to be a guide to standard practice and is subject to change to reflect additional experience and technical advances.

SAENORM.COM : Click to view the full PDF of J1889-201106

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2011 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J1889_201106**

2. References

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. The latest issue of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001 or at www.sae.org.

SAE J575—Test Methods and Equipment for Lighting Devices and Components for Use on Vehicles
Less than 2032 mm in Overall Width

SAE J759—Lighting Identification Code

SAE J1330—Photometry Laboratory Accuracy Guidelines

SAE J2139—Test for Signal and Marking Devices Used on Vehicles 2032 or More in Overall Width

2.2 Related Publications

The following publications are provided for information purposes only and is not a required part of this specification. The latest issue of SAE publications shall apply.

2.2.1 SAE PUBLICATIONS

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001 or at www.sae.org.

SAE J387—Terminology—Motor Vehicle Lighting

SAE J578—Color Specification

SAENORM.COM : Click to view the full PDF of J1889 - 201106

3. Definitions

3.1 Semiconductor

A material whose resistivity lies in the broad range between conductors and insulators.

3.2 L.E.D.

An indivisible, discrete light source unit containing [a] semiconductor junction[s] in which visible light is produced when forward current flows as a result of applied voltage.

3.3 L.E.D. Lighting Device

A device in which light is produced by a single or an array of L.E.D. light source unit(s).

3.4 Incandescent Light Source

Device in which light is produced by means of one or more filaments heated to incandescence by the passage of an electric current.

3.5 L.E.D Light Source Center

For a single L.E.D. light source unit, the point that is located at the geometric center of the junction where the luminescence takes place, or the surface from which luminescence appears to originate.

3.6 L.E.D. Lighting Device Light Center

The geometric center of all the single L.E.D. light source centers within the L.E.D. array(s) used to illuminate the device function, or the geometric center of the illuminated area if the light output is produced indirectly.

3.7 Optically Combined L.E.D. Light Source

The definition of "Optically Combined" in SAE J387 shall also apply to a lamp using L.E.D. light sources by substituting "L.E.D." for the term "filament" in the definition.

3.8 Photometric Stability

The point at which the photometry value is stable to within $\pm 5\%$ of the measured value over the previous 15 minute period.

4. Lighting Identification Code

4.1 The device shall be marked in accordance with SAE J759. Refer to specific device standards for possible additional marking requirements at the discretion of the manufacturer.

5. Tests

The following section describes individual tests which need not be performed in any particular sequence. Testing may be expedited by performing two or more tests simultaneously on separate samples.

5.1 SAE J575 or J2139 is a part of this document. Unless otherwise specified, the following tests are applicable with modifications as indicated.

5.1.1 VIBRATION TEST

The evaluation of the sample at the completion of the test shall also include a functional lighting check. If a partial outage is observed, a photometry test (see 5.1.5) shall be performed and the results recorded.

5.1.2 MOISTURE TEST

5.1.3 DUST TEST

If dust is found on the inside of the lens, the change in the maximum photometric intensity of the sample shall be determined by using the photometric procedures in 5.1.5.

5.1.4 CORROSION TEST

5.1.5 PHOTOMETRY TEST

All photometry tests should be performed in accordance with SAE J1330. Because the photometric output (luminous intensity) of a L.E.D. lighting device typically decreases as the temperature of the L.E.D. light source increases, the following stabilization and measurement methods are required.

5.1.5.1 *Steady-Burning Lamp Functions (such as tail lamps and side marker lamps)*

Energize the applicable test device function and record the H-V photometric value after 1 minute. Continue to energize the test device for 30 minutes or photometric stability whichever occurs first. Record the photometric values at all the required test points, including maximums. Calculate the ratio between the 1 minute H-V reading and the 30 minute (or photometric stability) H-V reading and apply it to all of the required test points, including maximums.

5.1.5.2 *Intermittent Operating Lamp Functions (such as stop lamps and turn signal lamps)*

Energize the applicable test device function and record the H-V photometric value after 1 minute and then again after 10 minutes. Continue to energize the test device for 30 minutes or photometric stability, whichever occurs first. Record the photometric values at all the required test points, including maximums. Calculate the ratio between the 10 minute H-V reading and the 30 minute HV reading and apply it to all of the test points. Calculate the ratio between the 1 minute H-V reading and the 30 minute (or photometric stability) H-V reading and apply it to the test points.

NOTE—Other test methods which yield equivalent results may be used. Examples include eliminating the ratio calculation and directly measuring the maximum photometric value at one minute (for a typical L.E.D. device where photometric values decrease with on-time) or directly measuring values at the specified on-time when the photometric measurement equipment can record near simultaneous readings at all test points. Readings at shorter on-times may also be used when the photometric output vs. time performance of the device is known.

5.1.6 WARPAGE TEST ON DEVICES WITH PLASTIC COMPONENTS

Not required.

5.2 Color Test

The color shall be tested as specified in the SAE report of the applicable device function.

5.3 Thermal Cycle Test

5.3.1 SCOPE

This test evaluates the ability of the sample device to resist optical, electrical, or physical malfunctions due to exposures to repeated changes from hot to cold temperature extremes. Devices installed in vehicle locations that could produce temperatures outside the test range specified may necessitate special test requirements.

5.3.2 TEST EQUIPMENT

A thermal cycle chamber capable of providing the temperature extremes and rates of change of temperature in the temperature-time profile specified in Figure 1.

5.3.3 TEST PROCEDURE

The sample device, mounted on a test fixture shall be subjected to thermal cycles as follows:

5.3.3.1 *Thermal Cycle*

The device shall be tested to the thermal cycle profile shown in Figure 1. The minimum temperature shall be -30 °C, and the maximum temperature shall be 50 °C.

5.3.3.2 *Device Operation*

The device shall be energized at design voltage commencing at point "A" of Figure 1 and de-energized at point "B" of each cycle. When energized, the lighting function(s) shall be cycled as specified by the cycle times in SAE J575, Warpage Test.

5.3.3.3 *Test Duration*

8 complete cycles of the thermal cycle profile shown in Figure 1 shall be completed.

5.3.3.4 Sample Evaluation

During the final thermal cycle, the sample lighting function(s) shall be continuously checked for permanent or intermittent outages while energized from Point "A" (cold temperature) to Point "B" (hot temperature) in Figure 1 and the results recorded. If partial outage occurred, a photometry test (5.1.5) with the remaining functional L.E.D. segments lighted shall be performed and the results recorded. Upon completion of the thermal cycle exposure the sample device shall be visually examined for any cracking, rupture, or warpage of parts and the results recorded. If changes are observed that could result in failure of the other tests contained in Section 5, those test(s) shall be performed on the same sample used for the thermal cycle test and the results recorded.

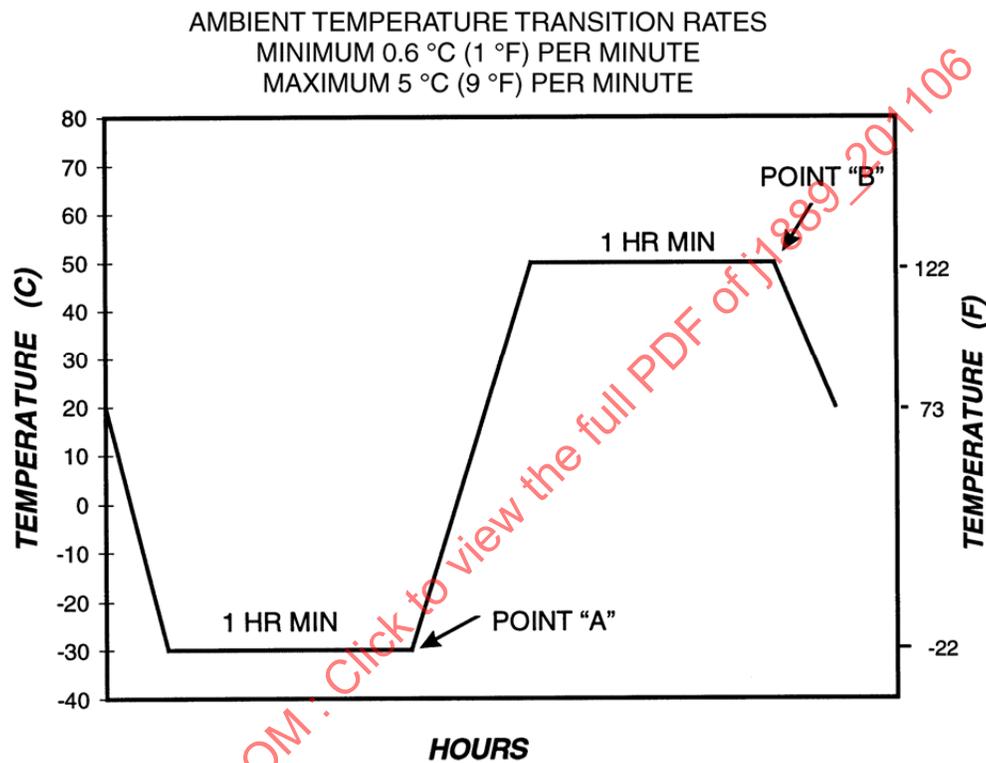


FIGURE 1—THERMAL CYCLE PROFILE

6. Requirements

6.1 Performance Requirements

A L.E.D. lighting device, when tested in accordance with the test procedures specified in Section 5, shall meet the following requirements.

6.1.1 VIBRATION

SAE J575 or J2139. In addition, the following requirements also apply:

6.1.1.1 After completion of test procedure 5.1.1, all L.E.D. light sources contained within the device shall function or the device shall comply with the photometric requirements in 6.1.5 of this document.

6.1.2 MOISTURE

SAE J575 or J2139.

6.1.3 DUST

SAE J575 or J2139.

6.1.4 CORROSION

SAE J575 or J2139.

6.1.5 PHOTOMETRY

The photometric performance requirements in the applicable SAE technical report for the lighting function being tested shall be met under the following conditions.

6.1.5.1 *Steady-burning Lamp Functions*

All photometry test point requirements including maximums shall be met after the 30-minute (or photometric stability) stabilization time and at the 1 minute time, applying the 1 minute/30 minute (or photometric stability) H-V ratio.

6.1.5.2 *Intermittent Operating Lamp Functions*

All photometry test point requirements including maximums shall be met after energized 10 minutes applying the 10 minute/30 (or photometric stability) minute H-V ratio. And at the 1 minute time, applying the 1 minute/30 minute (or photometric stability) H-V ratio.

6.1.5.3 *Lighted Sections*

Photometric requirements specified in the appropriate SAE technical reports which are based on the number of lighted sections shall be applied based on the total projected luminous area for the function being tested. The area shall be equivalent to the number of lighted sections in Table 1.