



SURFACE VEHICLE STANDARD

SAE J1926-3 MAR2010

Issued 1988-08
Revised 2010-03

Superseding J1926-3 OCT2006

(R) Connections for General Use and Fluid Power—Ports and Stud Ends with ASME B1.1 Threads and O-Ring Sealing—Part 3: Light-Duty (L-Series) Stud Ends

RATIONALE

General revision for harmonization with SAE J514 and ISO 11926-3 and addition of sizes -40, -48 and -64 and converting the document to metric hex standard in accordance with FCCTC resolution on metric hex conversion. The resolution provides rationale for converting to metric hex and not using inch hex for new designs as follows:

"In an effort to standardize within a global market and ensuring that companies can remain competitive in an international market, it is the intent to convert to metric hex sizes which will:

- lead to one global standard
- guide users to a preferred system
- reduce complexity
- eliminate duplication
- reduce confusion"

FOREWORD

SAE J1926 consists of the following parts, under the general title:

Connections for general use and fluid power Ports and stud ends with ASME B1.1 threads and O-ring sealing:

- Part 1: Port with O-ring Seal in Truncated Housing
- Part 2: Heavy-Duty (S Series) Stud Ends
- Part 3: Light-Duty (L Series) Stud Ends

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2010 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
SAE WEB ADDRESS: <http://www.sae.org>

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J1926/3_201003**

These standards define performance requirements, dimensions, and designs for port and stud end connections for heavy-duty in Part 2 and light-duty in Part 3. Significant testing through 50 years of use has confirmed the performance requirements of these ports and stud ends. SAE J1926-3 stud ends originated with 37° flare connectors shown in SAE J514.

In fluid power systems, power is transmitted and controlled through a fluid (liquid or gas) under pressure within an enclosed circuit. In general applications, a fluid may be conveyed under pressure. Components are connected through their threaded ports by stud ends on fluid conductor fittings to tubes/pipes, or to hose fittings and hoses.

1. SCOPE

This part of SAE J1926 specifies dimensions, performance requirements, and test procedures for adjustable and nonadjustable light-duty (L series) stud ends with ASME B1.1 threads for use in fluid power and general applications and the O-rings used with them.

Stud ends in accordance with this part of SAE J1926 may be used at working pressures up to 35 MPa for nonadjustable and adjustable stud ends. The permissible working pressure depends upon materials, design, working conditions, application, etc.

For threaded ports and stud end specified in new designs for hydraulic fluid power applications, only ISO 6149 shall be used. Threaded ports and stud ends in accordance with ISO 1179, ISO 9974, and ISO 11926 shall not be used for new design in hydraulic fluid power applications.

Conformance to the dimensional Information does not guarantee rated performance. Each manufacturer shall perform testing according to the specification contained in this document to ensure that components made to this document comply with the performance rating.

Appendices A of this document is informative.

NOTE: This document specifies inch as well as metric hexes for the stud ends. Therefore, any product drawing specifying stud ends in accordance with this document must specify hex type, inch or metric, to assure getting intended hex.

Stud ends or parts specified before January 1, 2010 using this standard, shall be supplied with inch hexes, unless otherwise specified.

2. REFERENCES

(NOTE: Documents in this section have been rearranged to better classify them as either applicable or related)

2.1 Applicable Documents

The following standards contain provisions which, through reference in this text constitute provisions of this document. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this document are encouraged to investigate the possibility of applying the most recent edition of the standards indicated as follows. Members of IEC and ISO maintain registers of currently valid International Standards.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J515 Specification for O-ring Materials Used with Hydraulic Connectors

SAE J1926-1 Connections for General Use and Fluid Power—Ports and Stud Ends with ASME B1.1 Threads and O-ring Sealing—Part 1: Threaded Port with O-ring Seal in Truncated Housing

SAE J2593 Information Report for the Installation of Fluid Conductors and Connectors

2.1.2 ISO Publications

Available from American National Standards Institute, 25 West 43rd Street, New York, NY 10036-8002, Tel: 212-642-4900, www.ansi.org.

ISO 4759 -1 Tolerances for fasteners – General plan and selection for screws, bolts and nuts – Product grades A, B and C

ISO 5598 Fluid power systems and components – Vocabulary

ISO 19879 Metallic tube connections for fluid power and general use – Test methods for hydraulic fluidpower connections

2.1.3 ASME Publications

Available from American Society of Mechanical Engineers, 22 Law Drive, P.O. Box 2900, Fairfield, NJ 07007-2900, Tel: 973-882-1170, www.asme.org.

ASME B1.1 Unified Inch Screw Threads (UN and UNR Thread Form)

2.2 Related Publications

The following publications are provided for information purposes only and are not a required part of this document.

2.2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org

SAE J514 Hydraulic Tube Fittings

SAE J1926-2 Connections for General Use and Fluid Power—Ports and Stud Ends with ASME B1.1 Threads and O-ring Sealing—Part 2: Heavy-Duty (S Series) Stud Ends

SAE J1926-4 Connector for Fluid Power and General Use—Ports and Stud End with ASME B1.1 Threads and O-ring Seal—Part 4: External Hex and Internal Hex Inch Port Plugs—Dimensions, Design, Test Methods and Requirements

2.2.2 ISO Publications

Available from American National Standards Institute, 25 West 43rd Street, New York, NY 10036-8002, Tel: 212-642-4900, www.ansi.org.

ISO 48	Rubber, Vulcanized or thermoplastic—Determination of hardness (Hardness between 10 IRHD and 100 IRHD)
ISO 1101	Technical drawings—Tolerancing of form, orientation, location and run-out—Generalities, definitions, symbols, indications on drawings
ISO 1179-1 ¹	Connections for general use and fluid power—Ports and stud ends with ISO 228-1 threads with elastomeric and metal-to-metal sealing—Part 1: Threaded port
ISO 1179-2 ¹	Connections for general use and fluid power—Ports and stud ends with ISO 228-1 threads with elastomeric and metal-to-metal sealing—Part 2: Heavy duty (S series) and light duty (L series) stud ends with elastomeric sealing (type E)
ISO 1179-3 ¹	Connections for general use and fluid power—Ports and stud ends with ISO 228-1 threads with elastomeric and metal-to-metal sealing—Part 3: Light duty (L series) stud end with sealing by O-ring with retaining ring (types G and H)
ISO 1179-4 ¹	Connections for general use and fluid power—Ports and stud ends with ISO 228-1 threads with elastomeric and metal-to-metal sealing—Part 4: Stud end for general use only with metal-to-metal sealing (type B)
ISO 1302	Technical drawings—Method of indicating surface texture on drawings
ISO 6149-1	Connections for fluid power and general use—Ports and stud ends with ISO 261 threads and O-ring sealing—Part 1: Port with O-ring seal in truncated housing
ISO 6149-2	Connections for fluid power and general use—Ports and stud ends with ISO 261 threads and O-ring sealing—Part 2: Heavy duty (S series) stud ends—Dimensions, design, test methods and requirements
ISO 6149-3	Connections for fluid power and general use—Ports and stud ends with ISO 261 threads and O-ring sealing—Part 3: Light duty (L series) stud ends—Dimensions, design, test methods and requirements
ISO 6410-1	Technical Drawings – Screw threads and threaded parts – Part 1: General conventions
ISO 8434-2	Metallic tube connections for fluid power and general use – Part 2: 37° flared connectors
ISO 9974-1	Connections for general use and fluid power—Ports and stud ends with ISO 261 threads with elastomeric and metal-to-metal sealing—Part 1: Threaded port
ISO 9974-2	Connections for general use and fluid power—Ports and stud ends with ISO 261 threads with elastomeric and metal-to-metal sealing—Part 2: Stud end with elastomeric sealing (type E)
ISO 9974-3	Connections for general use and fluid power Ports and stud ends with ISO 261 threads with elastomeric and metal-to-metal sealing—Part 3: Stud end with metal-to-metal sealing (type B)
ISO 11926-3	Connections for general use and fluid power—Ports and stud ends with ISO 261 threads and O-ring sealing—Part 3: Light duty (L series) stud ends

¹ To be published

3. DEFINITIONS

For the purpose of this part of SAE J1926, the definitions given in ISO 5598 and the following shall apply.

3.1 ADJUSTABLE STUD END

A stud end connector that allows for fitting orientation before final tightening of the locknut to complete the connection. This type of stud end is typically used on shaped fittings (e.g., tees, crosses, and elbows).

3.2 NONADJUSTABLE STUD END

A stud end connector that does not require specific orientation before final tightening of the connection because it is only used on straight fittings.

4. STUD END

4.1 Size Designation

The stud ends shall be designated by SAE J1926-3 and the thread size, separated by a colon, for example, SAE J1926-3: 1/2-20. Products drawings specifying this stud end shall have the type of hex, inch or metric, listed.

4.2 Reduced Size Stud Ends for Jump Size Connectors

For jump size connectors where the hex size of the other end, e.g. tube/hose end, is larger than the stud hex "V" in Table 1, a shoulder may have to be turned to appropriate diameter and length to avoid interference with the port spot face. For details, see appropriate connector standard, e.g. SAE J514 (Sept. 2004), Table 26.

4.3 Assembly

For proper stud end assembly, follow instructions in SAE J2593.

5. REQUIREMENTS

5.1 Dimensions

Light-duty (L series) SAE J1926-3 stud ends shall conform to the dimensions in Figures 1A and 1B and Table 1. Hex tolerances across flats shall be according to ISO 4759-1 product grade C.

5.2 Working Pressure

Light-duty (L series) stud ends made of low-carbon steel shall be designed for use at the working pressures given in Table 2.

CAUTION: The pressures for sizes -40 (3-12 UN) -48 (3 ½-12) and -64 (4 ½-12) are based on limited number of burst test results. See note 1 under table 2.

5.3 Performance

Light-duty (L series) stud ends made of low-carbon steel shall meet or exceed the burst and impulse pressures given in Table 2 when tested according to 5.5.

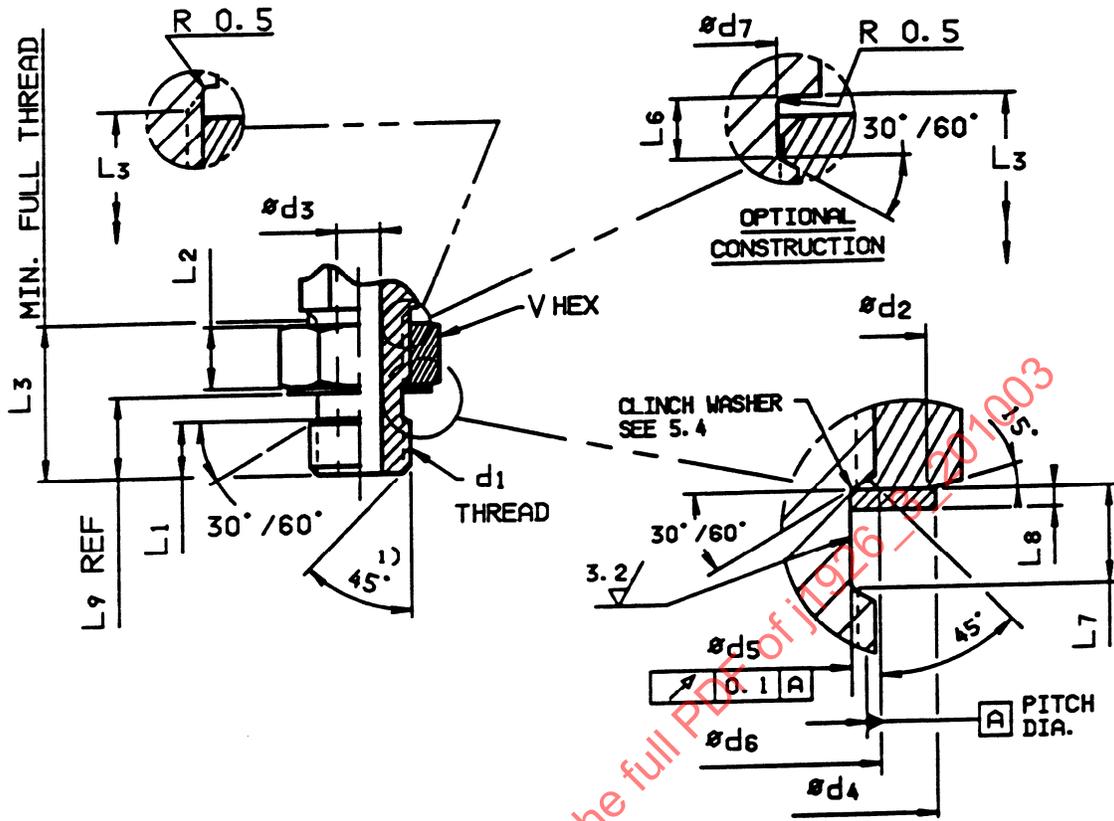


FIGURE 1A - ADJUSTABLE SAE J1926-3 LIGHT-DUTY (L SERIES) STUD END DETAIL

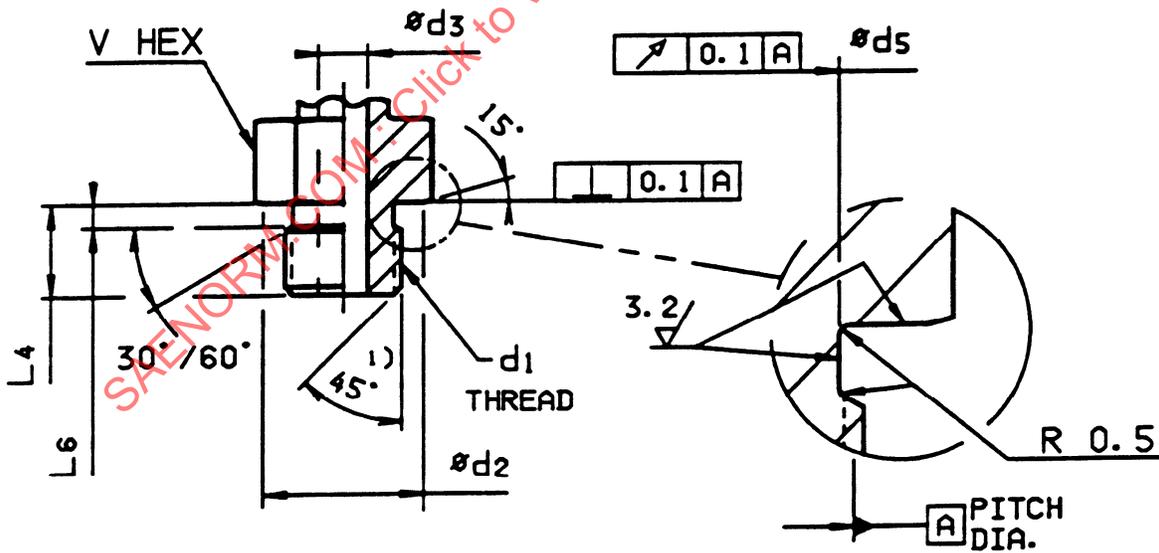


FIGURE 1B - NONADJUSTABLE SAE J1926-3 LIGHT-DUTY (L SERIES) STUD END DETAIL

1) CHAMFER TO MINOR DIAMETER OF THREAD

TABLE 1 - SAE J1926-3 LIGHT-DUTY (L SERIES) STUD END DIMENSIONS

Dimensions in millimeters												
Nominal Tube OD	Nominal Tube OD	Nominal Tube OD	Nominal Tube OD	$d_1^{(1)}$ Thread Size in	ϕd_2 ± 0.2 for Metric Hex	$\phi d_2^{(2)}$ ± 0.2 for Inch Hex	ϕd_3	Tol.	ϕd_4 ± 0.4	ϕd_5 $+0.05$ -0.08	ϕd_6 ± 0.2	ϕd_7 $+0$ -0.3
Inch Tubing Dash Size	Inch Tubing mm	Inch Tubing in	Metric Tubing mm									
-2	3.18	0.125	-	5/16-24	10 ⁽³⁾	10.9	1.6	± 0.1	12.8	6.35	8.3	6.4
-3	4.76	0.188	5	3/8-24	11.8	12.5	3.2	± 0.1	14.6	7.95	9.9	8
-4	6.35	0.250	6	7/16-20	13.8	14.1	4.4	± 0.1	16.5	9.25	11.5	9.3
-5	7.94	0.312	8	1/2-20	16.8	15.7	6	± 0.1	18.3	10.85	13	10.9
-6	9.52	0.375	10	9/16-18	16.9 ⁽⁴⁾	17.3	7.5	± 0.2	20.2	12.24	14.6	12.3
-8	12.70	0.500	12	3/4-16	22 ⁽⁵⁾	22	9.9	± 0.2	25.7	16.76	19.4	16.8
-10	15.88	0.625	16	7/8-14	26.8	25.3 ⁽⁶⁾	12.3	± 0.2	29.3	19.63	22.6	19.7
-12	19.05	0.750	20	1-1/16-12	31.8	31.5	15.5	± 0.2	36.7	24	27.3	24
-14	22.22	0.875	22	1-3/16-12	35.8	34.7	18	± 0.2	40.4	27.18	30.5	27.2
-16	25.40	1.000	25	1-5/16-12	40.8	37.9	21.5	± 0.2	44	30.35	33.7	30.4
-20	31.75	1.250	30	1-5/8-12	49.8	47.4	27.5	± 0.2	55	38.28	41.6	38.3
-24	38.10	1.500	38	1-7/8-12	54.8	53.8	33.5	± 0.3	62.3	44.6	48	44.6
-32	50.8	2.000	50	2 1/2-12	69.8	69.6	45	± 0.3	80.3	60.48	63.8	60.5
-40	63.5	2.500	-	3-12	84.8	82.4	65	± 0.3	93	73.2	76.5	73.2
-48	76.2	3.000	-	3 1/2-12	94.8	95.1	75	± 0.3	105	85.9	89.2	85.9
-64	101.6	4.000	-	4 1/2-12	119.8	120.5	100	± 0.3	131	111.3	114.6	111.3

SAENORM.COM : Click to view the full PDF of J1926-3-201003

TABLE 1 - SAE J1926-3 LIGHT-DUTY (L SERIES) STUD END DIMENSIONS (CONTINUED)

Dimensions in millimeters													
Nominal Tube OD	Nominal Tube OD	Nominal Tube OD	Nominal Tube OD	L ₁ ±0.2	L ₂ ±0.2	L ₃ min	L ₄ ±0.2	L ₆ ±0.15	L ₇ ±0.1	L ₈ ±0.08	L ₉ Ref	V ⁽⁷⁾⁽⁸⁾ Hex mm min	V ⁽²⁾⁽⁷⁾ Hex in min
Inch Tubing Dash Size	Inch Tubing mm	Inch Tubing in	Metric Tubing mm										
-2	3.18	0.125	-	5.9	5.6	15	7.5	1.75	3.3	0.8	8.4	10	11.11
-3	4.76	0.188	5	5.9	5.6	15	7.5	1.75	3.4	0.8	8.5	12	12.70
-4	6.35	0.250	6	7.1	7.1	18.5	9.1	2.05	4.1	0.9	10.3	14	14.29
-5	7.94	0.312	8	7.1	7.1	18.5	9.1	2.05	4.1	0.9	10.3	17	15.88
-6	9.52	0.375	10	7.9	7.1	19.5	10	2.25	4.1	0.9	11.1	17	17.46
-8	12.70	0.500	12	8.7	7.9	22.0	11.1	2.55	4.9	1	12.6	22	22.22
-10	15.88	0.625	16	10	9.1	25.5	12.7	2.85	5.7	1.25	14.4	27	25.40
-12	19.05	0.750	20	12	10.4	29.0	15.1	3.35	6	1.25	16.7	32	31.75
-14	22.22	0.875	22	12	10.4	29.0	15.1	3.35	6	1.25	16.7	36	34.93
-16	25.40	1.000	25	12	10.4	29.0	15.1	3.35	6	1.25	16.7	41	38.10
-20	31.75	1.250	30	12	10.4	29.0	15.1	3.35	6	1.25	16.7	50 ⁽⁹⁾	47.63
-24	38.10	1.500	38	12	10.4	29.0	15.1	3.35	6	1.25	16.7	55	53.98
-32	50.80	2.000	50	12	10.4	29.0	15.1	3.35	6	1.25	16.7	70	69.85
-40	63.5	2.500	-	14.5	12.5	34	17.5	4.2	6.5	1.5	19.5	85	82.55
-48	76.2	3.000	-	14.5	12.5	34	17.5	4.2	6.5	1.5	19.5	95	95.25
-64	101.6	4.000	-	14.5	12.5	34	17.5	4.2	6.5	1.5	19.5	120	120.65

TABLE 1 NOTES:

1. Thread sizes 3/8 thru 7/8 are UNF-2A and sizes 1-1/16 thru 4 1/2 are UN-2A.class.
2. Optional inch hex and related columns will be moved to Annex after 12/31/2012.
3. 15 degree chamfer is limited to 9.8/10.2 diameter to increase contact area at port face.
4. 15 degree chamfer is limited to 16.7/17.1 diameter to increase contact area at port face.
5. 15 degree chamfer is limited to 21.8/22.2 diameter to increase contact area at port face.
6. 15 degree chamfer is limited to 25.1/25.5 diameter to increase contact area at port face.
7. "V" hex is the minimum hex required for proper functioning of the straight thread O-ring port connection. It does not always control the connector hex. The connector hex is controlled by the larger of the minimum hex required for proper functioning of either end of the connector. Also see 4.2.
8. Stud ends or parts specified before January 1, 2010 using this standard, shall be supplied with inch hexes, unless otherwise specified.
9. Hex corners shall be turned to a diameter of 57 mm ± 0.2 mm to prevent possible interference with the port spotface diameter.

TABLE 2 - SAE J1926-3 LIGHT-DUTY (L SERIES) STUD END PRESSURES

Units in megapascals⁽²⁾

Thread Size in	Stud End Style Nonadjustable Working ⁽¹⁾ Pressure	Stud End Style Nonadjustable Test Pressure Burst	Stud End Style Nonadjustable Test Pressure Impulse ⁽³⁾	Stud End Style Adjustable Working ⁽¹⁾ Pressure	Stud End Style Adjustable Test Pressure Burst	Stud End Style Adjustable Test Pressure Impulse ⁽³⁾
5/16-24 UNF-2A	35	140	47	35	140	47
3/8-24 UNF-2A	35	140	47	35	140	47
7/16-20 UNF-2A	35	140	47	31.5	126	42
1/2-20 UNF-2A	35	140	47	31.5	126	42
9/16-18 UNF-2A	35	140	47	28	112	37
3/4-16 UNF-2A	31.5	126	42	28	112	37
7/8-14 UNF-2A	25	100	33	21	84	28
1 1/16-12 UN-2A	25	100	33	21	84	28
1 3/16-12 UN-2A	21	84	28	17.5	70	23
1 5/16-12 UN-2A	21	84	28	17.5	70	23
1 5/8-12 UN-2A	17.5	70	23	14	56	19
1 7/8-12 UN-2A	17.5	70	23	14	56	19
2 1/2-12 UN-2A	14	56	19	10.5	42	14
3-12 UN-2A	7	28	9.5	7	28	9.5
3 1/2-12 UN-2A	7	28	9.5	7	28	9.5
4 1/2-12 UN-2A	3.5	14	4.5	3.5	14	4.5

1. Pressure ratings for sizes up to 2 1/2-12 were established using fittings made of low-carbon steel and tested in accordance with 5.5. For sizes larger than 2 1/2-12, the ratings are based on a design factor of over 8 on limited number of burst tests using aluminum manifolds and low-carbon steel fittings.
2. To convert from MPa to bar multiply by 10. To convert from MPa to psi multiply by 145.04.
3. Cyclic endurance test pressure.

5.4 Adjustable Stud End Washer Fit and Flatness

The washer shall be clinched to the stud end with a tight slip fit to an interference fit. The slip fit shall be tight enough so that the washer cannot be shaken loose to cause it to drop from its uppermost position by its own weight. The locknut torque needed to move the washer at the maximum washer interference fit shall not exceed the torques given in Table 3.

Any washer surface that is out of flatness shall be uniform (i.e., not wavy) and concave with respect to the stud end and shall conform to the allowance given in Table 3.

TABLE 3 - ADJUSTABLE STUD END WASHER TORQUE AND FLATNESS ALLOWANCE

Thread Size in	Maximum Nut Torque to Move Washer N·m ⁽¹⁾	Maximum Washer Flatness Allowance mm
5/16-24 UNF-2A	2	0.25
3/8-24 UNF-2A	3	0.25
7/16-20 UNF-2A	4	0.25
1/2-20 UNF-2A	5	0.25
9/16-18 UNF-2A	7	0.25
3/4-16 UNF-2A	10	0.25
7/8-14 UNF-2A	12	0.25
1-1/16-12 UN-2A	15	0.40
1-3/16-12 UN-2A	18	0.40
1-5/16-12 UN-2A	20	0.40
1-5/8-12 UN-2A	25	0.50
1-7/8-12 UN-2A	30	0.50
2 1/2-12 UN-2A	40	0.50
3-12 UN-2A	50	0.50
3 1/2-12 UN-2A	60	0.50
4 1/2-12 UN-2A	80	0.50

1. To convert from N·m to lb·ft, multiply by 0.737.