

(R) Pneumatic Tire/Wheel/Runflat Assembly Qualifications for Military Tactical Wheeled Vehicles**RATIONALE**

This Standard was developed to serve as a guide to all branches of the Department of Defense to evaluate and measure tire/wheel/runflat systems and vehicle related performance. This revision is to update the information to reflect current state-of-the-art technology.

FOREWORD

This specification was developed by the SAE Truck and Bus Military Industry Tire Task Force and is intended for military use by all branches of the Department of Defense. It is designed to be used with the "Administrator's Manual for use with SAE J2014, (R) Pneumatic Tire/Wheel/Runflat Assembly Qualifications for Military Tactical Wheeled Vehicles", which contains the information needed to evaluate and measure tire/wheel/runflat systems and changes in vehicle performance. The Manual contains criteria by which a tire, wheel and/or runflat device will be judged as having passed or failed for these applications.

This specification shall remain open for comments and recommendations by the user(s) and shall be reviewed or revised periodically by the SAE Truck and Bus Military Industry Tire Task Force when necessary to incorporate adopted comments, recommendations, and advancements in government and industry tire technology.

1. SCOPE

This SAE Standard applies to all combinations of pneumatic tires, wheels, or runflat devices for military tactical wheeled vehicles only as defined in SAE J2013. This applies to original equipment and new replacement tires, retread tires, wheels or runflat devices.

This document describes tests and test methodology, which will be used to evaluate and measure tire/wheel/runflat system and changes in vehicle performance.

All of the tests included in this document are not required for each tire/wheel/runflat assembly. The Government Tire Engineering Office and Program Office for the vehicle system have the responsibility for the selection of a specific test(s) to be used. The selected test(s) should be limited to that required to evaluate the tire/wheel/runflat system and changes in vehicle performance. Selected requirements of this specification shall be used as the basis for procurement of a tire, wheel and/or runflat device for military tactical wheeled vehicles.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2013 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J2014_201303**

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J57	Sound Level of Highway Truck Tires
SAE J1015	Tonne Kilometer Per Hour Test Procedure
SAE J1269	Rolling Resistance Measurement Procedure for Passenger Car, Light Truck, and Highway Truck and Bus Tires
SAE J1441	Subjective Rating Scale for Vehicle Handling
SAE J2013	Military Tire Glossary
SAE J2181	Steady-State Circular Test Procedure for Trucks and Buses
SAE J2704	Tire Normal Force/Deflection and Gross Footprint Dimension Test

2.1.2 Military Publications

Available from the U.S. Army Tank Automotive Research Development Engineering Center (TARDEC), Tire Engineering RDTA-EN/TACT (MS-268), 6501 East 11 Mile Road, Warren, MI 48397-5000.

Administrator's Manual for use with SAE J2014, (R) Pneumatic Tire/Wheel/Runflat Assembly Qualifications for Military Tactical Wheeled Vehicles

Tire Operations Procedure (TOP) TOP-1-1-014 - Ride Dynamics

2.1.3 ASTM Publications

Available from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, Tel: 610-832-9585, www.astm.org

ASTM E 274	Standard Test Method for Skid Resistance of Paved Surfaces Using a Full Scale Tire
ASTM E 501	Standard Specification for Standard Rib Tire for Pavement Skid-resistance Tests
ASTM F1805	Standard Test Method for Single Wheel Driving Traction in a Straight Line on Snow and Ice-Covered Surfaces
ASTM F2803	Standard Test Method for Evaluating Rim Slip Performance of Tires and Wheels

2.1.4 Department of Transportation (DOT) Publication

Available from the United States Government Printing Office, 732 North Capitol Street, NW, Washington, DC 20401, Tel: 202-512-1800, www.gpoaccess.gov/cfr/retrieve.html.

Federal Motor Vehicle Safety Standard (FMVSS) Regulation 49CFR (Code of Federal Regulations) Part 571.119 New
Pneumatic Tires for Motor Vehicles with a GVWR of more than 4536 kilogram
(10,000 pounds) and motorcycles

2.1.5 European Tyre and Rim Technical Organization (ETRTO) Publications

Available from the European Tyre and Rim Technical Organization, Rue Defacqz 78/80, 1060, Brussels, Belgium, Tel: +32-2-344-40-59, www.etrto.org.

ETRTO Standards Manual

ETRTO Engineering Design Information

2.1.6 Japanese Automobile Tyre Manufacturers Association (JATMA) Publications

Available from the Japanese Automobile Tyre Manufacturers Association, No. 33 Mori Bldg. 8th Floor, 3-8-21 Toranomom, Minato-Ku, Tokyo, Japan, 105-0001, Tel: 81-3-3435-9094

JATMA Year Book

2.1.7 National Atlantic Treaty Organization (NATO) Publications

Allied Vehicle Testing Publications (AVTP) available from the Document Automation and Production Service (DAPS), Building 4/D, 700 Robbins Avenue, Philadelphia, PA 19111-5094, Tel: 215-697-6257, <http://assist.daps.dla.mil/quicksearch/>.

Dynamic Stability (AVTP-03-160W)

Tyre (AVTP-13-30W)

Facilities (AVTP-03-170)

2.1.8 Tire and Rim Association (TRA) Publications

Available from the Tire and Rim Association, 175 Montrose West Avenue, Suite 150, Copley, OH 44321, Tel: 330-666-8121, www.us-tra.org.

TRA Year Book

TRA Military Supplement

TRA Engineering Design Information

2.1.9 Unified Soil Classification System

See Technical Memorandum Number 3 357, April 1960 (Reprinted May 1957), and NATO Reference Mobility Model procedure available from U.S. Army Engineering Research Development Center (ERDC), Corps of Engineers, 3909 Halls Ferry Road, Vicksburg, MS 39180.

3. DEFINITIONS

Definitions for this document are included in SAE J2013.

4. TECHNICAL REQUIREMENTS

4.1 List of Tests and/or Inspections

A cross reference of inspections and tests for new and retreaded replacement tires is shown in Table 1.

TABLE 1 - TEST FOR NEW
AND RETREADED REPLACEMENT TIRES/WHEELS/RUNFLAT SYSTEMS

Title/Subject	SAE J2014 and Admin. Manual References	Test Procedure (Appendix A, Industry Test)
List of tests and/or Inspections	4.1	---
Mixed Fitment Testing	4.2	---
Retreadability	4.3.1	---
Repairability	4.3.2	---
Treadwear Indicators	4.3.3	---
Tire Imbalance Limits	4.3.4	---
Tire Traction	4.4.2	Section A.1
Vehicle Evasive Maneuver	4.4.3	Section A.2
Bead Unseating	4.4.4	Section A.3
Rolling Resistance	4.4.5	SAE J1269
Dimensional Criteria	4.4.6	---
Mechanical Reliability (Off-road Durability)	4.4.7	Section A.4
Tire Treadlife Durability	4.4.8	Section A.5
Comparative Stopping Distance	4.4.9	Section A.6
Tire Single Wheel Skid Resistance	4.4.10	ASTM E274
Rim Slip	4.4.11	ASTM F2803
Load Deflection	4.4.12	SAE J2704
Mission Profile Runflat	4.4.13	Section A.7
Paved Runflat	4.4.14	Section A.8
Curb Impact	4.4.15	Section A.9
Half Round	4.4.16	Section A.10
Absorbed Power Ride Quality	4.4.17	Section A.11
Mission Profile Speed Evaluation	4.4.18	Section A.12
High Speed Evaluation	4.4.19	Section A.13
Steady State Dynamic Stability	4.4.20	SAE J2181
Tire Underbody Impingement	4.4.21	Section A.14
Convoy Escort	4.4.22	Section A.15

4.2 Mixed Fitment Testing

Mixed fitment testing shall follow the standard fitment testing. If the standard fitment results indicate that a candidate tire/rim/runflat system does not qualify, then a mixed fitment evaluation is not necessary. The government program office shall work with the testing agency to determine the mixed fitment test scenarios.

Following the standard fitment, each group (including the reference if planned to be mixed with the candidates in the field) will be given a rank order rating starting with 1 being the best performing for a particular test.

Mixed fitment should consider the particular test and placement of the best performing and worst performing tires. An example of the test order is shown in the following table. An example for a handling test of a 2-axle vehicle with 3 candidate tires and 1 control tire:

Tire Placement (Tire Ranking)			
LF	RF	LR	RR
1	1	4	4
1	1	3	3
2	2	4	4
2	2	3	3

Additional mixed fitment testing can be conducted to include combinations left to right, opposing corners, or multiple different tires if so required.

The results for each mixed fitment will be compared to the reference standard fitment results. For pass/fail criteria, refer to the Administrator's manual.

4.3 Design and Construction – The Design and Construction of the tire/rim/runflat assemblies shall meet the description listed in the Administrator's manual.

4.3.1 Retreadability – (New tires only) The retreadability of the tires shall meet the description listed in the Administrator's manual.

4.3.2 Repairability – (New tires only) The repairability of the tires shall meet the description listed in the Administrator's manual.

4.3.3 Treadwear Indicators - The treadwear Indicators of the tires shall meet the description listed in the Administrator's manual.

4.3.4 Tire Imbalance Limits - The tire/rim/runflat assembly Imbalance Limits shall meet the description listed in the Administrator's manual.

4.4 Performance

4.4.1 The tire or retread, manufacturer provides certification that the tire meets the requirements listed in Table 1 of the Administrator's manual, before proceeding with the following testing.

4.4.2 Tire Traction

Purpose – This is a test to determine a tire's ability to withstand sustained operation on severe off-road conditions.

When specified, a tire traction test shall be conducted to determine traction performance of the tire(s) under specified conditions as described in Appendix A, Section A.1, to determine tire performance in mud, sand, and/or snow. For pass/fail criteria, refer to the Administrator's manual.

4.4.3 Vehicle Evasive Maneuver

Purpose – This test procedure is intended to be used as a field test procedure; however, the basic criteria are also intended to provide a standard reference for simulation of the basic maneuvers through various mathematical modeling techniques. This document provides a procedure and instructions for instrument and equipment, vehicle preparation, and test of single and combination vehicles. This procedure provides a method to evaluate the stability of vehicles under simulated highway conditions. Loss of stability is of primary concern.

When specified, a wet and dry pavement evasive maneuver test shall be conducted to determine the tires' performance under specified conditions as described in Appendix A, Section A.2, to determine tire performance on wet and dry pavement. For pass/fail criteria, refer to the Administrator's manual.

4.4.4 Bead Unseating

Purpose - A test method to determine tire slip, air loss or bead unseating when operated at the minimum recommended inflation pressure.

When specified, a bead unseating test shall be conducted as described in Appendix A, Section A.3. For pass/fail criteria, refer to the Administrator's manual.

4.4.5 Rolling Resistance

Purpose – This procedure applies to the laboratory measurement of rolling resistance of pneumatic passenger car, light truck, and highway truck and bus tires. The procedure applies only to the steady-state operation of free-rolling tires at zero slip and inclination angles.

When specified, to determine conformance to this section, a rolling resistance test shall be conducted in accordance with SAE J1269. For pass/fail criteria, refer to the Administrator's manual.

4.4.6 Dimensional Criteria

Purpose – The purpose of these procedures are to compare the candidate tire, wheel or runflat dimensions with the control tire, wheel or runflat.

4.4.6.1 Tire: When specified, the following measurements of the candidate tire shall be compared to the reference/control: overall diameter, section width, tire weight, centerline tread depth, tread width, revolutions per mile, and bead width. Tire measurements shall be taken at rated inflation pressure. A minimum sample size of 4 shall be recorded with average reported. Revolutions per mile shall be taken at the rated inflation pressure and load for the tire, unless otherwise specified. A minimum of 3 runs shall be recorded for the Revolutions per mile. As an option, a clearance check of the tire on the vehicle may be performed.

4.4.6.2 Rim/Wheel: When specified, the following measurements of the candidate wheel shall be compared to the reference/control. A minimum sample size of 4 shall be recorded with average reported. As an option, a clearance check of the wheel on the vehicle may be performed. As an option, compatibility of the runflat or tire or hub with the wheel may be performed for fitment (mounting trial). The rim contour must conform to TRA, ETRTO or JATMA standards for the control wheel.

4.4.6.2.1 Rim Characteristics: Flange Height; Flange Width; Bead seat width, diameter, angle; valve hole diameter, position (location), hole depth, wall angle; drop well position, width, depth, diameter.

4.4.6.2.2 Disc Characteristics: Mounting surface diameter; disc thickness at hub/stub; bolt hole diameter (mounting number and assembly number); bolt circle diameter

4.4.6.2.3 Wheel Characteristics: Weight, offset, center-hole diameter.

4.4.6.3 Runflat - When specified, the following measurements of the runflat shall be compared to the reference/control runflat: outside diameter, inside diameter, overall width, runflat cap width, bead lock dimensions (if applicable), minimum clearance with valve when mounted on wheel. A minimum sample size of 4 shall be recorded with average reported. As an option, compatibility of the wheel or tire or valve with the runflat may be performed for fitment (mounting trial).

For pass/fail criteria, refer to the Administrator's manual

4.4.7 Mechanical Reliability (Off-road Durability)

Purpose – This is a test to determine a tire/wheel/runflat's ability to withstand sustained operation on severe off-road conditions.

When specified, testing shall be conducted as described in Appendix A, Section A.4, for the tire/wheel/runflat system durability in an off-road conditions. For purposes of this specification, a road hazard, such as a nail puncture through the tread area will be repaired using commonly accepted practices of the industry. A road hazard that cannot be repaired will not be counted against the candidate tire. Road hazards are defined as repairable or non-repairable penetration(s) resulting in air loss or cutting or penetrating damage to the casing from man-made debris on the roadway (such as nails, staples, bolts, screws, glass, metal fragments, wire, fencing material, etc.) Specifically excluded from this definition are natural materials 100 mm (4 in) or less that may either deliberately or accidentally been placed in the roadway (such as stones or rocks). For pass/fail criteria, refer to the Administrator's manual. To determine conformance, testing shall be conducted in accordance with the procedures described in Appendix A, Section A.4.

4.4.8 Tire Treadlife Durability

Purpose – This is a test to determine the tire/wheel/runflat assembly system's(s') treadlife durability using the vehicle mission profile requirements.

When specified, To assure conformance to the treadlife durability requirements, the test shall be conducted on the courses required for the mission profile as specified on the original equipment or a revised mission profile requirement and in accordance with Appendix A, Section A.5. For pass/fail criteria, refer to the Administrator's manual.

4.4.9 Comparative Stopping Distance

Purpose – This on-vehicle test is used to compare the stopping distance of the reference/control and candidate tire.

When specified, testing shall be conducted in accordance with Appendix A, Section A.6. For pass/fail criteria, refer to the Administrator's manual.

4.4.10 Tire Single-Wheel, Skid Resistance

Purpose – This test method establishes the standard procedure for measuring the skid resistance of paved surfaces by the use of a specified full-scale automotive tire. This test method utilizes a measurement representing the steady-state friction force on a locked test wheel as it is dragged over a wetted pavement surface under constant load and at a constant speed while its major plane is parallel to its direction of motion and perpendicular to the pavement. The values measured represent the frictional properties obtained with the equipment and procedures stated herein. These values are intended for use in evaluating the skid resistance of a pavement relative to that of other pavements or for evaluating changes in the skid resistance of a pavement with the passage of time.

When specified, a single-wheel, tire skid resistance test shall be conducted using procedures as established in ASTM E274. The vehicles, loads, inflation pressures, and tires shall be adjusted to tactical military tire requirements. This test shall be conducted on wet pavement at 64 km/h (40 mph). An ASTM E501 tire shall be used to define the test surface. This is the recommended procedure for evaluating tire braking performance, versus 4.9.

4.4.11 Rim Slip

Purpose – This test method is performed to determine the amount of rotational slip occurring at the tire/wheel interface while under heavy longitudinal load conditions. This test method is suitable for research and development purposes where tires are compared during a single series of tests. They may not be suitable for regulatory statutes or specification acceptance because the values obtained may not necessarily agree or correlate either in rank order or absolute performance level with those obtained under other environmental conditions on other surfaces or the same surface after additional use.

When specified, the tire/rim/runflat assembly shall be tested in accordance with ASTM F2803. For pass/fail criteria and requirements for each vehicle application, refer to the Administrator's manual.

4.4.12 Load Deflection

Purpose – This test is a method for determining the vertical force and deflection properties of a non-rolling tire and the associated contact patch length and width. The method applies to any tire so long as the equipment is properly scaled to conduct the measurements for the intended test tire. The data are suitable for use in determining parameters for road load models and for comparative evaluations of the measured properties in research and development.

When specified, testing shall be conducted in accordance with SAE J2704 "Tire Normal Force/Deflection and Gross Footprint Dimension Test" using loads and inflation pressures appropriate for the vehicle mission. Inclusion of the runflat device in the wheel assembly is optional. The load and deflection shall be tabulated to determine the spring rate for each tire. The percent deflection shall be calculated using the section height minus the rim flange height.

4.4.13 Mission Profile Runflat

Purpose – The purpose of the mission profile Runflat test is to ensure that the tire/wheel/ runflat assembly can withstand rifle fire and allow continuous mobility of the vehicle for a specified distance, speed, and terrain type.

When specified, testing shall be conducted in accordance with Appendix A, Section A.7. For pass/fail criteria, refer to the Administrator's manual.

4.4.14 Paved Runflat

Purpose – The purpose of the Paved Runflat test is to ensure that the tire/wheel/runflat assembly can withstand rifle fire and allow continuous mobility of the vehicle over a paved surface for 30 miles at 30 mph. This test is also used to determine the deflated system's thermal relationship at the tire-runflat interface and its ability to withstand a minimum of 30 miles of operation.

When specified, testing shall be conducted in accordance with Appendix A, Section A.8. For pass/fail criteria, refer to the Administrator's manual.

4.4.15 Curb Impact

Purpose – The purpose of this test is to evaluate if the candidate component adversely affects the vehicle occupants' health and/or comfort and to establish whether or not the candidate prematurely degrades the tire, after impacting an 8-inch curb at a 0° and 45° angle of approach.

When specified, testing shall be conducted in accordance with Appendix A, Section A.9. For pass/fail criteria, refer to the Administrator's manual.

4.4.16 Half Round

Purpose – The objective of half round testing is to determine a candidate assembly's effects on the vehicle's suspension while driving over 6-, 8-, 10- or 12-inch half round obstacles. Half round performance is determined by calculating the maximum speed the vehicle can traverse the obstacle before achieving 2.5 g's of peak vertical acceleration at the driver's seat or CG location. TOP 1-1-014 defines the 2.5 g's as the maximum allowable acceleration without posing significant risk to occupant health and safety.

When specified, testing shall be conducted in accordance with Appendix A, Section A.10. For pass/fail criteria, refer to the Administrator's manual.

4.4.17 Absorbed Power Ride Quality

Purpose – The objective of the ride quality test is to determine if there is any adverse ride, handling or stability characteristics attributable to the candidate assembly. Ride quality performance is quantified by determining the maximum speed the vehicle can traverse a repetitive roughness course, before achieving six (6) watts of absorbed power at the base of the driver's seat. TOP 1-1-014 defines six (6) watts as the maximum sustainable absorbed power the human body can endure for eight hours before injury and/or physical damage occur.

When specified, testing shall be conducted in accordance with Appendix A, Section A.11. For pass/fail criteria, refer to the Administrator's manual.

4.4.18 Mission Profile Speed Evaluation

Purpose – The objective of the Mission profile Speed Evaluation test is to determine if there are any adverse ride, handling or stability characteristics attributable to the candidate assembly.

When specified, testing shall be conducted in accordance with Appendix A, Section A.12. For pass/fail criteria, refer to the Administrator's manual.

4.4.19 High Speed Evaluation

Purpose – The objective of high speed testing is to investigate the effect of combined vibration and environmental forces on the candidate assemblies.

When specified, testing shall be conducted in accordance with Appendix A, Section A.13. For pass/fail criteria, refer to the Administrator's manual.

4.4.20 Steady State Dynamic Stability

Purpose – This test procedure is used to determine the steady-state directional control response of vehicles by measuring steady-state cornering behavior. Due to the wide range of operational conditions to which a vehicle can be subjected, the results of this testing do not provide a complete description of a vehicle's total dynamic behavior; in particular, the procedure does not test the vehicle's response during transient maneuvers. To fully assess a vehicle's total dynamic behavior, it would be necessary to conduct other test procedures in order to evaluate the vehicle's performance as a whole. The extent of instrumentation and the required accuracy of the measurement will be dependent on the goals of the personnel conducting the test. If it is desired simply to determine the general performance characteristics of a vehicle, then this test can be conducted with minimal instrumentation and test item preparation. This test establishes a uniform procedure for determining the steady-state directional control response of trucks, buses, and combination vehicles.

When specified, testing shall be conducted in accordance with SAE J2181 Steady-State Circular Test Procedure for Trucks and Buses. Results shall be graphed as shown in SAE J2181 Appendix C Figure C1. Each candidate tire/rim/runflat system group shall be tested and compared to the reference/control to determine any changes in handling characteristics. Mixed fitment and tests at different weight up to and including maximum test weight are recommended. For pass/fail criteria, refer to the Administrator's manual.

4.4.21 Tire Underbody Impingement

Purpose – This is a vehicle-specific tire test that evaluates the potential for destructive impingement of tires on underbody structures. The test imposes full lock steer at full jounce. The test also imposes full rebound at full lock steer, testing the strain relief design of hoses and cables attached to the tire/wheel, e.g. Central Tire Inflation System (CTIS).

When specified, the test is shown in Appendix A, Section A.14.

4.4.22 Convoy Escort

Purpose - This test procedure is intended to evaluate the thermal durability of a tire operating non-stop at a constant high speed for one tank of fuel on a paved road at high ambient temperature.

When specified, testing shall be conducted in accordance with Appendix A, Section A.15. For pass/fail criteria, refer to the Administrator's manual.

5. NOTES

5.1 Marginal Indicia

A change bar (l) located in the left margin is for the convenience of the user in locating areas where technical revisions, not editorial changes, have been made to the previous issue of this document. An (R) symbol to the left of the document title indicates a complete revision of the document, including technical revisions. Change bars and (R) are not used in original publications, nor in documents that contain editorial changes only.

PREPARED BY THE SAE TRUCK AND BUS MILITARY INDUSTRY TIRE TASK FORCE OF THE SAE TRUCK AND BUS TIRE COMMITTEE

APPENDIX A - TESTS

A.1 TIRE TRACTION TEST (Ref: clause 4.4.2)

This test determines the driving traction performance of the tire(s) relative to the reference/control tire tested under similar specified conditions.

A.1.1 Purpose

The driving traction performance of the reference/control tire shall be used as a basis to compare the performance of the candidate tire(s). Tests shall be conducted on one or more of the surface conditions (mud, sand, and snow) for both the reference/control and candidate tire tests. Desired surface conditions shall be selected in advance of the testing. Test results shall be used to determine the tractive coefficient¹ of both the reference/control tire and candidate tire. The tractive coefficient from the tests shall be comparatively evaluated. One of two (2) test methods is used for this determination: 1) the single-wheel traction test; or 2) the drawbar pull test. The single-wheel traction test is the preferred method. Drawbar pull tests may be used when single-wheel traction testing is not available.

A.1.2 Facilities

Tests shall be conducted on courses prepared to the following specifications:

A.1.2.1 Soil Tests

At least two (2) courses for each selected condition shall be required to provide a large enough area to accommodate testing. The test sections shall be uniform, level, relatively smooth, with no vegetation, a minimum of twice the tire's section width by 150 m (500 ft) long for single wheel tests and 6 m (20 ft) wide by 90 m (300 ft) long for drawbar tests. Prior to testing, the courses shall be prepared to a uniform depth and strength and exhibit no evidence of previous usage. Cone penetrometer measurement(s) shall be taken in a crosshatch pattern not exceeding 3 m (10 ft) to determine uniformity of compaction. Soil samples shall be collected at three (3) locations in the test courses at the surface, and 150 mm (6 in) in depth.

A.1.2.2 Fine-Grained Soil (Mud)

This test section shall be constructed of silt (ML-as defined by Unified Soil Classification System (USCS)). The depth of the ML soil shall be at least 750 mm (30 in) and compacted to provide a cone index of at least 300 throughout the soil profile prior to wetting. Before the start of the tests on each course, an amount of water that simulates 13 mm (0.5 in) of rainfall shall be sprayed uniformly over the course. A 5-min waiting period shall be observed between the end of wetting and the start of traction testing, and testing shall be completed within 15 min of water application. Each test shall be conducted on untracked material. Soil moisture content shall be determined at three (3) locations in the test section at 0 mm to 25 mm (0 in to 1 in), 25 mm to 75 mm (1 in to 3 in), and 75 mm to 150 mm (3 in to 6 in) depths.

A.1.2.3 Coarse-Grained Soil (Sand)

This test section shall be constructed of sand (SP-as determined by USCS). The depth of the SP soil shall be at least 750 mm (30 in), tilled to at least 200 mm (8 in), and dried to a moisture content of less than 2.0% in the top 75 mm (3 in) of sand. The cone index at the 75 mm (3 in) depth shall not exceed 100.

¹ Tractive coefficient is defined as the longitudinal force from the tire divided by vertical load.

A.1.2.4 Snow

A sufficient amount of snow shall be compacted such that a first untracked pass of the test exhibits a sinkage of at least one tread depth. If compaction or grooming is necessary to obtain the required snow surface, the test course can be aged before testing begins. Temperatures at 25 mm (1 in) below the test surface shall be between -12°C ($+10^{\circ}\text{F}$) and -4°C ($+25^{\circ}\text{F}$). Each test shall be conducted in a fresh test surface. Snow course preparation is extremely critical for obtaining valid results. Course preparation and snow compaction measurements using CTI snow compaction gauge are made as specified in ASTM F1805. The Standard Reference Test Tire (SRTT) (Specification E 1136) shall be used to monitor course conditions in accordance with ASTM F 1805 ensuring compliance with the specified range of 6.3 mm (0.25 in) – 10.4 mm (0.41 in) for medium pack snow.

A.1.3 Test Vehicle

A.1.3.1 Single Wheel Tests

A test bed capable of providing single, driven tire traction shall be equipped with an instrument package capable of measuring the longitudinal and vertical wheel forces as well as the velocity of the test wheel and ground speed. The capability of logging of the data at a minimum sampling rate of ten (10) samples per second (s) is required. The driving test tire shall be positioned to eliminate the test tire tracking another tire through the test course.

A.1.3.2 Drawbar Pull Tests

The appropriate tactical test vehicle shall be equipped with the reference/control or candidate tire(s) in all wheel positions. The test vehicle shall be run together with a dynamometer vehicle of adequate size and load to permit controlling the test vehicle speed. The connection between the vehicles shall be a cable or a tow bar parallel to the ground containing a load cell capable of measuring the drawbar force. Instrumentation recording the drawbar force, time, wheel speed(s), and ground speed shall be installed in the dynamometer vehicle. Sampling rate for the previous measurements shall be a minimum of 10 samples per second (s).

A.1.4 Instrumentation

A.1.4.1 Longitudinal and vertical forces on the test, along with test wheel and vehicle speeds, shall be measured within 2% accuracy as established by annual National Institute of Standards Technology (NIST) traceable calibration.

A.1.4.2 Cone Penetrometer

Refer to ASTM F1805, for the method. Use the CTI snow compaction gauge as identified in ASTM F1805. Refer to the NATO Reference Mobility Model procedure for instructions for the use of the cone penetrometer.

A.1.5 Preparation for Tests

A.1.5.1 All transducers and instrumentation must be calibrated according to recognized procedures.

A.1.5.2 Tires

Two (2) new tires for the single wheel tests and two (2) new tires for each tire position for the drawbar test shall be recommended as test samples for each variable. These samples shall be production tires (or pre-production), inspected by the tire/retread manufacturer to be free of anomalies and conforming to applicable standards of manufacture. The tires shall be free of mold flash, lubricants, and shall have tread labels removed. In addition, test and reference/control tires shall not have any force or run-out grind.

A.1.5.3 Rim/Wheels

The tires shall be mounted on rim/wheels specified in the TRA Yearbook, and/or Military Supplement and/or Engineering Design Information, or ETRTO Standards Manual for the size being tested, unless the military specification requires a rim/wheel that differs from the TRA Military Supplement recommendation. In the latter case, the military specification will apply. Rims must be compatible with pressure and the test vehicle. Inspect and measure test rims to assure they comply with the applicable rim standard (Ref: 4.4.6.2).

A.1.5.4 Inflation Pressure

Tire pressures shall be per the applicable technical manual based on the mission profile (unless otherwise specified).

A.1.5.5 Break-In

An initial break-in period of 160 km (100 mile), shall be run at the maximum vehicle speed not to exceed 90 km/h (55 mph) on a dry, paved surface at the highway inflation pressure.

A.1.5.6 Initial Tire Measurements

The tires shall be inspected and measured following the break-in. Measurements shall be at three (3) locations around the periphery of each tire and shall include: tread depth at crown and shoulders, section width, tread radius, tread arc width, and outside diameter.

A.1.6 Test Procedure

A.1.6.1 Test Tire/Wheel/Runflat Assembly Preparation - Operate electronic test equipment as required for stabilized results.

A.1.6.2 Test Tire/Wheel/Runflat Assembly Temperature- must be stabilized at ambient temperature and shielded from direct sunlight before testing.

A.1.6.3 Test Tire/Wheel/Runflat Assembly Load- The test vehicle shall be loaded so that each individual static test tire load(s) is within +5% of the maximum tire load for the intended vehicle (unless otherwise specified). The single wheel tests shall measure the average dynamic tire load for a series of test runs for calculation of tractive coefficients.

A.1.6.4 Inflation Pressure Adjustment - Adjust air inflation pressure immediately before testing to the specified test inflation pressure from +7 to 0 kPa (+1 to - 0 psi).

A.1.6.5 Test Tire/Wheel/Runflat Assembly Identification - Record tire identification and other data, including date, time, ambient temperature, test surface temperature, type of test surface, etc.

A.1.6.6 Single Wheel Method

The test vehicle shall be equipped with either the reference/control or candidate tires, and the load adjusted to the static load requirement. Operation shall be at a ground speed of 8 km/h (5 mph) \pm 0.8 km/h (\pm 0.5 mph) driven by the test wheel and controlled by the action of the operator on the brakes of the non-test wheels. The vehicle shall enter the test area, and the operator engages a throttle actuator while maintaining a ground speed of 8 km/h (5 mph) \pm 0.8 km/h (\pm 0.5 mph). The actuator shall be adjustable to allow at least 1.5 s for a wheel-speed acceleration from 4 km/h to 25 km/h (2.5 to 15 mph). Testing will be conducted with a control tire at the beginning and end of each test sequence or test matrix and every third test in between. A minimum of ten (10) of these spin-ups shall be made with each test sample and control tire with a coefficient of variation of less than 5 for sand/pavement/snow, and less than 15 for mud.

A.1.6.7 Drawbar Method

For each test, the test vehicle shall be positioned outside the test course and immediately in front of and connected to the dynamometer vehicle with a cable or drawbar. The test vehicle shall operate in the lowest gear for a ground speed of approximately 4 km/h (2.5 mph) at its optimum engine rpm for maximum torque and proceed into the test course lane with no load on the drawbar. Load shall be gradually applied to the drawbar by the dynamometer operator, increasing the power required by the test vehicle to maintain a constant engine rpm. The test vehicle progresses in steps from a zero or no load slip condition to a high load/max slip condition. Immediately following completion of the first test, the vehicles shall be repositioned at the beginning of the test lane offsetting the tracks of the prior test(s). A minimum of three (3) drawbar tests shall be conducted.

A.1.7 Test Results

A.1.7.1 Single Wheel Tests

Both tabular and graphical data from the ten runs shall be obtained expressing the tractive coefficient of the reference/control tire and the candidate tires as a function of slip velocity. The mean peak tractive coefficient shall be shown as well as the area of the traction curve from 2 km/h to 16 km/h (1 mph to 10 mph) slip velocity. A statistical analysis showing standard deviation and coefficient of variation of the peak and area for the group of runs is also made. The mean coefficient of friction shall be calculated using the method described in ASTM F 1805. The candidates shall be compared to the reference tire using the gradient traction performance index (TPI) described in ASTM F 1805.

A.1.7.2 A.1.7.2 Drawbar Test

Traction in terms of tractive coefficient at various slip values for each test shall be obtained from the test records and plotted as tractive coefficient versus percent wheel slip ($(\text{wheel speed} - \text{ground speed})/\text{ground speed} \times 100$). A line of best fit shall be drawn through the data to produce the performance curve for each test condition. The highest tractive coefficient value between zero and 90% slip from the performance curve shall be determined from the tests. Values for candidate tires and reference/control tires for the same surface condition shall be used to compare tire performance, with candidate tires rated as a percentage of the reference/control tire performance.

SAENORM.COM : Click to view the full PDF of J2014 Revised MAR2013

A.2 VEHICLE EVASIVE MANEUVER TEST (REF: CLAUSE 4.4.3)

A.2.1 Purpose

This test procedure is intended to be used as a field test procedure; however, the basic criteria are also intended to provide a standard reference for simulation of the basic maneuvers through various mathematical modeling techniques. This document provides a procedure and instructions for instrument and equipment, vehicle preparation, and test of single and combination vehicles. This procedure provides a method to evaluate the stability of vehicles under simulated highway conditions. Loss of stability is of primary concern.

A.2.2 Facilities

A.2.2.1 The course shall be flat, level (not to exceed 1% grade) concrete or blacktop, large enough to contain the course shown in Figure A1. Adequate acceleration and deceleration lanes and an adequate safety zone on each side of the course are also required. When performing the wet evasive maneuver, the surface shall be wetted by external means either with a watering truck or sprinkler trickle watering system. The water depth shall not to exceed 1 mm (0.05 in). In any case, there shall be no dry spots on the test course immediately prior to and during the test. Repeating the test on a gravel surface is optional depending on the vehicle mission profile.

A.2.2.2 The test surface shall be free from any loose material and have a surface coefficient of 0.7 or greater.

A.2.2.3 The wind velocity shall not exceed 16 km/h (10 mph) and both velocity and direction shall be recorded in the test results.

A.2.2.4 Calculation of Test Course Dimensions

Refer to Figure A1 for course calculations.

A.2.2.5 The test may be repeated on a gravel surface depending on the vehicle mission profile

A.2.3 Test Vehicle

A.2.3.1 Vehicles to be tested shall be serviced in accordance with manufacturers' recommended procedures.

A.2.3.2 Payloads shall be loaded and secured to obtain Gross Vehicle Weight (GVW) in accordance with normal military practice. Additional testing with abnormal payloads should be considered (i.e., loads with high center of gravity, live loads, such as partially-full tank trucks, etc.). It is strongly recommended that reasonable loads of these types be investigated to assure stable operation under normal usage. In particular, van bodies should be loaded with a payload distributed throughout the van interior such that the center of gravity of the payload is in the center of the van volume vertically, transversely, and longitudinally. Consideration should be given to testing with representative "worst case loads" with the load off-center transversely.

A.2.4 Instrumentation

A.2.4.1 A calibrated device shall be used to measure vehicle speed ± 0.3 km/h (± 0.2 mph).


A.2.5 Test Preparation

A.2.5.1 NATO recommended pylons and dimensions are applicable. (see Figure A-1). Vertical pylons of expendable or deformable material shall be used to mark the course as indicated by the "dots" on Figure A1. Pylons shall be sufficiently high to assure visibility to the driver and without contacting the pylon.

NATO UNCLASSIFIED
A-1

AVTP : 03-160 W
EDITION No. : FINAL
DATE : SEP. 1991

ANNEX A

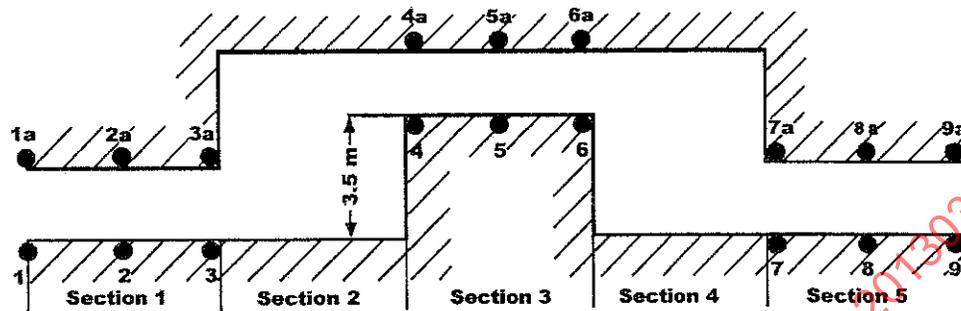

Lane - change track dimensions

Section 1 : Length = 15 m

Width = 1.1 vehicle width + 0.25 m

Section 2 : Length = Overall length of vehicle^{*)} + 24 m

Section 3 : Length = 25 m

Width = 1.2 vehicle width + 0.25 m

Section 4 : Length = Overall length of vehicle + 24 m

Section 5 : Length = 15 m

Width = 1.1 vehicle width + 0.25 m

^{*)} Overall length of vehicle, measured at 0.50 m from the ground.

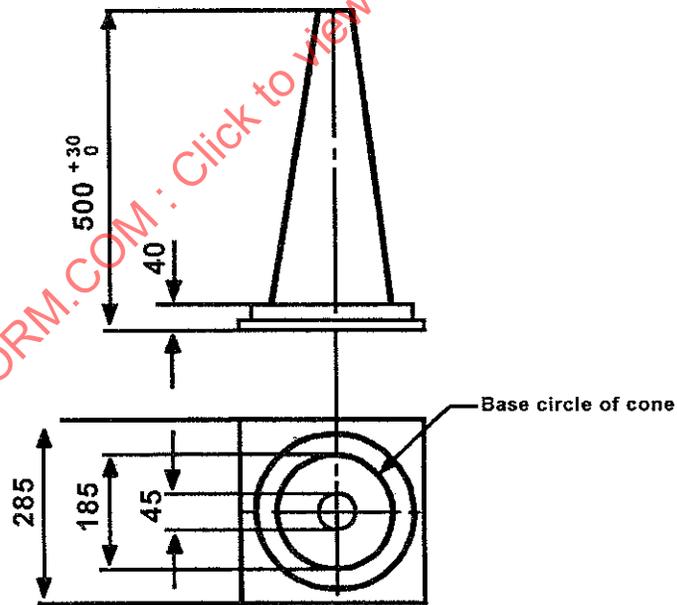


FIGURE A1 - COURSE LAYOUT AND CONE DIMENSIONS (MM)

A.2.6 Test Procedure

A.2.6.1 Maximum Test Speed - The vehicle shall be driven by a competent test driver well trained and thoroughly familiar with the test vehicle. Successive trials shall be conducted through the test course at gradually increasing speeds to determine the maximum constant speed at which the vehicle (or vehicle combination) can negotiate the course, without contacting any of the pylons or other loss of control. Testing to begin at a target speed of 32 km/h (20 mph). Increase the speed of each run by 8 km/h (5 mph) increments until the operators experience indicates the speed is near end limit. As the speed approaches end limit the speed is increased in 2 mph increments until the end limit speed has been determined. Repeat runs shall be made until the test director is satisfied that the maximum speed has been defined within ± 3 km/h (± 1.5 mph). The test driver shall be permitted to call any run invalid based solely on his/her judgment.

A.2.6.2 Observers - Observers shall be stationed to:

- a. Observe all wheels of the vehicle(s) in order to note any "lift-off," and
- b. Observe any contact between the vehicle and the pylons.

A.2.6.3 Testing shall include mixed fitment (candidate & reference tires) on same vehicle when applicable to address loss of stability concerns (See 4.2).

A.2.7 Test Results

A.2.7.1 Vehicle Configuration

The configuration of each vehicle payload combination tested shall be recorded in the format shown in Figure A2. (Additional columns should be added as needed for vehicle combinations consisting of more units.) Payload center of gravity and moments of inertia are desirable when available. When these detailed data are not available, a full description of the payload shall be included and as a minimum the individual axle loads shall be recorded for each payload configuration.

For each test run, the data in Figure A3 shall be recorded

A.2.7.2 Required Data- the results shall include:

- a. Average Speed: km/h (mph).
- b. Cone Contact for each run (if any)
- c. Area of vehicle that made contact with cone(s).
- d. Wind Speed: km/h (mph)
- e. Wind Direction
- f. Ambient and surface temperature: °C (°F)

Configuration code (for cross-reference) _____

Vehicle Description:

Truck/Tractor Trailer/Semi-Trailer

Make: _____ Make: _____

Model: _____ Model: _____

Year Mfr'd: _____ Year Mfr'd: _____

Serial No.: _____ Serial No.: _____

Weight as tested: _____ Weight as tested: _____

Wheelbase: _____ Wheelbase: _____

Axle Loading: Note axle type in heading (i.e. steer, drive, steer/drive, or tag)

	Axle 1 – Type _____	Axle 2 – Type _____	Axle 3 – Type _____	Axle 4 – Type _____
Suspension Type				
Axle Rating				
Actual Left Load				
Actual Right Load				
OR				
Total Load				

Continued	Axle 5 – Type _____	Axle 6 – Type _____	Axle 7 – Type _____	Axle 8 – Type _____
Suspension Type				
Axle Rating				
Actual Left Load				
Actual Right Load				
OR				
Total Load				

Payload narrative description:

Centers of gravity (estimate if actual not available)

Truck (x): _____ Truck payload (x): _____ Truck with payload (x): _____

Truck (y): _____ Truck payload (y): _____ Truck with payload (y): _____

Truck (z): _____ Truck payload (z): _____ Truck with payload (z): _____

Trailer (x): _____ Trailer payload (x): _____ Trailer with payload (x): _____

Trailer (y): _____ Trailer payload (y): _____ Trailer with payload (y): _____

Trailer (z): _____ Trailer payload (z): _____ Trailer with payload (z): _____

x = longitudinal y = transverse z = vertical

FIGURE A2 - DESCRIPTIVE INFORMATION

Date: _____ Wind velocity: _____ Direction: _____ Friction coefficient: _____

Configuration code: _____ Run number: _____ Direction: _____ Start from right or left: _____

Section dimensions: (1) _____ (2) _____ (3) _____

(4) _____ (5) _____

Average Vehicle speed at entry: _____ Average Vehicle speed at exit: _____

Pylons displaced (record area/number): Entry ____ / ____ : Straightaway ____ / ____ : Exit ____ / ____

Wheel lift-off observed: _____

Comments: _____

FIGURE A3 - TEST DATA

SAENORM.COM : Click to view the full PDF of j2014_201303

A.3 BEAD UNSEATING TEST (Ref: clause 4.4.4)

A.3.1 Purpose

A test method to determine tire slip, air loss or bead unseating when operated at the minimum recommended inflation pressure.

A.3.2 Facilities

The test course layout shall have an equal radius “figure 8” configuration of predetermined asymmetrical curvatures on a level-graded surface within 0.5% grade. Numbers 1 thru 8 indicate the position of the pylons. Pylon dimensions are described in A.2.5.1, Figure A1. (See Figure A4.)

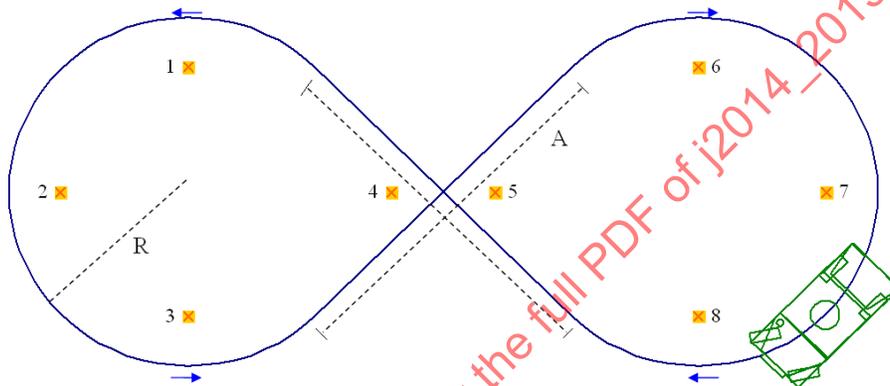


FIGURE A4 - BEAD UNSEATING TEST [UPDATE DRAWING TO 90 DEGREE INTERSECTION]

A.3.2.1 Test Course Radius of Curvature (R)

Outer one-half of the opposing curvatures bisected by the length of the course to be:

The radius at the centerline of the vehicle's front axle travel path is that which is produced by steering the vehicle at 90% of its specified full-lock turn.

A.3.2.2 Dimension A

WHERE “A” is about two times the vehicle wheelbase ($A \cong 2WB$)

The course layout is two off-set circles (R) connected by two short crisscrossing straights (“A”).

A.3.2.3 Test Course Base Material

The test course shall be constructed of sand. The test tire travel path shall be pre-rutted to a depth equal to one-half the tire's section height at the outside sidewall.

A.3.2.4 Course Grained Soil (Sand)

This test section shall be constructed of sand (SP-as determined by Unified Soil Classification System (USCS)). The depth of the SP soil shall be at least 750 mm (30 in), tilled to at least 200 mm (8 in), and dried to a moisture content of less than 2.0% in the top 75 mm (3 in) of sand. The cone index at the 75 mm (3 in) depth shall not exceed 100.

A.3.3 Test Vehicle

The test vehicles shall be loaded so that each individual static test tire load(s) is within $\pm 5\%$ of the maximum tire load for the intended vehicle (unless otherwise specified) Instrumentation

A.3.3.1 Speed

- a. A device to measure actual ground speed.
- b. A lap time measurement device.

A.3.3.2 Inflation Pressure

A calibrated pressure gauge.

A.3.3.3 Rim Contour/Bead Seat Diameter

TRA disc tape (or equivalent) for bead seat diameter and TRA Rim Contour Gauges (or equivalent) for other rim dimensions relating to tire fitment.

A.3.3.4 Load Scales

Mechanical or electronic weight scales with 2% full-scale accuracy.

A.3.3.5 Environmental Measurements

Ambient temperature and percent relative humidity to be recorded at the beginning and end of each test sequence.

A.3.3.6 Cone Penetrometer

To measure Cone Index (CI) of test area berm soil before and after each test sequence.

A.3.4 Test Procedure

A.3.4.1 Tire/Wheel/Runflat Assemblies

Inspect and measure test rims to assure they comply with the applicable rim standard (Ref: 4.4.6.2).

All tires and runflat devices shall be mounted for this test using the same procedures. Record maximum inflation pressure required to seat the beads. Inflated tires at test pressure should be stored for at least 24 h prior to mounting on vehicle.

Test tires shall be broken in by operating them on a hard surface road for 160 km (100 miles) at test load and maximum test inflation pressure at 80 km/h \pm 8 km/h (50 mph \pm 5 mph) average.

A.3.4.2 Test Tire/wheel/runflat assembly Positions

Test tire/wheel/runflat assemblies shall be mounted on both front steering positions. Any non-test wheel positions shall have tire/wheel/runflat assemblies of the same size, inflation pressure, and normal maximum load distribution.

A.3.4.3 Test Sequence - Test sequence shall start at the intersection of the "figure 8" and proceed clockwise into the first turn. Constant test speed shall be achieved after first "figure 8" lap. Cumulative lap timing for six (6) laps at constant speed shall begin after first lap is completed.

A.3.4.4 Inflation Pressure - Cold tire pressures shall be set at the minimum recommended inflation pressure immediately prior to the start of the six-lap sequence.

Measure inflation pressures and the tire rim rotational displacement at the completion of the six-lap sequence.

If the inflation pressure of the reference/control tire at the conclusion of its run is lower by 7 kPa (1 psi) below the cold inflation pressure at the start of the test, reinflate to the cold inflation pressure. Then rerun the reference/control tire at the next lowest speed increment.

Dismount and disassemble tire/wheel/runflat assemblies to check for and document foreign matter.

A.3.4.5 Test Vehicle Constant Speed Limit

With the reference/control tires installed, the test vehicle speed shall be increased incrementally until the maximum, controllable safe speed has been reached or air loss of 7 kPa (1 psi) has occurred.

A.3.5 Test Results

A.3.5.1 Data Reduction

Data reduction should include:

- a. Average speed: km/h (mph).
- b. Total distance to air loss: km (miles).
- c. Total time to air loss: s.
- d. Measured air loss: kPa (psi).
- e. Measured rotational displacement: mm (in).
- f. Measured rut depth: mm (in).
- g. Measured ambient and surface temperature: °C (°F).
- h. Measured inflation pressure at start and finish: kPa (psi).
- i. Measured Cone Index (CI) of the test area berm soil before and after each test sequence.

SAENORM.COM Click to view the full PDF of J2014_201303

A.4 MECHANICAL RELIABILITY/ (OFF ROAD DURABILITY) TEST (Ref: clause 4.4.7)

A.4.1 Purpose

This is a test to determine a tire/wheel/runflat assembly system's ability to withstand sustained operation on severe off-road conditions.

A.4.2 Facilities

The test course(s) shall be comprised of disjunctive sections of obstacles in a natural environment developed to be discrete, repeatable, and unavoidable. The test course will be a mix of 30% secondary with severe washboard, 30% rock terrain, and 40% cross-country terrain.

A.4.2.1.1 Selecting Test Course[Show in A.5.3]

The durability course will be selected with the following characteristics as a guideline.

- a. Washboard - Amplitude 25 mm to 100 mm (1 in to 4 in), frequency 200 mm to 900 mm (8 in to 36 in)
- b. Rock Terrain - Irregular shaped stone embedded in clay soil with rock size 75 mm to 150 mm (3 in to 6 in) and protruding 25 mm to 150 mm (1 in to 6 in) high, at a random spacing frequency of no less than 11 stones per m² (1 stone per ft²).
- c. Cross-Country - A combination of hills and curves across terrain with embedded stones at a random spacing frequency of no less than 6.6 stones per m² (0.6 stones per ft²). The cross-country shall have a section of rutted trail with stones embedded for direct impingement of the tread and sidewall.

A.4.3 Test Vehicle

The vehicle must be capable of meeting test criteria.

A.4.4 Instrumentation

Profiling equipment or a profiling vehicle equipped and instrumented to continuously measure and record the forces and accelerations will be required to quantify the courses. A measuring device for ground speed will be required for distance measurements along the courses.

- A.4.4.1 The test vehicle will be equipped with kilometer per hour (mile per hour) recording devices, either cable or electronically driven, calibrated to $\pm 2\%$ to provide documentation of test miles achieved.

A.4.5 Test Preparation

A.4.5.1 Tires

Reference/control and candidate tires will be tested on each surface condition.

A.4.5.2 Rims/Wheels/Runflat Devices

The tires shall be mounted on rim/wheels specified in the TRA Yearbook, and/or Military Supplement and/or Engineering Design Information, or ETRTO Standards Manual for the size being tested, unless the military specification requires a rim/wheel that differs from the TRA Military Supplement recommendation. In the latter case, the military specification will apply. Rims must be compatible with pressure and the test vehicle. Inspect and measure test rims to assure they comply with the applicable rim standard (Ref: 4.4.6.2).

Runflat Devices – Runflats shall be installed in the tire/rim assemblies as required. The runflat devices shall be installed according to the manufacturer's recommendations and marked in a way to identify any slip relative to the rim. All fasteners will be torqued to the manufacturer's recommendations and marked to indicate any change due to testing.

A.4.5.3 Inflation Pressure

Tire pressures shall be per the applicable technical manual based on the mission profile (unless otherwise specified).

A.4.5.4 Break-In

Each of the test samples shall be driven at maximum vehicle speed (not to exceed 90 km/h [55 mph]) on a dry paved surface for 160 km (100 mile) inflated to the highway tire pressure.

A.4.5.5 Initial Measurements

The tires shall be inspected and measured following the break-in. Measurements shall be at six (6) locations around the periphery of each tire and shall include: tread depth at crown and shoulders, section width, tread radius, tread arc width, and outside diameter. Runflat device measurements shall include: overall diameter, foot width, inner diameter, overall bead lock width.

A.4.6 Test Procedure

A.4.6.1 Test Conditions

A.4.6.2 Tire/Wheel/Runflat Assembly Loads

The test vehicle shall be loaded so that each individual static test tire's load(s) is within $\pm 5\%$ of the maximum tire load for the intended vehicle (unless otherwise specified).

A.4.6.3 Test Cycle

The test tires will be run in sequence of 145 km (90 miles) of secondary (washboard), 145 km (90 miles) of rock terrain, and 193 km (120 miles) of cross-country. This sequence will be repeated to complete a 966 km (600 mile) cycle.

A.4.6.4 Measurement and Recording Data

In addition to the initial tire measurement, each tire shall be measured and inspected at the end of each 966 km (600 mile) cycle. Inspect to establish casing growth, cutting, chipping, bruising, and modes of air loss in accordance with the administration manual failure and performance criteria. This data and the average velocity/mileage calculations will be entered on a test data sheet. At 1932 and 3864 km (1200 and 2400 miles) the tire(s) should be removed from the rim and inspected.

A.4.6.5 Test Duration

A maximum of four (4) cycles for a total of 3864 km (2400 miles) shall be run for acceptable durability of the tires.

A.4.7 Test Results

The distances traveled shall be determined by the measured course length. Odometer readings will be recorded for each course segment for reference. Time for each cycle shall be measured from start to finish of each segment of the test route as recorded on the recording device and driver's log. A segment is defined as the completion of a terrain type and the initiation of the subsequent terrain type.

A.5 TIRE TREADLIFE DURABILITY TEST (Ref: clause 4.4.8)

A.5.1 Purpose

This is a test to determine the tire/wheel/runflat assembly system's treadlife durability using the vehicle mission profile requirements.

A.5.2 Facilities

A.5.2.1 Test Vehicles

The vehicle used for tire treadlife testing shall be the production or prototype vehicle designed for and specified with the tire size being tested. A suitable alternate can be used provided it has similar vehicle characteristics and suspension system as the production vehicle, has limited service miles, and is properly aligned.

A.5.2.2 Tire/wheel/runflat system

A reference/control tire/wheel/runflat system is required for comparison and these tire/wheel/runflat systems must be rotated between vehicles maintaining the same wheel position to experience equal test mileage on each road service condition on all vehicles in the test.

A.5.3 Instrumentation

Profiling equipment or a profiling vehicle equipped and instrumented to continuously measure and record the forces and accelerations will be required to quantify the courses. A measuring device for ground speed will be required for distance measurements along the courses.

A.5.4 Test Course

The test duration shall be a minimum of 16 100 km (10 000 mile) or the system specification tire mileage requirement. The test surfaces should reflect the mission profile contained in the system specification for the vehicle, for example: 25% paved, 25% rough gravel, 30% level cross-country and 20% hilly cross-country.

A.5.5 Test Preparation

A.5.5.1 Tires

An appropriate number of tires for the vehicle, including spares, are required for test. These samples shall be production or pre-production tires free of anomalies and conforming to the manufacturer's standards.

A.5.5.2 Rims/Wheels

The tires shall be mounted on rim/wheels specified in the TRA Yearbook, and/or Military Supplement and/or Engineering Design Information, or ETRTO Standards Manual for the size being tested, unless the military specification requires a rim/wheel that differs from the TRA Military Supplement recommendation. In the latter case, the military specification will apply. Rims must be compatible with pressure and the test vehicle. Inspect and measure test rims to assure they comply with the applicable rim standard (Ref: 4.4.6.2).

A.5.5.3 Runflat Devices

Runflats shall be installed in the tire/rim assemblies as required. The runflat devices shall be installed according to the manufacturer's recommendations and marked in a way to identify any slip relative to the rim. All fasteners will be torqued to the manufacturer's recommendations and marked to indicate any change due to testing.

A.5.5.4 Break-In

An initial break-in period of not less than 160 km (100 mile) and no more than 480 km (300 mile) shall be run on a dry, paved surface at the highway inflation pressure.

A.5.5.5 Initial Measurements

Each tire shall be inspected and measured following the break-in. Measurements shall be made at a minimum of six (6), equally-spaced locations around the periphery of the tire for: tread depth at crown and shoulders, section width, tread radius, tread arc width, outside diameter, and tread profile. Runflat device measurements shall include: overall diameter, cap width, inner diameter, overall bead lock width. Refer to SAE J2013, Military Tire Glossary.

A.5.6 Test Procedure

A.5.6.1 Test Conditions

A.5.6.1.1 Test courses and the percent mileage on each surface selected for treadwear test shall reflect the mission profile of the vehicle. Refer to Administrator's manual for listing of tactical vehicles' mission profiles.

A.5.6.1.2 Tire Load

The vehicle load shall reflect the system specification of the vehicle, if known. Unless otherwise specified, 75% of mileage shall be at the maximum GVW of the test vehicle and the remaining 25% of mileage shall be at curb weight plus 50% of payload. The payload shall be placed evenly over the vehicle cargo area.

A.5.6.1.3 Inflation Pressure

Each tire pressure shall be per the applicable technical manual based on the mission profile (unless otherwise specified). Different pressures may be used for highway, cross-country, and mud, sand, and snow conditions.

A.5.6.1.4 Cycle

Each mileage cycle should contain the required mission profile percentage. The wheel assemblies shall be run in sequence for each specified surface condition and vehicle load condition. The cycle should be established so that wheel assemblies are rotated between vehicles at four (4) equally-spaced mileage intervals. Each candidate and reference/control wheel assembly being tested shall be rotated between vehicles maintaining the same wheel position to experience equal test mileage on each road service condition on all vehicles in the test. Each wheel assembly's mileage and the vehicle's maximum, minimum and average speed over the test course shall be recorded at each measurement interval.

A.5.6.1.5 Measurement and Data Recording

All tires shall be measured at the start of the test and at eight to ten (8 to 10) equally-spaced mileage intervals to correspond with driver shift changes, vehicle maintenance schedules, and tire rotations. At each measurement interval the tires should be inspected for damage, scuffing, chipping, and air loss, etc in accordance with the administration manual failure and performance criteria. Each tire tread condition shall be photographed at the start of the test, mid-point, and test completion. Each tire's mileage and maximum, minimum, and average vehicle speed shall be recorded at each measurement interval.

A.5.6.1.6 Tire Tread Depth Measurements

The tread depth shall be measured and recorded when the tire is new, after 24 h growth at rated inflation then adjusted to test tire pressure, and at approximately 1600 km (1000 mile) intervals. The tire's sidewall will be marked at a minimum of six (6), equally-spaced locations starting at a point adjacent to the DOT or tire serial number. These marks are to be located so they are not worn away or scuffed off during the test. Tread depth measurement must not be taken at treadwear indicators (measurement device must bridge both sides of the groove for accurate measurement).

A.5.7 Test Results

Measure the tread depth for each groove at each measurement point. Determine the amount of tread depth reduction for each measurement, at a given mileage interval, by subtracting the latest measurement from the tread depth at zero km (mile) and record in 0.025 mm (0.001 in). Calculate and record the tread depth reduction at each mileage measurement interval.

A.5.7.1 Tire Rate of Wear

The wear rate in km/mm (mile/mil), will be determined by dividing the miles traveled for that interval by the mils of rubber worn away. This procedure will be followed for each measurement point on each groove at each of the six (6) (minimum), equally-spaced measurement locations. The tire's average wear rate will be calculated by adding the wear rates of all measurement points and dividing by the total number of measurements for that individual tire. In a case where only three (3) grooves are present, the center groove will be measured and recorded twice. The overall average wear rate for all tires of a given design in the test will be determined by summing the wear rates for all tires and dividing by the total number of tires.

The overall average wear rate will be plotted and compared for both the candidate and reference/control tire at each mileage measurement interval. This graph should be used to establish a wear comparison between the candidate and reference/control tire and as a signal for test or measurement of abnormalities that can occur at a given measurement mileage point. Also, by mutual agreement (between the military and tire manufacturers). The tire wear comparison can be used to stop the test.

A.5.7.2 Percent Tread Consumed

This is a calculation to determine pass/fail, the overall average percent of tread consumed must be determined for the candidate tires and the reference/control tires.

The percent of tread consumed will be determined for each of the six (6) (minimum), equally-spaced measurement points on each groove of the tires as follows:

For tread depth measurements in metric units, the metric percent tread consumed use Equation A1:

$$\% \text{ Tread Consumed} = \frac{(\text{OTD} - \text{RTD})}{(\text{OTD} - 3.175)} \times 100 \quad (\text{Eq. A1})$$

For tread depth measurements in US customary units, the US customary percent tread consumed use Equation A2:

$$\% \text{ Tread Consumed} = \frac{(\text{OTD} - \text{RTD})}{(\text{OTD} - 0.125)} \times 100 \quad (\text{Eq. A2})$$

where:

OTD = original tread depth in 0.025 mm (0.001 in).

RTD = remaining tread depth in 0.025 mm (0.001 in).

0.125 = 4/32 in which is military worn tire removal criterion.

The tire's average percent of tread consumed will be calculated for each tire by adding the percent of tread consumed at all measurement points and dividing by the total number of measurements for that tire. The overall average percent of tread consumed for all tires of a given design in the test will be determined by summing the tire's average percent of tread consumed for all tires and dividing by the total number of tires.

A.6 COMPARATIVE STOPPING DISTANCE TEST (Ref: clause 4.4.9)

A.6.1 Purpose

This on-vehicle test is used to compare the stopping distance of the reference/control and candidate tire.

A.6.2 Facilities

The same test site and conditions as close as possible shall be used for testing both the reference/control and the candidate tire/wheel/runflat assemblies.

A.6.3 Vehicle Preparation

A.6.3.1 Tire Payload

The test vehicle shall be loaded so that each individual static test tire load(s) is within $\pm 5\%$ of the maximum tire load for the intended vehicle (unless otherwise specified).

A.6.3.2 Vehicle Tires

The test vehicle shall be equipped with a full set of the same tires (excluding spares). The tires shall have between 160 km and 480 km (100 miles and 300 miles) of wear on them prior to conducting the brake test. Testing shall include mixed fitment (candidate & reference tires) on same vehicle when applicable to address loss of stability concerns. (See 4.2)

A.6.3.3 Rims/Wheels

The tires shall be mounted on rim/wheels specified in the TRA Yearbook, and/or Military Supplement and/or Engineering Design Information, or ETRTO Standards Manual for the size being tested, unless the military specification requires a rim/wheel that differs from the TRA Military Supplement recommendation. In the latter case, the military specification will apply. Rims must be compatible with pressure and the test vehicle. Inspect and measure test rims to assure they comply with the applicable rim standard (Ref: 4.4.6.2).

A.6.3.4 Runflat Devices

Runflats shall be installed in the tire/rim assemblies as required. The runflat devices shall be installed according to the manufacturer's recommendations and marked in a way to identify any slip relative to the rim. All fasteners will be torqued to the manufacturer's recommendations and striped to indicate any change due to testing.

A.6.3.5 Vehicle Brakes

Test vehicle brakes and brake system shall be checked and adjusted for proper working condition as specified by the vehicle manufacturer. The brake lining/pad and drum/disc surfaces shall be clean and dry (free from contamination that might reduce friction) and inspected to ensure that the minimum amount of material is present in accordance with the manufacturer's recommendations.

A.6.4 Instrumentation

The test vehicle shall be equipped with fifth wheel or other high-resolution true ground speed and distance-measuring device. The vehicle shall also be equipped with a data recorder for recording speed, time versus braking distance (data to be taken from initial brake application to complete stop of the vehicle). A brake pressure actuated electrical switch shall be installed in the vehicle brake system. The fifth wheel and brake pressure switch shall be wired to the data recorder so that the readings are initiated by application of the brakes, and are continued until release of the brakes. A brake pedal force instrument is optional.

A.6.4.1 Inflation Pressure

The inflation pressure for all tires shall be adjusted when cold. Air pressure in each tire shall be that recommended for the load at the vehicle's maximum highway speed.

A.6.5 Test Preparation

A.6.5.1 Test Conditions and Test Speed

Testing shall be conducted on a straight, paved roadway, free of loose material with a slope that is less than 1%. The paved surface temperature shall be less than 60 °C (140 °F) during testing.

Vehicle speeds for the brake test shall be as required by the vehicle's end item specification. Unless otherwise specified, test speeds shall be at 64 km/h (40 mph) and 97 km/h (60 mph), on dry pavement, and 64 km/h (40 mph) and 97 km/h (60 mph) on wet pavement. If the vehicle top speed is less than 105 km/h (65 mph), test at 64 km/h (40 mph) and the top speed of the vehicle minus 6-13 km/h (4-8 mph).

A.6.5.2 Test Procedure

Accelerate the vehicle to above the required test speed. With automatic or manual transmission in gear and engaged, allow vehicle to coast and slow down to the required speed as indicated by the fifth wheel. At the required speed apply brakes at maximum effort. A predetermined brake pedal force may be used for consistent maximum braking. Record any unusual handling characteristics that occurred during braking. Repeat the test traveling in the opposite direction. Repeat the test for a minimum of three (3) runs in each direction. Allow sufficient time between each run to prevent brakes and tires from overheating. Testing of candidate and the reference/control tires shall be conducted in equivalent atmospheric conditions using the same test vehicle, instrumentation, and test site.

A.6.5.3 Test Results

The tire average stopping distance shall be an average of the distances recorded using a minimum of six (6) data points within ± 3 s (standard deviation).

- a. Initial stopping speed: ± 0.3 km/h (± 0.2 mph).
- b. Stopping distance: ± 0.3 m (± 1 ft). Information documenting test control (optional):
- c. Time to stop: ± 0.1 s.
- d. Pedal force: ± 2 kg (± 5 lb).
- e. Deceleration rate (measured): 0.3 m/s (± 1 ft/s).
- f. Static wheel load: $\pm 2\%$ of reading.
- g. Tire inflation pressure: ± 14 kPa (± 2 psi) at start of each sequence.
- h. Road surface temperature: ± 1 °C (± 2 °F).
- i. Tire tread surface temperature: ± 1 °C (± 2 °F).
- j. Ambient temperature: ± 1 °C (± 2 °F).
- k. Wind speed and direction: ± 0.4 m/s (± 1.5 ft/s).

A.6.6 Mix fitment recommendations

If multiple candidates and/or multiple tire/rim/runflat assemblies are previously qualified for the vehicle, a mixed fitment is recommended.

A.7 MISSION PROFILE RUNFLAT TEST (Ref: clause 4.4.13)

A.7.1 Purpose –The purpose of the mission profile Runflat test is to ensure that the tire / wheel / runflat assembly can withstand rifle fire and allow continuous mobility of the vehicle for a specified distance, speed, and terrain type.

A.7.2 Facilities - Refer to the administrator's manual for the required total miles.

All dynamic testing will be videotaped. The video recording will include a time stamp and will not be edited. Photographs of all test articles and ancillary parts (e.g., bolts, washers, nuts, etc.) will be taken before and after testing.

A.7.3 Test Vehicle – The vehicle shall be the production or prototype vehicle designed for and specified with the tire size being tested. A suitable alternate can be used provided it has similar vehicle characteristics and suspension system as the production vehicle, has limited service miles, and is properly aligned.

A.7.4 Instrumentation –

- a. A device to measure actual ground speed.
- b. A device to measure distance traveled
- c. A device to measure the ground and tire surface temperature

A.7.5 Test preparation - Prior to testing all tires and wheels will be marked to determine tire rotation relative to the wheel.

Two (2) or more samples of each tire and wheel/runflat device group will be damaged in accordance with FINABEL (Organization of European member states) 20.A.5 or A.20.A standard.

If the candidate runflat system is a multi-segmented device containing radial breaks (breaks perpendicular to circumference) the punctured quadrant will contain a segment mating surface. Punctured tires will be installed on the right side of the vehicle, on the front and rear axles, or on multiple axles as required.

A.7.6 Test Procedure – Testing will occur with ambient temperatures above 20°C (68°F). When applicable, any large, loose rock of approximately 6 inches or greater will be removed from the test courses and it will be ensured that all courses are dry and free from standing water.

If severe circumferential breaks in the tire assemblies – such as the tread breaking away from the sidewall – cause interference with the vehicle underbody or its operation, the vehicle will be stopped. The time, temperature and mileage shall be recorded.

If the test involves a fabric body ply tire, the tread may be cut away if requested by the testing sponsor. Prior to and at the conclusion of tread removal the time, tire temperature and ground temperature will be recorded. Down time will be minimized as much as possible to maintain test assembly temperatures. After tread removal the time, tire temperature and ground temperature will be recorded. Testing will then be immediately resumed with the runflat fully exposed.

Thermal profiling measurements will be conducted initially, at three evenly spaced locations throughout the test course, and at the conclusion of testing. These measurements will include ambient temperature, ground temperature and tire (outer sidewall shoulder junction and tread) or exposed runflat temperatures for all test assemblies.

Test Sequence

- Highway
- Secondary road
- Trail (depending on mission profile)
- Cross country

Mileage for each condition shall be proportional to the mission profile for the vehicle system.

Test Results – Testing will be terminated upon the occurrence of any of the following:

- Inability of the operator to maintain control of the vehicle
- Inability of the vehicle to be operated safely
- Inability of the vehicle to maintain continuous mobility
- Reduction in speed not attributed to measurement interval
- Any of the wheel rims contacting the ground
- Irreparable vehicle damage is imminent
- Completion of required mileage accumulation

The post-test inspection will include a system tear down. Any remaining deflated tire, wheel and runflat parts will be recovered and inspected for slip, wear and damage. The inspection will also include examination of the wheels for bent or damaged flanges, tire to wheel slip and tire beads and/or runflat spacers dislodged from the wheel. For pass/fail criteria, refer to the Administrator's manual.

SAENORM.COM : Click to view the full PDF of J2014_201303

A.8 PAVED RUNFLAT TEST (REF: CLAUSE 4.4.14)

- A.8.1 Purpose –The purpose of the Paved Runflat test is to ensure that the tire / wheel / runflat assembly can withstand rifle fire and allow continuous mobility of the vehicle over a paved surface for 30 miles at 30 mph.
- A.8.2 Facilities - The course shall be flat, level (not to exceed 1% grade) concrete or blacktop. Adequate acceleration and deceleration lanes and an adequate safety zone on each side of the course are also required.

All dynamic testing will be videotaped. The video recording will include a time stamp and will not be edited. Photographs of all test articles and ancillary parts (e.g., bolts, washers, nuts, etc.) will be taken before and after testing.

- A.8.3 Test Vehicle – The vehicle shall be the production or prototype vehicle designed for and specified with the tire size being tested. A suitable alternate can be used provided it has similar vehicle characteristics and suspension system as the production vehicle, has limited service miles, and is properly aligned.

A.8.4 Instrumentation –

- a. A device to measure actual ground speed.
- b. A device to measure distance traveled
- c. A device to measure the ground and tire surface temperature

- A.8.5 Test preparation - Prior to testing all tires and wheels will be marked to determine tire rotation relative to the wheel.

Two (2) or more samples of each tire and wheel/runflat device group will be damaged in accordance with FINABEL 20.A.5 or A.20.A standard.–If the candidate runflat system is a multi-segmented device containing radial breaks (breaks perpendicular to circumference) the punctured quadrant will contain a segment mating surface. Punctured tires will be installed on the right side of the vehicle, on the front and rear axles, or on multiple axles as required.

- A.8.6 Test Procedure – Testing will occur with ambient temperatures above 20°C (68°F). When applicable, any loose rocks will be removed from the test courses and it will be ensured that all courses are dry and free from standing water.

If severe circumferential breaks in the tire assemblies – such as the tread breaking away from the sidewall – cause interference with the vehicle underbody or its operation, the vehicle will be stopped. The time, temperature and mileage shall be recorded.

If the test involves a fabric body ply tire, the tread may be cut away if requested by the testing sponsor. Prior to and at the conclusion of tread removal the time, tire temperature and ground temperature will be recorded. Down time will be minimized as much as possible to maintain test assembly temperatures. After tread removal the time, tire temperature and ground temperature will be recorded. Testing will then be immediately resumed with the runflat fully exposed.

Thermal profiling measurements will be conducted initially, at three locations throughout the test course, and at the conclusion of testing. These measurements will include ambient temperature, ground temperature and tire (outer sidewall shoulder junction and tread) or exposed runflat temperatures for all test assemblies.

Test Results – Testing will be terminated upon the occurrence of any of the following:

- Inability of the operator to maintain control of the vehicle
- Inability of the vehicle to be operated safely
- Inability of the vehicle to maintain continuous mobility
- Reduction in speed not attributed to measurement interval
- Any of the wheel rims contacting the ground
- Irreparable vehicle damage is imminent
- Completion of required mileage accumulation

The post-test inspection will include a system tear down. Any remaining deflated tire, wheel and runflat parts will be recovered and inspected for slip, wear and damage. The inspection will also include examination of the wheels for bent or damaged flanges, tire to wheel slip and tire beads and/or runflat spacers dislodged from the wheel. For pass/fail criteria, refer to the Administrator's manual.

SAENORM.COM : Click to view the full PDF of J2014_201303

A.9 CURB IMPACT TEST (REF: CLAUSE 4.4.15)

- A.9.1 Purpose – The tire / wheel / runflat assemblies will be tested to evaluate if the candidate component adversely affects the vehicle occupants' health and/or comfort and to establish whether or not the candidate device prematurely degrades the tire, after impacting an 8-inch curb at a 0° and 45° angle of approach. Occupant comfort is quantified by measuring the peak vertical acceleration experienced at the base of the driver's seat. TOP 1-1-014 specifies 2.5 g's as the maximum vertical acceleration that can be attained without posing risk to occupant health and safety.
- A.9.2 Facilities – An 8 inch curb that is similar to a typical curb dimension is recommended which conforms to NATO AVTP 03-170 specifications. Testing may be done on any sized curb required by the administrator's manual or other source.
- A.9.3 Test Vehicle – The test vehicle shall be inspected to ensure that no previous testing has degraded the suspension or ride height that may affect the outcome of the results. Mount tire/wheel/runflat assemblies in all wheel positions.
- A.9.4 Instrumentation – Speed and a driver's seat base accelerometer measured at a minimum of 500 Hz. All accelerometer data shall be filtered using a 30 Hz low pass filter in accordance with TOP 1-1-014.
- A.9.5 Test Preparation – Tires will be x-rayed prior to assembly and after a post-test teardown inspection. Pre- and post-test x-rays will be compared in order to quantify damage to the tire structure as a result of testing.

Vehicle springs will be measured before and after test groups of each candidate to prevent unnoticed spring sag, which would impact the results of the evaluation.

Prior to testing all tires and wheels will be marked to determine tire rotation relative to the wheel. All assembly fasteners will be marked so that movement can be visually identified.

- A.9.6 Test Procedure – Height, weight and gender of the vehicle driver will be documented in the test log.

Test tire inflation pressure(s) – as specified by test sponsor, for example, cross country, highway, etc.

All testing will be videotaped. The video recording will include a time stamp and will not be edited. Photographs will be taken of the wheel assembly including ancillary parts (bolts, washers, nuts, etc.) before and after testing.

The curb will be painted prior to each run in order to identify the point of contact with the tire. After each curb impact, the marking will be transferred to the lower sidewall for future inspection.

The test vehicle will be driven over the curb obstacle at a 0° angle of approach (perpendicular to obstacle) while a constant speed is maintained. The initial speed will be determined by operator experience and will be chosen to induce less than 2.5 g's of vertical acceleration at the base of the driver's seat. Speed and acceleration data will be acquired for a sufficient period to capture the entire event and vehicle response. The test run will be repeated with the speed increasing in 2 mph increments until a minimum of 2.5 g's of vertical acceleration is achieved.

Collected acceleration data will be post-processed with a 30 Hz low-pass filter in accordance with TOP 1-1-014. The speed and peak acceleration will be plotted for each run and a power law regression line will be applied to the data. The speed at which exactly 2.5 g's is achieved will be interpolated from this regression line.

After achieving required speed, repeat interpolation procedure five (5) additional times so as to produce five (5) consecutive independent estimates of speed. Standard deviation of these six (6) speed values shall be less than 1 mph. Test shall be repeated at a 45° angle of approach on the driver side of the vehicle. Candidate runflat shall be subjected to the same speed and "number of curb impacts" as the control runflat.

At the immediate end of dynamic testing, prior to disassembly, a pressure gauge with a threaded valve stem will be attached to the inflation valve of each tire. Tire pressure and ambient temperature will be recorded immediately after testing, 24 hours static, 48 hours static and 2 weeks static. Due to the possibility of the pressure gauge inaccuracies, at the conclusion of the 2 weeks the gauge will be checked against a master gauge and an offset applied if necessary. In the event that a leak occurs and it is found to be due to the gauge, the tire will be re-inflated to the test pressure and the 2 week time period will be restarted.

At the end of all curb impact testing each tire will undergo a post-test inspection that will include a system tear down. The runflat device, wheel and inside of the tires will be inspected for damage or other anomalies. Assembly fasteners will be checked for adequate torque with paint markings and wheels will be checked for damaged or bent flanges.

A.9.7 Test Results -

The candidate assembly must meet the Failure Criteria requirements of J2014 administration manual section 4.4.15:

All results will be compared to the reference wheel assembly to determine changes in performance. For pass/fail criteria, refer to the Administrator's manual.

SAENORM.COM : Click to view the full PDF of J2014 - 201303

A.10 HALF ROUND TEST (REF: CLAUSE 4.4.16)

- A.10.1 Purpose – The objective of half round testing is to determine a candidate assembly's effects on the vehicle's suspension while driving over 6-, 8-, 10- or 12-inch half round obstacles. Half round performance is determined by interpolating the maximum speed the vehicle can traverse the obstacle before achieving 2.5 g's of peak vertical acceleration at the driver's seat or CG location. TOP 1-1-014 defines the 2.5 g's as the maximum allowable acceleration without posing significant risk to occupant health and safety.
- A.10.2 Facilities – Testing will be conducting over a half round as described in TOP 1-1-014. The height of the half round will be determined by the maximum the vehicle is capable of traversing without significant damage to the vehicle suspension / underside.
- A.10.3 Test Vehicle – The test vehicle shall be inspected to ensure that no previous testing has degraded the suspension or ride height that may affect the outcome of the results. . Mount tire/wheel/runflat assemblies in all wheel positions.
- A.10.4 Instrumentation – Speed and a driver's seat base accelerometer measured at a minimum of 500 Hz. All accelerometer data shall be filtered using a 30 Hz low pass filter in accordance with TOP 1-1-014.
- A.10.5 Test Preparation – Tires will be x-rayed prior to assembly and after a post-test teardown inspection. Pre- and post-test x-rays will be compared in order to quantify damage to the tire structure as a result of testing.

Vehicle springs will be measured before and after test groups of each candidate to prevent unnoticed spring sag, which would impact the results of the evaluation.

Prior to testing all tires and wheels will be marked to determine tire rotation relative to the wheel. All assembly fasteners will be marked so that movement can be visually identified.

Test tire inflation pressure(s) – as specified by test sponsor, for example, cross country, highway, etc.

- A.10.6 Test Procedure – Height, weight and gender of the vehicle driver will be documented.

All testing will be videotaped. The video recording will include a time stamp and will not be edited. Photographs will be taken of the wheel assembly including ancillary parts (bolts, washers, nuts, etc.) before and after testing.

In accordance with TOP 1-1-014, the vehicle will be driven over the half round obstacle while a constant speed is maintained. The vehicle will be orientated perpendicular to the half round so both front tires hit simultaneously. The initial speed will be determined by operator experience and will be chosen to induce less than 2.5 g's of vertical acceleration at the base of the driver's seat. Speed and acceleration data collection will start before the front tires encounter the obstacle and will be stopped after the rear tires have passed over the half round. The speed will then be increased in 2 mph increments until a minimum 2.5 g's of vertical acceleration is achieved at the driver's seat base. If excessive speeds are required to achieve the 2.5 g's that affects vehicle limitations, the test shall be reevaluated.

If steering has to be used while traversing the half round (other than for keeping the vehicle perpendicular to the obstacle) the test results will not be considered valid and the run will be repeated.