



SURFACE VEHICLE RECOMMENDED PRACTICE	J2301™	JAN2021
	Issued 2005-08 Stabilized 2016-01 Revised 2021-01	
Superseding J2301 JAN2016		
Universal Joint End Yoke Connection (Earwork)		

RATIONALE

This document has been revised to include the latest 14.5 C earwork yoke connection and to add a reference that there is no specific standard for 20 C earwork yoke connections that may be published.

1. SCOPE

This document specified the main dimensions and tolerances which affect interchangeability between end yoke earwork for the most common North American-used universal joints. Dimensions and tolerances of the mating universal joints are left to the discretion of the universal joint manufacturers.

The term “earwork” refers to the configuration and geometry defining end yoke connections directly provided for universal joint cross attachment of drivelines.

Earwork for certain styles of universal joint connections and flange connections have for a long time been proprietary to certain manufacturers. Over years of usage, proprietary rights have expired and the industry, as a whole, has used these earworks as standard. In an effort to tabulate some of the long-established practices, the following SAE Recommended Practice has been compiled. Manufacturers do from time to time, as the need arises, change tolerances or fits to better enhance component performance. This document has been prepared as a reference, and is a snapshot of current technology.

The half round (strap connection), full round (retainer plate type connection), and wing type connection are covered in this document. For an understanding of these end yoke styles, please refer to SAE J901.

There are earwork forms that still are proprietary and are not covered by this document.

1.1 Rationale

End yoke direct connections have historically been a practical, effective, generally accepted, and relatively economical method of attachment of drivelines to vehicle components. Industry practices exist to connect flanged drivelines to vehicles (refer to SAE J1945 and SAE J1946). No documentation, however, exists for direct yoke connections. This SAE Recommended Practice will establish this documentation for connecting geometry for full round, half round, and wing style end yokes.

SAE Technical Standards Board Rules provide that: “This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user.”

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

For more information on this standard, visit
https://www.sae.org/standards/content/J2301_202101

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest version of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA), www.sae.org.

SAE J901 Universal Joints and Driveshafts - Nomenclature - Terminology - Application

2.2 Related Publications

The following publications are provided for information purposes only and are not a required part of this SAE Technical Report.

2.2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA), www.sae.org.

AE-07 Universal Joint and Driveshaft Design Manual

3. DIMENSIONS AND TOLERANCES

Main nominal dimensions and tolerances, which affect the interchangeability of end yoke earwork, are shown in Section 4.

SAENORM.COM : Click to view the full PDF of J2301_202101

4. FIGURES AND TABLES

Table 1 - Dimension/feature description table

Dimension	Feature Description
A	Prime locating dimension (basic functional spacing for universal joint bearing)
B	Universal bearing outside diameter fit to yoke (does not apply to wing earwork)
C	Bolt hole/threaded hole spacing (for fasteners used in attaching the universal bearing to the yoke)
D	Wing keyway width (applies only to wing earwork)
E	Bolt hole location dimension (symmetric location of C; applies to wing and half round yokes)
F	Swing diameter (largest diameter occupied by centered rotating earwork)
G	Drilled option (for wing only; when yoke is drilled and bearing bushing is tapped)
H	Threaded specification (for wings, yoke is tapped and bearing bushing has through hole)
J	Clearance turning diameter (for wing only; typically required on smaller sizes)
K	Tang height (for wing only) or retaining height (for half round only)
L	Minimum depth of thread
M	Depth of keyway (for wing only)
N	Minimum depth of threaded hole
P	Minimum section required (for wing only)
R	Yoke ear width (for wing only)

Table 2 - Datum description table

Datum	Datum Description
W	Primary datum (yoke rotational centering feature; i.e., spline, bolt circle, pilot diameter, etc.)
X	Secondary datum
Y	Tertiary datum
Z	Alternate datum

SAENORM.COM : Click to view the full PDF of J2301_202101

**HALF ROUND EARWORK
YOKE DIMENSION STANDARD**

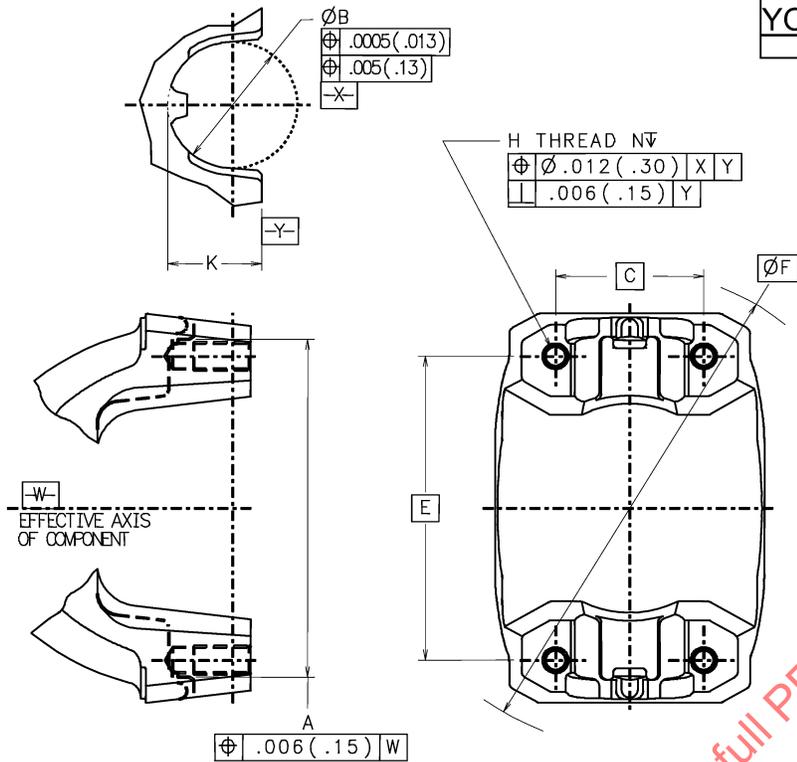


Figure 1 - Half round earwork yoke dimensions standard (see Table 3)

Table 3 - Half round earwork

Size	A ±0.001 (0.025)	B +0.0015 (0.038) -0	C Basic	E Basic	F Basic	H Thread	K ±0.002 (0.05)	N Depth
1310	3.219 (81.76)	1.062 (26.98)	1.580 (40.13)	2.908 (73.86)	4.00 (101.6)	0.250-28	0.565 (14.35)	0.62 (15.7)
1330	3.622 (91.99)	1.062 (26.98)	1.580 (40.13)	3.312 (84.12)	4.56 (115.8)	0.250-28	0.565 (14.35)	0.62 (15.7)
1350	3.622 (91.99)	1.187 (30.16)	1.800 (45.72)	3.188 (80.98)	4.56 (115.8)	0.312-24	0.628 (15.94)	0.75 (19.0)
1410	4.184 (106.27)	1.187 (30.16)	1.800 (45.72)	3.750 (95.25)	4.94 (125.5)	0.312-24	0.628 (15.94)	0.75 (19.0)
1480	4.184 (106.27)	1.374 (34.90)	2.125 (53.98)	3.688 (93.68)	5.31 (134.9)	0.375-24	0.721 (18.30)	0.75 (19.0)
1550	4.965 (126.10)	1.374 (34.90)	2.125 (53.98)	4.468 (113.49)	6.00 (152.4)	0.375-24	0.721 (18.30)	0.75 (19.0)
1610	5.311 (134.89)	1.875 (47.63)	2.500 (63.50)	4.800 (121.92)	6.75 (171.4)	0.312-24	1.313 (33.34)	0.75 (19.0)
1710	6.185 (157.09)	1.935 (49.20)	2.805 (71.25)	5.590 (141.99)	7.50 (190.5)	0.500-20	1.283 (32.58)	1.00 (25.4)
1760	7.093 (180.15)	1.935 (49.20)	2.805 (71.25)	8.500 (165.10)	8.38 (212.9)	0.500-20	1.283 (32.58)	1.00 (25.4)
1810	7.643 (194.12)	1.935 (49.20)	2.805 (71.25)	7.048 (179.02)	9.00 (228.6)	0.500-20	1.283 (32.58)	1.00 (25.4)

**FULL ROUND EARWORK
YOKE DIMENSION STANDARD**

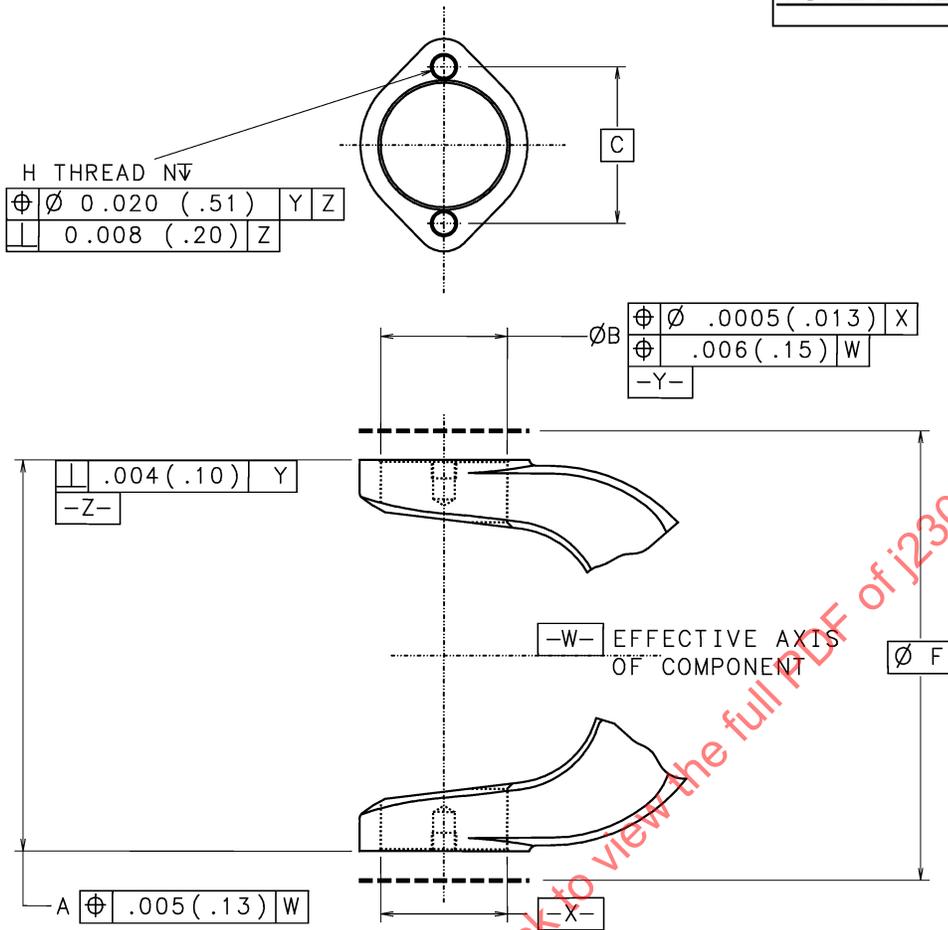


Figure 2 - Full round earwork yoke dimension standard (see Table 4)

Table 4 - Full round earwork

Size	A ±0.001 (0.025)	B +0.0015 (0.038) -0	C Basic	F Basic	H Thread	N Depth
1610	5.311 (134.90)	1.8755 (47.638)	2.313 (58.75)	7.00 (177.8)	0.312-24	0.437 (11.1)
1710	6.185 (157.09)	1.9375 (49.212)	2.437 (61.90)	7.88 (200.2)	0.375-24	0.500 (12.7)
1760	7.093 (180.15)	1.9375 (49.212)	2.437 (61.90)	8.62 (218.9)	0.375-24	0.500 (12.7)
1810	7.643 (194.12)	1.9375 (49.212)	2.437 (61.90)	9.19 (233.4)	0.375-24	0.500 (12.7)
1880	8.094 (205.59)	2.1862 (55.530)	2.813 (71.45)	9.94 (252.5)	0.438-20	0.75 (19.1)