



SURFACE VEHICLE STANDARD	J2473	APR2014
	Issued	2001-08
	Revised	2014-04
Superseding J2473 NOV2007		
Self-Propelled Sweepers and Scrubbers - Maximum Gradient Rating During Hopper Discharge		

RATIONALE

The document has been revised to update referenced document and clarify some statements.

1. SCOPE

This SAE Standard establishes the maximum gradient rating during hopper discharge of self-propelled, driver-operated sweepers and scrubbers as defined by SAE J2130-1 and SAE J2130-2.

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publication

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

- SAE J2130-1 Identification of Self-Propelled Sweepers and Cleaning Equipment Part 1 – Machines with a Gross Vehicle Mass Greater than 5000 kg
- SAE J2130-2 Identification of Self-Propelled Sweepers and Cleaning Equipment Part 2 – Machines with a Gross Vehicle Mass up to 5000 kg
- SAE J2180 A Tilt-Table Procedure for Measuring the Static Rollover Threshold for Heavy Trucks

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2014 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/J2473_201404

2.2 Related Publications

The following publications are provided for information purposes only and are not a required part of this SAE Technical Report.

2.2.1 SAE Publication

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J765 Crane Load Stability Test code.

3. DEFINITIONS

3.1 HOPPER RATED LOAD

The material mass in kilograms of bagged sand applied to the hopper according to the manufacturers' specifications.

3.2 OUTRIGGERS

Extendable or fixed arms attached to the base machine that rest on the supporting surface to define the balance point fulcrum. See Figures 1 and 2.

3.3 TIPPING LINE (SIDE DUMP)

3.3.1 Sweeper with Steerable Axle

A line connecting the centers of contact of the front and rear tires with the ground reference plane on the tipping side of the machine. See Figures 3 and 4.

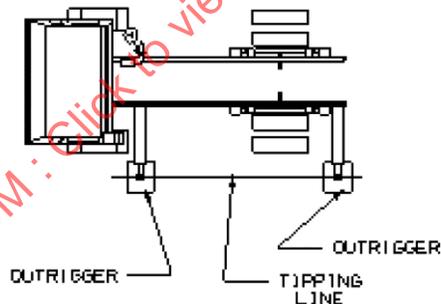


FIGURE 1 - OUTRIGGER EQUIPPED

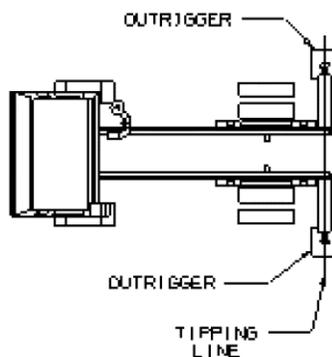


FIGURE 2 - OUTRIGGER EQUIPPED

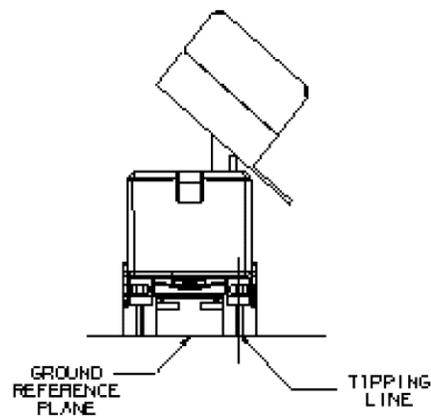


FIGURE 3 - SIDE DISCHARGE

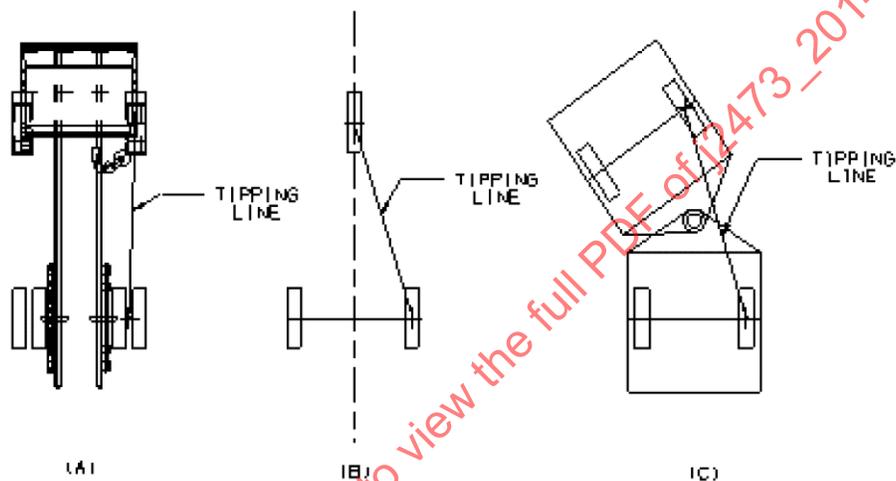


FIGURE 4 - SIDE DISCHARGE

3.3.2 Sweeper with Oscillating Axle

A line connecting the center of contact of the tire on the rigid axle with the ground reference plane on the tipping side of the machine and the center of oscillation of the oscillating axle.

3.3.3 Sweeper with Articulating Steering

A line connecting the center of contact of the tires on the tipping axle when the vehicle is set to turn on full lock away from the tipping side. See Figure 4c.

3.3.4 Sweeper with Outriggers

A line connecting the center of contract of the outrigger pads with the ground reference plane on the tipping side of the machine. See Figure 1.

3.4 TIPPING LINE (FRONT OR REAR DUMP)

3.4.1 Sweeper without Outriggers

A line through the front or rear axle on the tipping end of the machine. See Figures 5 and 6.

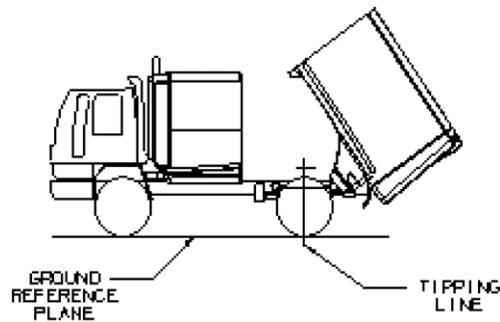


FIGURE 5 - REAR DISCHARGE

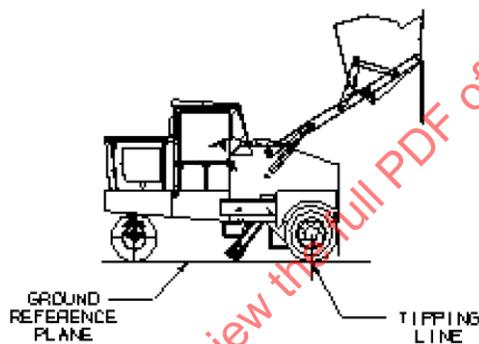


FIGURE 6 - FRONT DISCHARGE

3.4.2 Sweeper with Outriggers

A line connecting the center of contact of the outrigger pads with the ground reference plane on the tipping end of the machine. See Figure 2.

3.5 BALANCE POINT

3.5.1 Machine Without Outriggers

The moment acting to overturn the machine at hopper rated load that shall not cause any tire on the side opposite the load side to lift more than 1.6 mm from the ground reference.

3.5.2 Machine with Outriggers

The moment acting to overturn the machine at hopper rated load that shall not cause any tire or outrigger pad on the side opposite the load to lift more than 1.6 mm from the ground reference plane.