

SAE STANDARD J283

APPROVED AS ANSI/SAE J283 SEP83-1984
BY AMERICAN NATIONAL
STANDARDS INSTITUTE

**Test Procedure for Measuring Hydraulic
Lift Capacity on Agricultural Tractors
Equipped with Three-Point Hitch –
SAE J283 SEP83**

SPONSORED BY:
SAE, INC.

PUBLISHED BY:
SAE, 400 Commonwealth Drive, Warrendale, PA 15096

S.A.E.
LIBRARY

Approved by AMERICAN NATIONAL STANDARDS INSTITUTE, July 18, 1984

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether he has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review and users are cautioned to obtain the latest editions.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

SAE Technical Board Rules and Regulations

All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE Standard or SAE Recommended Practice, and no commitment to conform to or be guided by any technical report.

In formulating and approving technical reports, the Technical Board, its Councils and Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents.

PRINTED IN U.S.A.

TEST PROCEDURE FOR MEASURING HYDRAULIC LIFT CAPACITY ON AGRICULTURAL TRACTORS EQUIPPED WITH THREE-POINT HITCH—SAE J283 SEP83

SAE Standard

Report of the Tractor Technical Committee, approved January 1972, completely revised by the Agricultural Tractor Technical Committee September 1983. Rationale statement available.

1. Purpose and Scope

1.1 The purpose of this document is to establish test procedures for measuring and recording lift capacity referred to in SAE J715, Three-Point Free-Link Hitch Attachment of Implements to Agricultural Wheeled Tractors (Ref. International Standard ISO 789/II, Test Code for Agricultural Tractors).

1.2 The lift capacity can be determined by Section 4, Static Lift Force Test, and/or Section 5, Dynamic Lift Capacity Test. When the results are recorded, the test method shall be identified.

2. Definitions

2.1 Terms used in this document are defined in SAE J715, Three-Point Free-Link Hitch Attachment of Implements to Agricultural Wheeled Tractors.

3. General

3.1 The accuracy of the measurements shall be as follows:

- 3.1.1 Time— $\pm 2\%$
- 3.1.2 Temperature— $\pm 2^\circ\text{C}$ (4°F)
- 3.1.3 Pressure— $\pm 2\%$
- 3.1.4 Mass (Weights)— $\pm 1/2\%$
- 3.1.5 Distance— ± 3 mm ($1/8$ in)

3.2 The hydraulic oil temperature shall be maintained at the value measured in the tractor during a two-hour maximum power PTO test. A hydraulic system oil temperature determined from maximum power drawbar operation shall be used when a PTO test cannot be conducted. These tests, if conducted, shall be in accordance with SAE J708.

3.3 Lift time, if required, shall be recorded as the average of three consecutive lift sequences.

3.4 Measurements and test data shall be recorded as shown in Fig. 2.

3.5 This same procedure shall be used to determine the hydraulic lift capacity of tractors equipped with a quick attaching coupler.

4. Static Lift Force Test

4.1 With the lower links horizontal, set the mast to 457 mm (18 in) for Category I, to 483 mm (19 in) for Category II, to 559 mm (22 in) for Category III, and to 686 mm (27 in) for Category IV. With the lower links horizontal, adjust the upper link such that the mast is vertical (See Fig. 1).

4.2 A test frame shall be used which provides the mast height for each category in accordance with paragraph 4.1 and such that the lower hitch point spread is proper for the category being tested. [Category I, 681.0–684.3 mm (26.81–26.94 in); Category II, 822.5–825.5 mm (32.38–32.50 in); Category III, 963.7–966.7 mm (37.94–38.06 in); Category IV, 1165–1168 mm (45.87–45.99 in)]. The lift force application point shall be 610 mm (24 in) to the rear of the lower hitch point with the lower links horizontal. The construction angle (the angle between the mast and the test frame load arm) shall be 90 deg (see Fig. 1). The center of gravity shall be at a point 610 mm (24 in) to the rear of the hitch points, on a line at right angles to the mast and passing through the middle of the line joining the lower hitch points.

4.3 The tractor shall be rigidly supported at the height from ground level equivalent to the loaded radius of the largest R-1 rear tires and the corresponding largest front tires (see SAE J711, Tire Selection Tables for Agricultural and Light Industrial Machines of Future Design). The tire sizes and loaded radii used shall be listed as part of the test data, Fig. 2. If the tractor tested cannot be conveniently supported at this radius, it is permissible to mathematically adjust the readings to the specified largest front and rear loaded radii.

4.4 The tractor should be operated at rated engine speed. The lift force capacity in this procedure shall be based upon the minimum specified system pressure. If the measured system pressure exceeds the value, math-

ematically adjust the lift force measured to the minimum specified system pressure level.

4.5 The hydraulic lift system's oil temperature shall be determined and maintained as specified in paragraph 3.2.

4.6 The tests shall be conducted so that lift force is measured throughout the total lift range as specified in SAE Standard J715, Three-Point Free-Link Hitch Attachment of Implements to Agricultural Wheeled Tractors. Since the minimum power range is less than the total lift range, links may be adjusted once during the tests to obtain lift force throughout the total lift range. If the links are readjusted to meet the specified lift range, this information shall be recorded.

4.7 Tractors equipped with more than one upper link attaching point on the tractor should have the upper link attached to the category position recommended by the manufacturer for heavy draft implements such as mounted plows, etc.

4.8 Measure the vertical force, at static conditions, available from the 610 mm (24 in) point on the test frame and include the weight of the test frame. This vertical lift force shall be measured at not less than 6 points, equally spaced, including the maximum and the minimum points, throughout the total lift range.

4.9 The smallest value determined in paragraph 4.8 shall be the tractor static hydraulic lift force.

5. Dynamic Lift Capacity Test

5.1 A test frame and tractor shall be used as described in paragraphs 4.2 and 4.7.

5.2 The tractor shall be rigidly supported from ground level as described in paragraph 4.3.

5.3 A mass shall be mounted on the frame so that its center of gravity and the frame center of gravity are positioned as described in paragraph 4.2. The value determined in paragraph 4.8 can be used as a starting point.

5.4 The hydraulic lift system's oil temperature shall be determined and maintained as specified in paragraph 3.2.

5.5 The dynamic lift test shall be conducted so that the mass is lifted throughout the total lift range as specified in SAE J715. Since the minimum power range in SAE J715 is less than the total lift range, links may be adjusted once during the tests to assure the mass is capable of being lifted throughout the total lift range. If the links are readjusted to meet the specified lift range, this information shall be recorded in Fig. 2.

5.6 With the manually operated engine governor control set to provide rated engine speed, execute a lift sequence using the mass selected in paragraph 5.3. Adjust the mass as necessary to obtain the maximum mass which can be (a) fully lifted through the specified tractor lift range and (b) does not require more than 10 s to move through the minimum power range as specified in SAE J715.

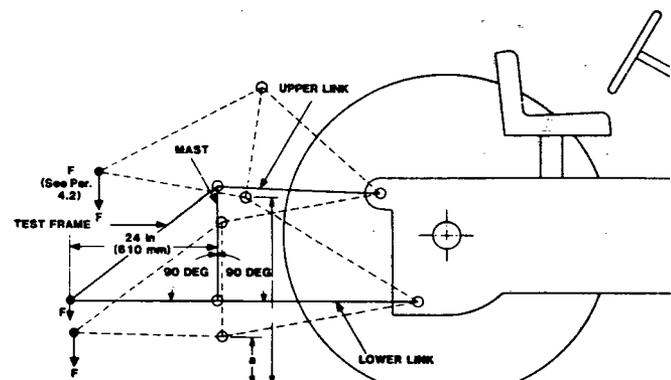


FIG. 1—TEST FRAME

The ϕ symbol is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. If the symbol is next to the report title, it indicates a complete revision of the report.