

Power Cylinder Friction: Mechanisms

RATIONALE

Not applicable.

TABLE OF CONTENTS

1.	SCOPE.....	5
1.1	Purpose.....	5
2.	REFERENCES.....	5
3.	DEFINITIONS	6
4.	BASICS OF FRICTION	6
5.	POWER CYLINDER COMPONENT - EFFECTS ON FRICTION	7
5.1	Piston	9
5.2	Ring Pack.....	9
5.2.1	Top Ring.....	9
5.2.2	Second Ring.....	9
5.2.3	Oil Ring	9
5.3	Cylinder Bore	9
5.4	Oil Properties	9
6.	OTHER EFFECTS ON FRICTION.....	10
7.	FRICTION CONTRIBUTION FIGURE.....	11
8.	PISTON EFFECTS ON FRICTION.....	12
8.1	Piston Mass (Minor Effect).....	12
8.2	Piston Cooling (Minor Effect)	12
8.3	Piston Ring Grooves	12
8.3.1	Angles (Medium Effect).....	12
8.3.2	Tilt (Minor Effect).....	13
8.3.3	Waviness (Minor Effect).....	13
8.3.4	Surface Conditions (Medium Effect)	14
8.3.5	Chamfers (Minor Effect).....	14
8.3.6	Parallelism (Minor Effect).....	15
8.3.7	Ring to Groove Clearances (Minor Effect).....	15
8.3.8	Ring Groove Material (Minor Effect)	15

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2010 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: 1+ 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
 http://www.sae.org

SAE values your input. To provide feedback on this Technical Report, please visit
http://www.sae.org/technical/standards/j2904_201001

SAE WEB ADDRESS:

8.4	Piston Lands	15
8.4.1	Diameters (Major Effect)	15
8.4.2	Piston Land Heights (Minor Effect)	15
8.4.3	Piston Land Axial Profiles (Major Effect)	16
8.4.4	Piston Land Circumferential Profiles (Major Effect)	17
8.4.5	Piston Land Coatings (Minor Effect)	17
8.4.6	Piston Guidance by a Land (Major Effect)	17
8.4.7	Accumulator Grooves (Minor Effect)	17
8.5	Oil Drain	18
8.5.1	Oil Drain Holes (Minor Effect)	18
8.5.2	Oil Drain Slots (Minor Effect)	18
8.5.3	Trans Slots (Major Effect)	19
8.5.4	Drain along Sides of the Piston (Minor Effect)	19
8.5.5	Oil Drain to the Pin Bore (Minor Effect)	20
8.6	Piston Skirt	20
8.6.1	Piston Guidance or Piston Secondary Motion (Major Effect)	20
8.6.2	Skirt Size (Major Effect)	23
8.6.3	Skirt Flexibility (Medium Effect)	23
8.6.4	Skirt Surface Finish (Medium Effect)	23
8.6.5	Skirt Coatings (Major Effect)	23
8.6.6	Skirt Chamfer (Minor Effect)	23
8.7	External Effects on Piston Friction	24
8.7.1	Crankshaft Offset (Major Effect)	24
8.7.2	V-angle and Bank Effects (Minor Effect)	24
8.8	Piston Pin Bore	24
8.8.1	Unit Pressure on the Pin Bore (Medium Effect)	24
8.8.2	Pin Bore Design (Medium Effect)	25
8.8.3	Axial Piston Pin Bore Profile (Medium Effect)	26
8.8.4	Circumferential Piston Pin Bore Profile (Medium Effect)	27
8.8.5	Pin Bore Clearances (Medium Effect)	27
8.8.6	Pin Bore Material Effect (Medium Effect)	27
8.9	Piston Cooling (Medium Effect)	28
8.9.1	Connecting Rod Spray and Cooling Nozzles (Major Effect)	28
8.10	Piston Temperatures (Major Effect)	28
8.10.1	Piston Thermal Distribution	28
8.10.2	Oil Viscosities (Major Effect)	28
8.10.3	Carbon Build Up	28
9.	PISTON RING EFFECTS ON FRICTION	29
9.1	General Piston Rings	29
9.1.1	Circumferential Conformability (Minor Effect)	29
9.1.2	Surface Conditions (Medium Effect)	29
9.2	Compression Rings	29
9.2.1	Ring Twist (Minor Effect)	29
9.2.2	Angles (Medium Effect)	29
9.2.3	Closed Gap (Minor Effect)	29
9.2.4	Gap Ratios (Minor Effect)	29
9.2.5	Ring Axial Width (Medium Effect)	30
9.2.6	Ring Mass (Minor Effect)	30
9.2.7	Ring Circumferential Shape (Minor Effect)	30
9.2.8	Tension of the Compression Ring (Medium Effect)	31
9.2.9	Face Profile (Medium Effect)	32
9.2.10	Top Ring Face Profile (Medium Effect)	32
9.2.11	Second Ring Face Profile (Medium Effect)	33
9.2.12	End Gap Chamfer (Minor Effect)	34
9.2.13	OD Chamfers (Minor Effect)	34
9.2.14	Waviness (Chatter) (Minor Effect)	35
9.2.15	Straightness (Minor Effect)	36
9.2.16	Roughness (Medium Effect)	36

9.3	Ring Materials (Medium Effect).....	36
9.3.1	Base Material (Minor Effect)	36
9.3.2	Face Coating Material (Medium Effect)	36
9.4	Oil Ring	36
9.4.1	General Oil Ring.....	37
9.4.2	Two Piece Oil Ring.....	37
9.4.3	Three Piece Oil Ring.....	38
10.	CYLINDER BORE EFFECT ON FRICTION	39
10.1	Cylinder Bore Surface Finish (Major Effect)	39
10.1.1	Peak Honed Bore Surfaces (Major Effect).....	39
10.1.2	Plateau Honed Surface (Major Effect)	39
10.1.3	Textured Surface (Medium Effect)	40
10.1.4	Surface (Major Effect)	40
10.2	Cylinder Bore Honing Angle (Minor Effect).....	40
10.3	Bore Distortion (Medium Effect).....	41
10.4	Cylinder Bore Material (Medium Effect)	42
10.5	Cylinder Bore Coating (Medium Effect)	42
10.6	Chamfer at the Bottom of the Cylinder Bore (Minor Effect)	42
10.7	Carbon Scraper Rings (Medium Effect).....	42
11.	CONNECTING ROD (MEDIUM EFFECT).....	42
11.1	Connecting Rod Small End.....	42
11.1.1	Connecting Rod Small End Unit Pressure (Medium Effect)	42
11.1.2	Connecting Rod Small End Design (Medium Effect).....	42
11.1.3	Small End Axial Profile (Medium Effect)	42
11.1.4	Circumferential Small End Pin Bore Profile (Medium Effect).....	42
11.1.5	Small End Pin Bore Clearances (Medium Effect).....	42
11.1.6	Small End Pin Bore Material Effects (Minor Effect)	43
11.2	Connecting Rod Big End Bearing Friction (Major Factor)	43
11.2.1	Bearing Size.....	43
11.2.2	Bearing Lubrication	43
11.2.3	Big End Oil Film Thickness and Peak Oil Film Pressure (Major Effect)	43
11.3	Connecting Rod to Crank Clearances (Minor Effect)	43
12.	OIL EFFECTS ON FRICTION (MAJOR EFFECT)	43
12.1	Viscosity (Major).....	43
12.2	Oil Temperature (Major).....	43
12.3	Oil Additives (Major).....	43
12.4	Oil Brand (Medium).....	43
13.	OIL JET OR OIL SQUIRTER EFFECTS ON FRICTION	44
13.1	Oil Jet Targeting (Medium Effect)	44
13.2	Oil Jet Spray Angle (Medium Effect).....	44
13.3	Types of Oil Jet (Medium Effect).....	44
14.	PISTON PIN EFFECTS ON FRICTION (MEDIUM EFFECT)	45
14.1	Pin Length (Medium Effect)	45
14.2	Pin Diameter (Medium Effect).....	45
14.3	Pin Stiffness (Medium Effect).....	45
14.4	Pin Surface Finish (Medium Effect)	45
14.5	Pin Surface Hardness (Minor Effect)	46
14.6	Pin Surface Coating (Medium Effect)	46
15.	SYSTEM EFFECTS ON FRICTION	46
15.1	Ring/Groove Side Clearance (Medium Effect).....	46
15.2	Ring/Groove Back Clearance (Medium Effect).....	46
15.3	Connecting Rod to Crank Radius Ratio (L/r) (Major Effect)	46

16.	ENGINE OPERATION	46
16.1	Engine Speed.....	46
16.2	Engine Load.....	46
16.3	Engine Maintenance	46
16.4	Fuel Injection Effects.....	46
16.4.1	Fuel Dilution	46
16.4.2	Soot in the Oil.....	47
16.4.3	Oil Burning	47
16.5	Coolant Temperatures	47
17.	QUALITY ISSUES.....	47
17.1	Cylinder Bore Quality	47
17.2	Piston Quality	47
17.3	Piston Ring Quality.....	47
17.4	Assembly Issues	47
17.4.1	Incorrect Rings in the Wrong Grooves.....	47
17.4.2	Missing Rings.....	48
17.4.3	Broken Rings.....	48
17.4.4	Lack of Proper Lubrication During Installation	48
17.4.5	Excessive Core Sands from the Block or Head Casting	48
17.4.6	Improper Torque Procedure when Assembling Cylinder Heads to Block	48
17.4.7	Improper O-rings in the Cylinder Liner.....	48
18.	OTHER EFFECTS	48
18.1	Scuffing	48
18.2	Ring Sticking	48
19.	NOTES	48
19.1	Marginal Indicia	48
FIGURE 1	LOCATIONS OF POWER CYLINDER FRICTION	7
FIGURE 2	POWER CYLINDER	8
FIGURE 3	FRICTION CONTRIBUTION OF THE POWER CYLINDER COMPONENTS	8
FIGURE 4	POWER CYLINDER FRICTION CONTRIBUTIONS	11
FIGURE 5	ANGLES OF RINGS AND GROOVES	12
FIGURE 6	GROOVE UPTILT	13
FIGURE 7	GROOVE WAVINESS	14
FIGURE 8	EFFECT OF THE LARGE OUTSIDE DIAMETER EDGE BREAK	14
FIGURE 9	LAND DIAMETERS	15
FIGURE 10	LAND PROFILES	16
FIGURE 11	LAND AND SKIRT PROFILE EXAMPLE	16
FIGURE 12	LAND ACCUMULATOR GROOVES	18
FIGURE 13	OIL DRAIN TRANS SLOTS	19
FIGURE 14	OIL DRAIN SLOTS	19
FIGURE 15	EXAMPLE OF THE EFFECT OF PIN OFFSET ON PISTON MOTION	20
FIGURE 16	PISTON PROFILES	21
FIGURE 17	SKIRT AXIAL PROFILES.....	22
FIGURE 18	SKIRT CIRCUMFERENTIAL CONTOURS	23
FIGURE 19	SKIRT CHAMFERS	24
FIGURE 20	ILLUSTRATION OF THE UNIT PRESSURE CALCULATION	25
FIGURE 21	EXAMPLES OF PIN BORE DESIGNS	25
FIGURE 22	EXAMPLES OF PIN BORE CONTACT LOCATIONS.....	26
FIGURE 23	EXAMPLES OF DIFFERENT PIN BORE AXIALPROFILES.....	26
FIGURE 24	EXAMPLES OF DIFFERENT PIN BORE CIRCUMFERENTIAL PROFILES.....	27
FIGURE 25	AN EXAMPLE OF AN ALUMINUM PISTON WITH PIN BORE BUSHINGS.....	27
FIGURE 26	GALLERY COOLED PISTON.....	28
FIGURE 27	RING TWIST TERMINOLOGY	29
FIGURE 28	ILLUSTRATION OF RADIAL GAS FORCES ACTING ON THE RING	30
FIGURE 29	EXAMPLE OF CALCULATED RING PRESSURE PATTERN	31

FIGURE 30	ILLUSTRATION OF RING TENSION MEASUREMENTS	32
FIGURE 31	EFFECT OF FACE PROFILE ON NET FORCE ACTING ON THE RING	33
FIGURE 32	SECOND RING FACE PROFILES	33
FIGURE 33	END GAP CHAMFER	34
FIGURE 34	SCHEMATICS OF BOTTOM SIDE OD CHAMFERS.....	34
FIGURE 35	RING COATING APPLICATION EXAMPLES	35
FIGURE 36	WAVY RING EXAMPLE.....	35
FIGURE 37	RING STRAIGHTNESS EXAMPLE	36
FIGURE 38	TWO PIECE OIL RING	38
FIGURE 39	THREE PIECE OIL RING	39
FIGURE 40	PLATEAU HONED SURFACE	40
FIGURE 41	EXAMPLES OF THE EFFECTS OF BORE DISTORTION	41
FIGURE 42	DIFFERENT ORDERS OF BORE DISTORTION.....	41
FIGURE 43	OIL SPRAY ANGLE	44
FIGURE 44	OIL SQUIRTER EXAMPLES	45

1. SCOPE

This document covers the mechanisms from the power cylinder which contribute to the mechanical friction of an internal combustion engine. It will not discuss in detail the influence of other engine components or engine driven accessories on friction.

1.1 Purpose

In internal combustion engines, the ability of an engine to generate its power potential to its fullest is hindered by the inherent internal friction of the sliding components and the friction of the engine driven accessories. In an era where power and fuel economy are key performance attributes, any operating condition which hinders the ability of an engine to achieve these attributes is of primary interest to the engine designer. Any sliding surface in the engine contributes to the friction of an engine. According to Taylor, (Reference a), the friction of an internal combustion engine is partitioned between the piston and ring assembly and the bearing, valve, and gear trains with the piston assembly accounting for 75% of the friction. Since the power cylinder friction is a major contributor to the over-all mechanical friction of the engine, any friction reduction goes directly to brake power with no increase in emissions, will add thermal efficiency at no cost to the customer, and can potentially improve durability. Any attempt to minimize the friction of an engine logically starts with decreasing the friction of the piston assembly. This document focuses on the friction of the piston and ring assembly sliding in a lubricated bore, in an attempt to communicate the current best thinking on the subject of power cylinder friction. With this understanding, the engine designer or engine development engineer will be able to minimize the friction of the power cylinder assembly thereby contributing to the power output or fuel economy of an internal combustion engine.

2. REFERENCES

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest version of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J1588 Internal Combustion Engines—Piston Rings—Vocabulary

SAE J2612 Internal Combustion Engines—Piston Vocabulary

2.2 Related Publications

The following publications are provided for information purposes and are not a required part of this document.

The Internal Combustion Engine in Theory and Practice, Volume 1, by Charles F. Taylor, M.I.T. Press, 1986

Handbook of Tribology, Materials, Coatings, and Surface Treatments, by Bharat Bhushan and K. K. Gupta. McGraw-Hill, 1991

"Review of Power Cylinder Friction for Diesel Engines," J. Eng. Gas Turbines Power 122, 506 (2000)

3. DEFINITIONS

See SAE J2612, Piston Vocabulary for the piston nomenclature.

See SAE J1588, Piston Ring Vocabulary for the piston ring nomenclature

4. BASICS OF FRICTION

Friction is the resistance to relative motion of contacting bodies. Friction force and friction power loss are two basic methods to characterize friction. Friction power losses are of most concern regarding fuel consumption. Friction forces can be very high but have a small effect on power losses. Friction forces may be better correlated to wear and durability.

Friction experienced during a sliding condition is known as sliding friction, and the friction experienced during a rolling condition is known as rolling friction. The friction in the power cylinder is exclusively sliding friction. (Reference b)

The friction between lubricated sliding surfaces can be classified into the following lubrication regimes; hydrodynamic, mixed lubrication, and boundary lubrication. Hydrodynamic lubrication between sliding surfaces occurs when the lubricating film thickness is sufficient in thickness to avoid asperity contact. Friction in this regime is caused by shear resistance of the oil film. Boundary lubrication occurs when the film thickness is insufficient to separate the adjacent sliding surfaces and friction is dominated by asperity contact. Mixed lubrication occurs when the film thicknesses transition between the hydrodynamic and boundary regimes. Friction tends to be highest in the boundary regime and is characterized by high wear rates. Within the Mixed and boundary regime, friction is due to the various combined effects of adhesion between the contacting surfaces, ploughing by wear particles and hard surface asperity, and asperity deformation. The relative contribution of these components depends on the specific material used, the surface topography, the conditions of sliding interface, and the environment.

The components that affect the power cylinder friction are the piston, piston rings, cylinder bore, wrist pin, and the lubricant. The piston assembly slides against the lubricated cylinder bore and wrist pin, and it is this sliding contact that generates the mechanical friction of the power cylinder. By the inherent design of the internal combustion engine, the piston undergoes a wide range of velocities; with zero velocity at top dead center (TDC) and bottom dead center (BDC), and maximum velocity at mid-stroke. Due to this wide range of piston speeds, the piston, rings, and cylinder bore experience all the lubrication regimes as described above within an engine cycle. The wrist pin, due to its intermittent motion, usually resides within the mixed lubrication regime.

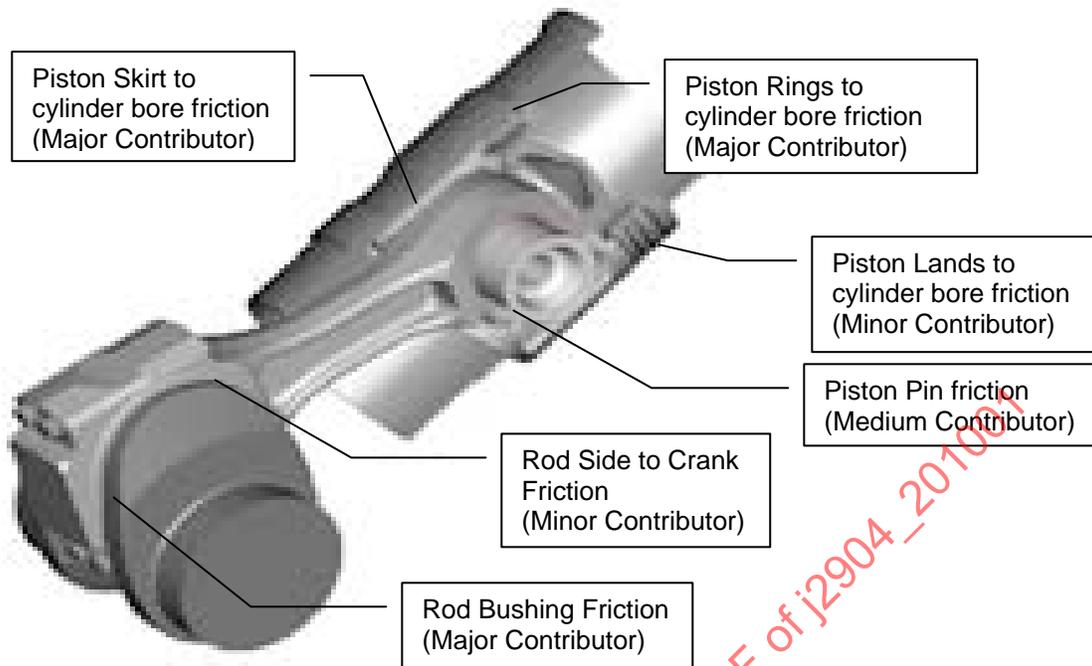


FIGURE 1 - LOCATIONS OF POWER CYLINDER FRICTION

5. POWER CYLINDER COMPONENT - EFFECTS ON FRICTION

The following power cylinder components each can contribute to friction. These effects will be described in subsequent sections.

Components

- Piston
- Rings
 - Top Compression Ring
 - Second Compression Ring
 - Oil Control Ring
- Cylinder Bore
- Oils
- Oil Jets
 - Under-crown Spraying
 - Gallery Cooling Sprays
 - Cylinder Wall Jet
- Piston Pin
- Connecting Rod

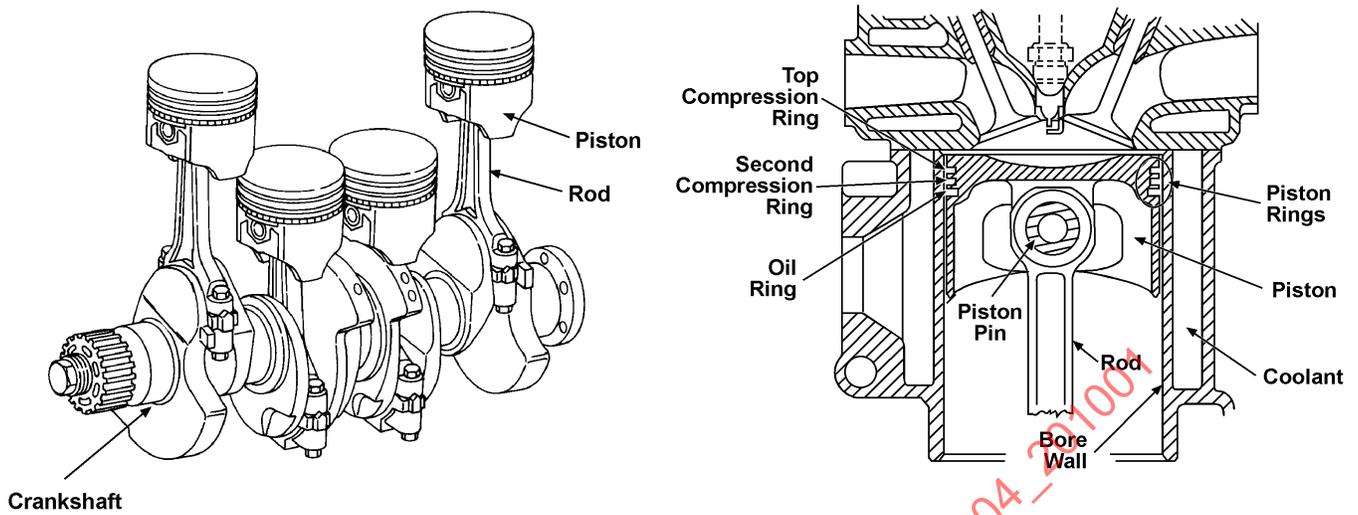


FIGURE 2 - POWER CYLINDER

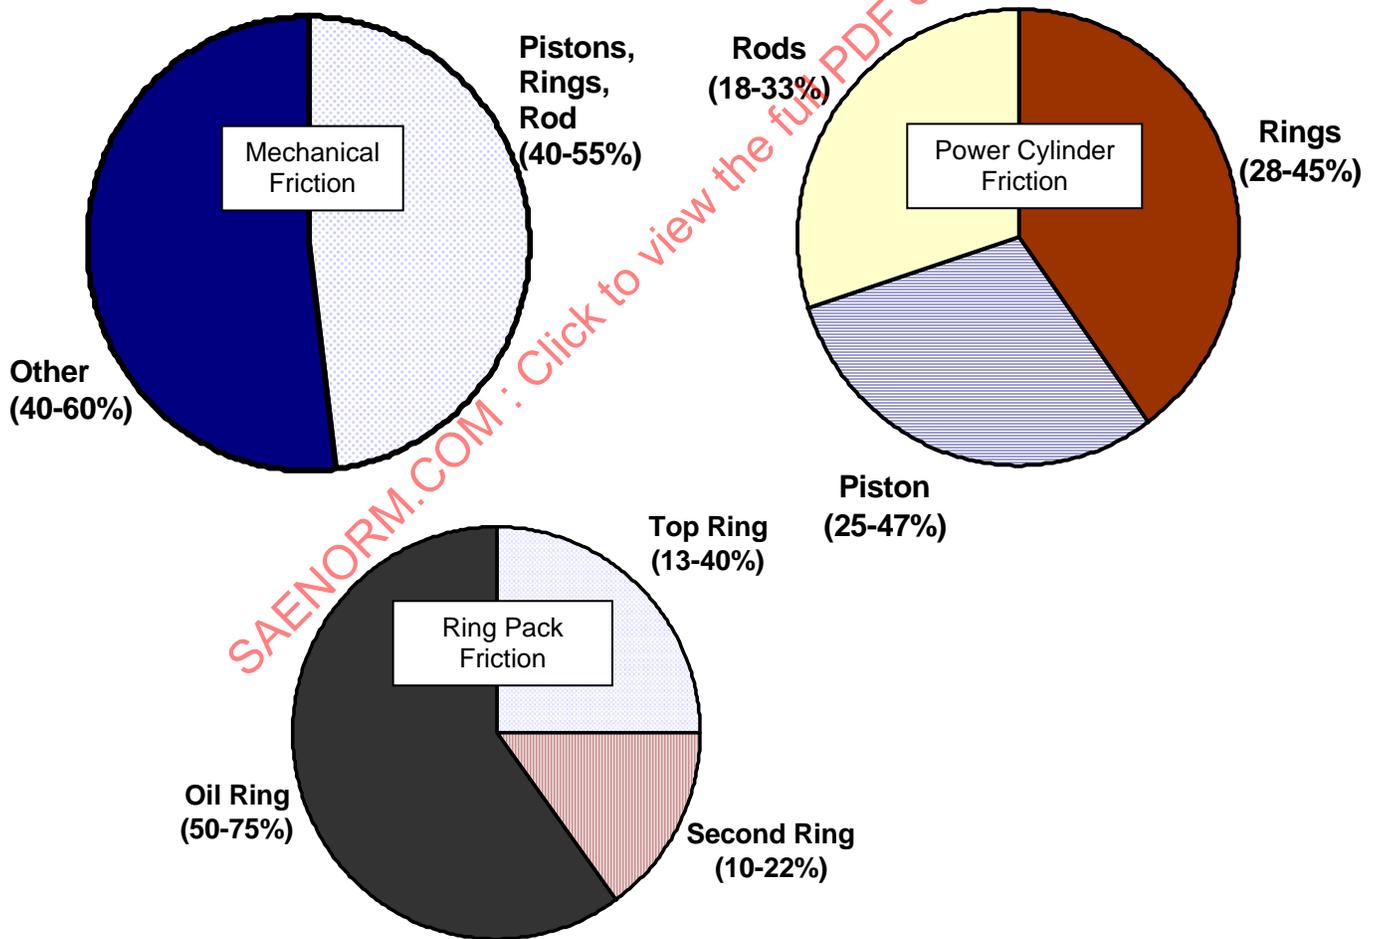


FIGURE 3 - FRICTION CONTRIBUTION OF THE POWER CYLINDER COMPONENTS (REF. C)

5.1 Piston

The piston contributes to roughly 50% of the power cylinder mechanical friction. The friction between the piston and the cylinder wall is the primary contribution of the piston to the overall engine friction. However, the interface with the piston pin can also contribute.

5.2 Ring Pack

The ring pack contributes to most of the remaining power cylinder friction; with the contribution between the piston and ring pack approximately equally balanced. The top ring and oil control ring are the main contributors to friction for the ring pack. The contribution between the oil ring and top ring varies between engine designs, but in general, are similar in their effects on friction.

5.2.1 Top Ring

The primary function of the top ring is to seal the combustion gases. Therefore it is exposed to the high cylinder pressures. As a result the friction from the top ring is mainly due to gas pressure loading and occurs mainly during the expansion stroke.

5.2.2 Second Ring

The second ring primarily scrapes the excess oil off the bore surface that passes by the oil ring and therefore controls the amount of oil available for the top ring. The second ring also controls the pressure balance between the top ring and second ring which affects the dynamic stability of the ring pack. However, this ring is a small contributor for friction relative to the top ring and oil ring. Therefore, it is important to design this ring to allow good oil control and ring pack stability; which, ultimately will enable friction reduction by allowing the top ring and oil control ring to be designed for reduced friction.

5.2.3 Oil Ring

The oil ring reduces the oil film thickness from that required for piston skirt lubrication to that required for compression ring lubrication. The oil ring requires a high tangential load to produce enough unit pressure on the oil rails to effectively scrape oil. This high tangential load produces a high frictional force. With a more efficient scraper design for the 2nd ring, the oil ring tangential loads may be reduced without significant degradation of oil control for the ring pack. Likewise, reduced rail widths on the oil control ring will also allow reduce tangential loads for equivalent oil control capability.

5.3 Cylinder Bore

The interaction of the piston and rings with the bore surface affects the gas and oil sealing of the cylinder. As a result, it is the function of the cylinder bore to provide a good sealing surface with sufficient but not excessive oil retention for the lubrication of the piston and rings. The conditions of the bore (temperatures, distortion, surface finish, rigidity, etc.) also need to be optimized for proper friction. Since the cylinder bore is also the frictional mating surface for both the piston and rings, it is critical for the bore to be designed for minimal bore distortion, and with a surface finish texture designed to avoid asperity contact and control oil film thicknesses throughout the entire engine cycle for the rings and piston. The tension required in the rings to create a seal is a function of the roundness errors in the cylinder bore. Higher order distortion (fourth order and higher) is more difficult to seal, so for a low friction assembly, it is important to minimize this distortion.

5.4 Oil Properties

The properties of the oil play a significant role in friction. The properties must be optimized to lubricate the cylinder sufficiently, but minimize friction. Factors that will affect the friction are viscosity, volatility, misting characteristics, and surface tension. While the engine designer does not have control of these properties, he or she must be aware of them so that an accurate specification can be stated for optimum operation of the engine.

6. OTHER EFFECTS ON FRICTION

There are other components and factors that can also significantly affect friction which are listed below. These are not discussed in detail in this document, but it is important to understand their influence when diagnosing friction problems or optimizing the friction of an engine. These other systems must be isolated in order to optimize or determine the friction contribution by the power cylinder system.

- Valve Train (valves and valve guides, cam shaft, rollers, rocker arms, etc)
- Crankshaft (main bearings, big end bearing on the connecting rod)
- Pumps and accessories (oil pump, water pumps)
- Gear Train

SAENORM.COM : Click to view the full PDF of j2904_201001

7. FRICTION CONTRIBUTION FIGURE

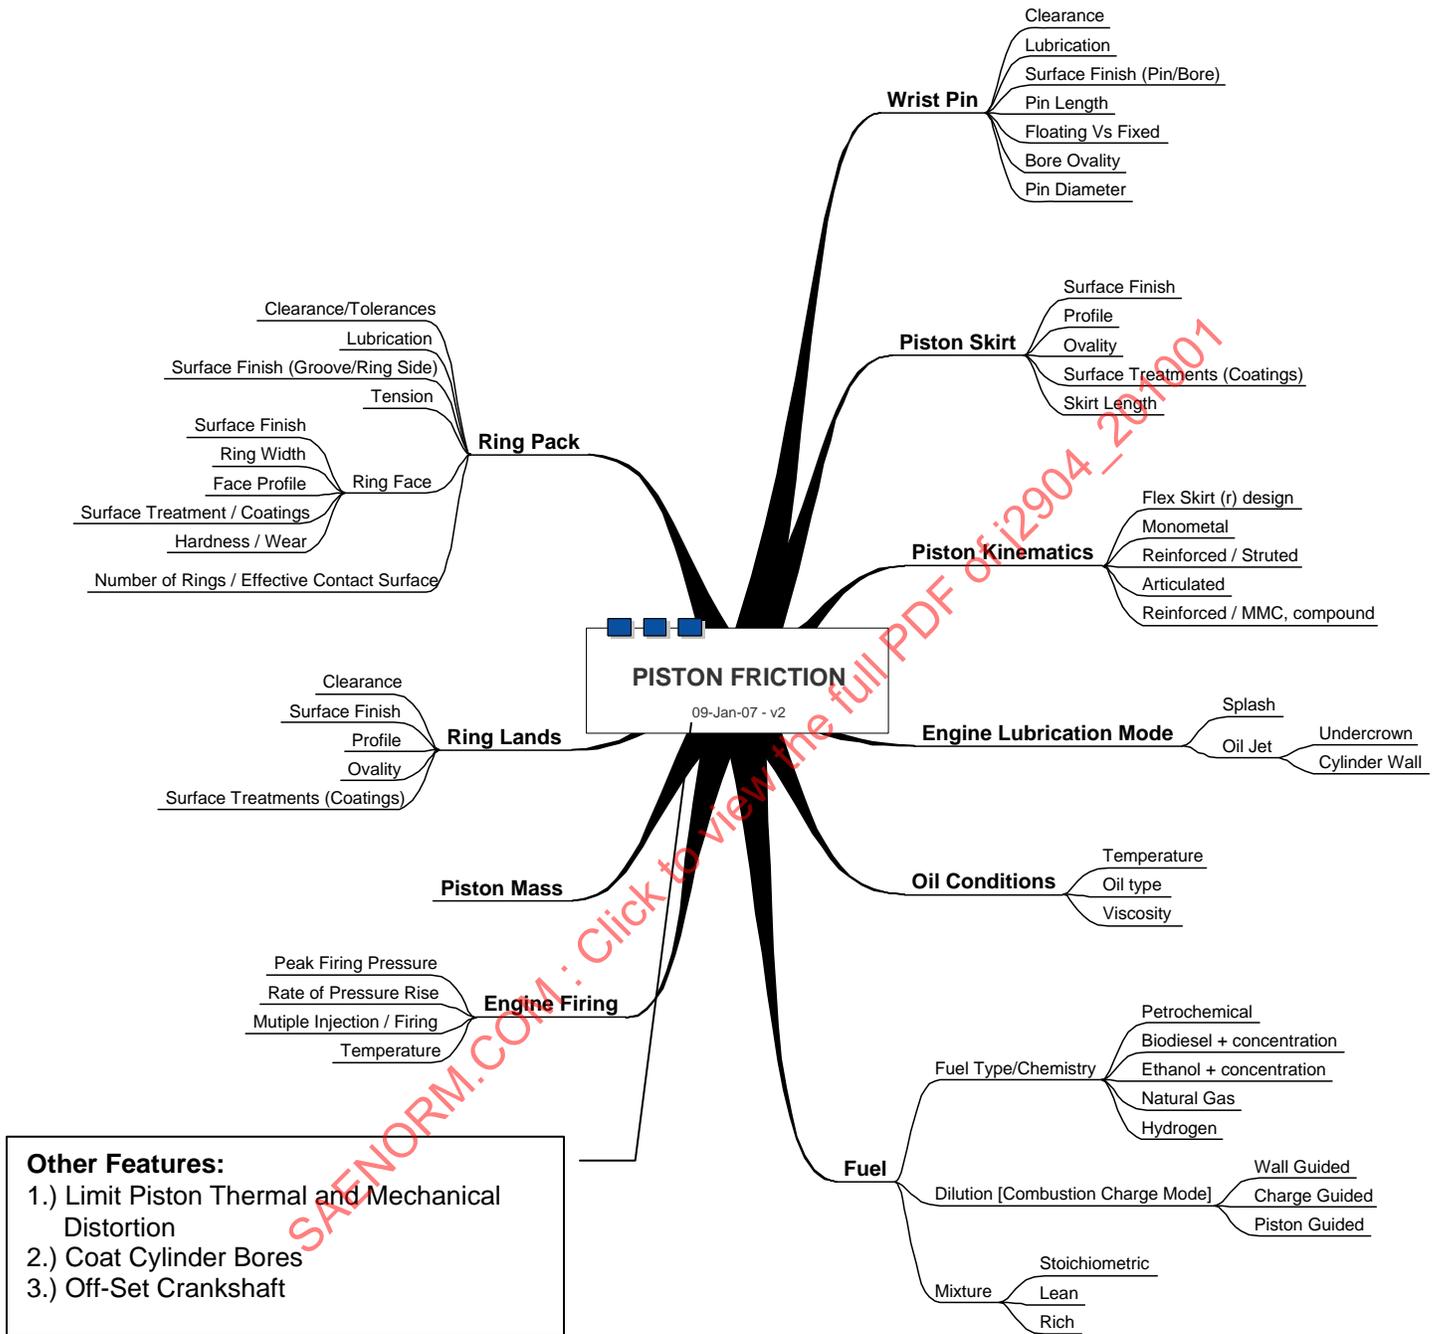


FIGURE 4 - POWER CYLINDER FRICTION CONTRIBUTIONS (NEED TO COMPARE TO THE DOCUMENT)

8. PISTON EFFECTS ON FRICTION

8.1 Piston Mass (Minor Effect)

The piston mass will affect the inertia forces on the piston. The thrust force will therefore change as the piston mass is changed, which will affect friction. In addition, the position of the center of gravity can also affect the piston's secondary motion and alter friction. The inertial loads of the piston will affect the friction in the rod bearings. The piston mass will be affected by the piston type, bowl design, ring land design, and material.

8.2 Piston Cooling (Minor Effect)

The cooling of the piston will affect the temperatures of the interfaces to the pistons. This will affect friction. Hotter pistons will result in less viscous oils and thinner oil films but also greater thermal expansion creating higher skirt contact forces.

Pistons can be cooled by piston galleries. The location and shape of the galleries will have a significant effect on how well the gallery cools the piston.

8.3 Piston Ring Grooves

8.3.1 Angles (Medium Effect)

The keystone ring groove will have a reaction force from the pressure acting on the ring in the horizontal direction (see figure below). This will create a higher force acting on the cylinder bore which will result in higher friction and wear than a rectangular ring.

Conventional wisdom is that rectangular ring grooves are better for oil and blow-by control. However in some cases keystone ring grooves are needed to prevent ring sticking, especially in diesel engines. If rings stick, thrust forces from the piston will be transferred to the ring. With increased thrust forces on the ring, ring friction will significantly increase.

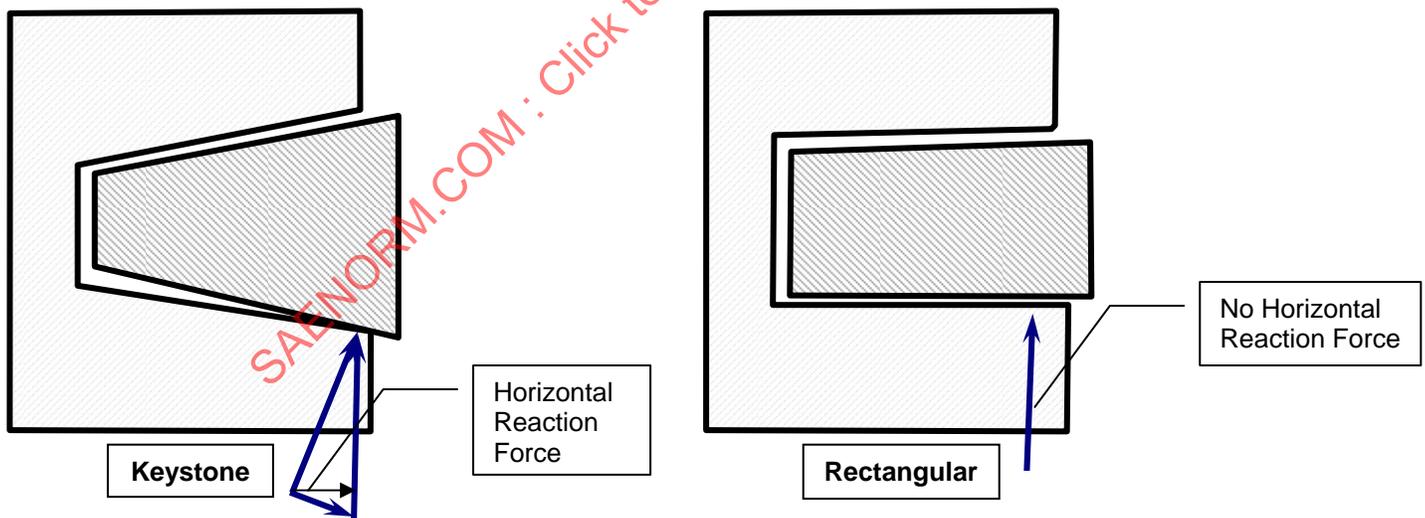


FIGURE 5 - ANGLES OF RINGS AND GROOVES

8.3.2 Tilt (Minor Effect)

The uptilt of the ring groove is defined by the angle that a symmetrical ring groove will have relative to the horizontal.

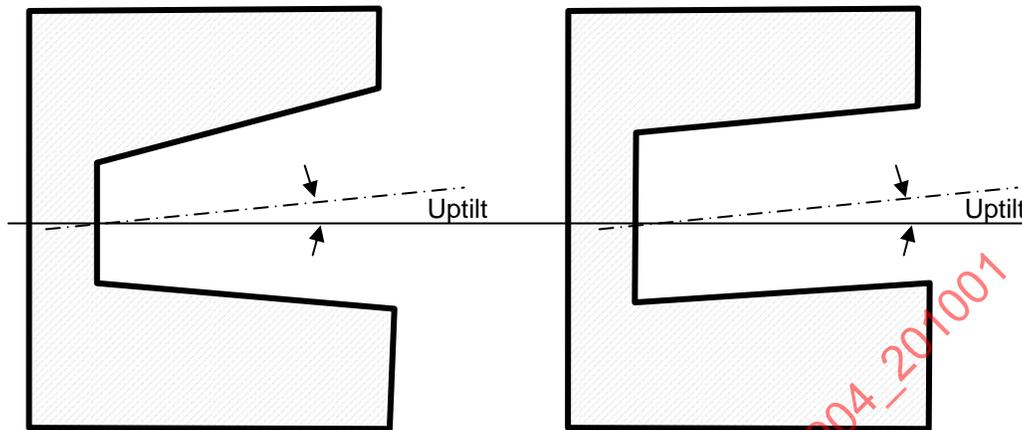


FIGURE 6 - GROOVE UPTILT

Due to high temperature and pressures, it is possible that the ring groove will rotate downward. This arching effect will be more pronounced on the top ring groove. It is common to give the ring grooves a positive uptilt to compensate for this arching of the piston. Finite element models can be used to determine the extent of the piston arching so that the uptilt can be specified appropriately. To verify the prediction, the top ring face should have a wear track that is centered on the ring face after the engine has been run under high thermal conditions.

To reduce friction, the groove uptilt can be over-specified for the top ring which in some cases may cause the ring to tilt backwards in the groove. If this happens, it will cause the face of the ring to seal towards the bottom side of the ring face (as opposed to the center of the face as is typical). With the pressure seal located towards the bottom of the ring face, less area will be available for the cylinder pressure to load the ring against the cylinder bore. With lower pressure loads, friction for the top ring can be reduced when under firing loads.

A negative tilting of the ring groove can cause ring to bore contact at the upper edge of the ring face. This contact can result in upward scraping of oil and increased friction substantially.

8.3.3 Waviness (Minor Effect)

Circumferential waviness will affect how the ring will seal with the piston ring groove. Excessive waviness will create flow paths for oil and/or gases to pass by the ring. The circumferential length and the height of a wavy portion determine whether there is a leak path or not. Waviness will affect the unit pressure for the ring against the groove, primarily for the second ring. If the unit pressures increases, friction may increase. However, with less sealing, the pressure forces on the ring may reduce to cause a net reduction of friction for the ring.

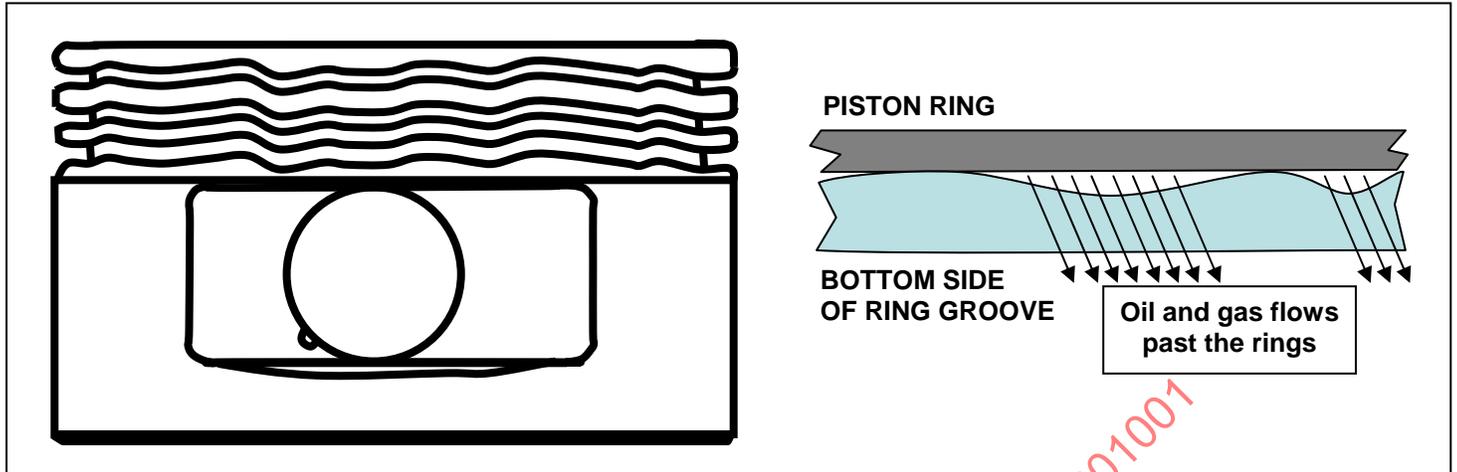


FIGURE 7 - GROOVE WAVINESS

8.3.4 Surface Conditions (Medium Effect)

If the surface roughness or waviness is excessive, friction will increase between the ring and groove. This friction will affect the secondary dynamics of the piston and transfer thrust loads to the rings. This effect may cause increased unit pressures on the ring faces, and cause increased friction between the ring and cylinder bore.

8.3.5 Chamfers (Minor Effect)

The outside diameter edge break on the bottom side of the ring groove can affect friction (See Figure 8). If the edge break is too large, the ring might twist down causing the ring to ride on the upper edge of the face which will increase friction.

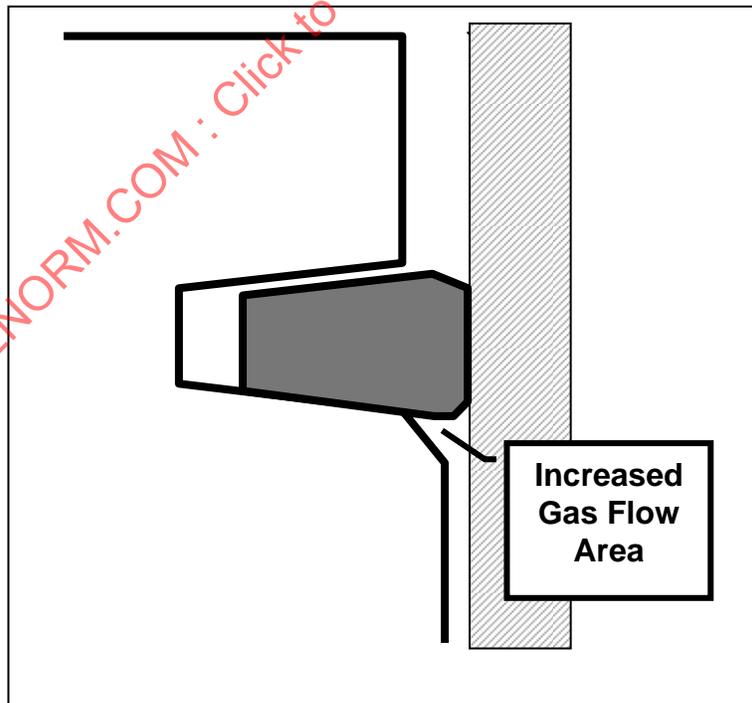


FIGURE 8 - EFFECT OF THE LARGE OUTSIDE DIAMETER EDGE BREAK

8.3.6 Parallelism (Minor Effect)

If the ring groove width becomes smaller because of poor parallelism, the ring may become pinched in the groove. This will cause friction between the ring and the groove, transferring thrust loads to the rings. Increase thrust forces on rings can lead to increased friction.

8.3.7 Ring to Groove Clearances (Minor Effect)

The clearances between the piston, rings, and bore can affect friction. These should be designed to provide adequate clearances to avoid thrust forces from the piston being transferred to the rings. For instance, if the root diameter in the ring groove is too large or the side clearances are too small, the ring may be pressed against the bore increasing friction or resulting in scuffing. If there is adequate clearances, there will be no significant effect on friction.

8.3.8 Ring Groove Material (Minor Effect)

The groove material or coatings on the groove can affect the friction and wear of the groove. High groove side wear and ring side wear can increase friction.

8.4 Piston Lands

8.4.1 Diameters (Major Effect)

The diameters of the ring lands affect the clearance between the lands and the cylinder bore. If the clearance is too small, land contact may occur which can increase friction due to asperity contact which also may cause scuffing. Furthermore, the land might scrape oil upward and result in high oil consumption. In some cases, carbon will build up on the lands when the clearance is incorrectly specified. This could scrape oil upward and/or cause bore polishing which will increase friction.

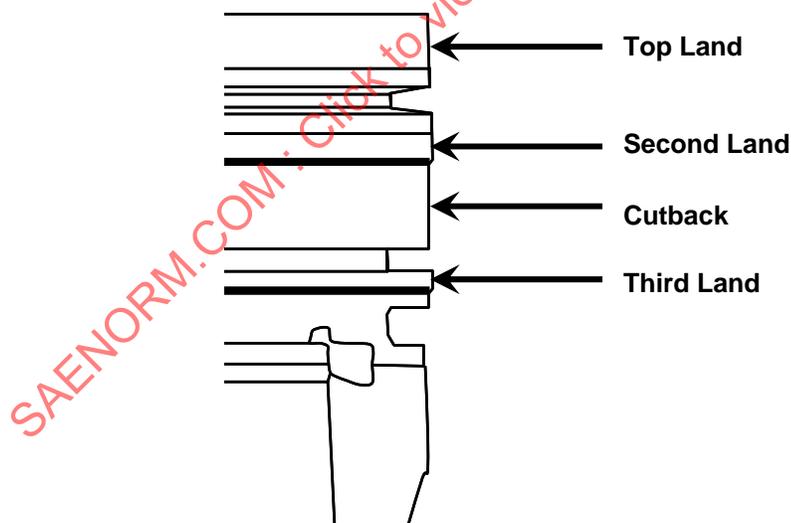


FIGURE 9 - LAND DIAMETERS

8.4.2 Piston Land Heights (Minor Effect)

The length of the piston land will affect the length of the “dry region” between the oil ring and the top of the piston. This region is more starved of oil due to the lack of a direct supply of oil from the piston skirt. With increased “dry region”, the oil film thicknesses on the cylinder bore will be reduced which can lead to an increase of friction.

8.4.3 Piston Land Axial Profiles (Major Effect)

Typically the top of the piston will have higher temperatures than the lower regions. Therefore the piston lands are typically profiled where the upper lands are cut back more than the lower lands to compensate for the higher temperatures. If the profile of the land is incorrect, land contact to the bore can occur will lead to increased friction. Excessive thermal growth of a land may cause upward scraping of the oil by the land and result in increased friction also due to reduced film thicknesses on the bore.

Land profile can be cylindrical, tapered, balcony, or barrel shaped.

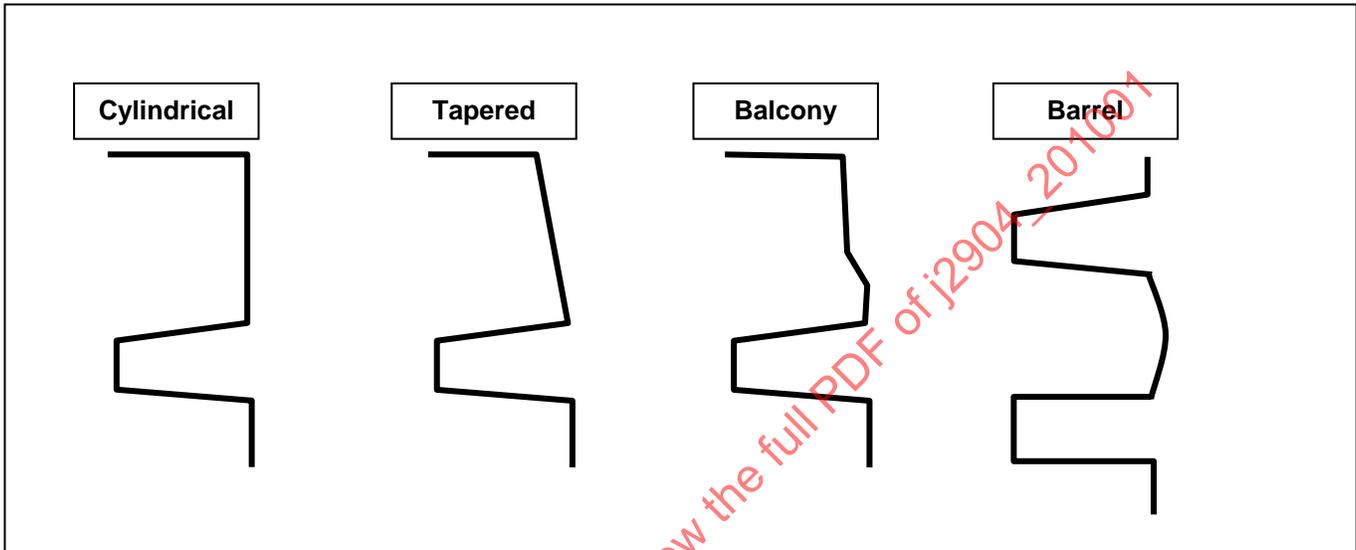


FIGURE 10 - LAND PROFILES

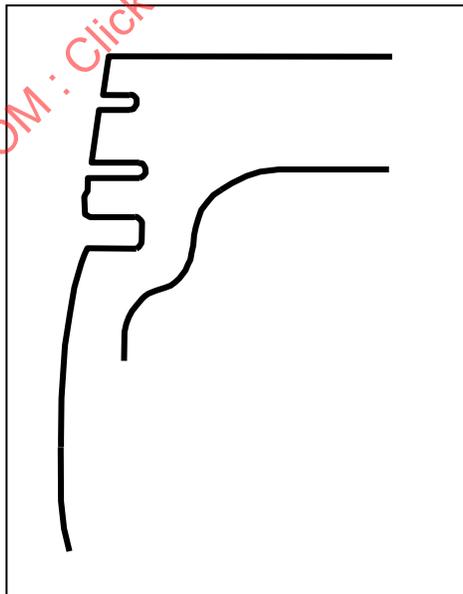


FIGURE 11 - LAND AND SKIRT PROFILE EXAMPLE

8.4.4 Piston Land Circumferential Profiles(Major Effect)

At times, ovality is necessary on the piston lands to compensate for the thermo-mechanical deformations of the piston and to enhance such things as scraped oil drainage and inter-ring gas pressure. The bore can also deform into an oval shape during operation. The ovality of the piston should be chosen to provide adequate clearance for the piston in the bore under these conditions. If there is insufficient ovality, increased land contact to the bore can occur towards the pin axis which will increase friction.

On an articulated piston and some monoblock designs, the second land is the guiding land and should have the appropriate ovality to stabilize the piston. If the ovality is excessive, unit pressures will increase in the thrust plane on the second land resulting in increased friction.

8.4.5 Piston Land Coatings (Minor Effect)

If during the motion of the piston, a piston land contacts the cylinder bore, there may be a potential benefit to adding a coating on the piston land to reduce friction. Contact can be identified by polishing on the land after running in the engine.

8.4.6 Piston Guidance by a Land (Major Effect)

The piston may be guided by one of the lands depending on the piston design. An articulated piston will have one guiding land because of its design. The one piece piston is typically guided by the skirt but can at times have a contribution from a land. The profile of this land is important because it will interact with the oil film and as a result affect friction. Land profile can be cylindrical, tapered, balcony, or barrel shaped.

8.4.7 Accumulator Grooves (Minor Effect)

Some engines will have a large land diameter directly under the ring to restrict the gas flow. This is followed by cutback area or accumulator volume. Oil and gases can then accumulate in this region rather than migrate upward to the top ring. A large second land volume may decrease the second land pressure, enhancing the seating of the top ring. Typically, it will also reduce blow-by. The effect on friction will be small. Its affect will be proportional to how the oil film conditions change on the cylinder bore. With reduced blow-by and improved ring stability, oil film thicknesses may increase on the bore and friction may reduce.

SAENORM.COM : Click to get the full PDF of J2904 - 201001

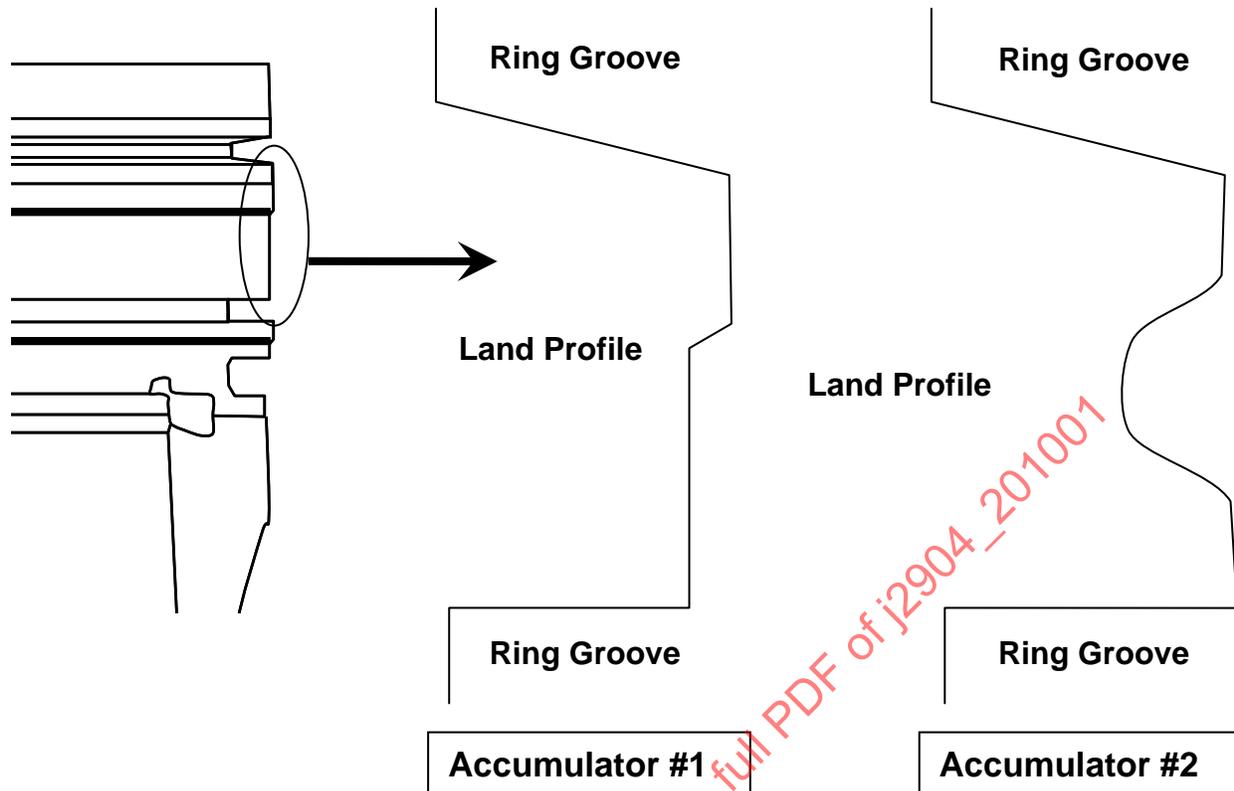


FIGURE 12 - LAND ACCUMULATOR GROOVES

8.5 Oil Drain

8.5.1 Oil Drain Holes (Minor Effect)

Oil drain holes are typically placed in the back of the oil ring groove to allow for oil that is being scraped by the oil ring to drain back to the sump. This can be very effective for controlling oil on the bore. The effect on friction will be proportional to the effect it has on oil film thicknesses.

8.5.2 Oil Drain Slots (Minor Effect)

Slots may be located directly under the oil ring to enhance the oil drainage rather than oil drain holes. The slots will typically extend to the back of the oil ring groove. The slots are typically located in the window regions of the piston. This allows oil then to drain down the sides of the piston.

For three piece oil ring care must be taken in the use of drain backs grooves. The gap end from the bottom rail of the oil ring assembly may protrude into and become stuck in the drain back groove.

The effect on friction will be proportional to the amount of oil on the bore.

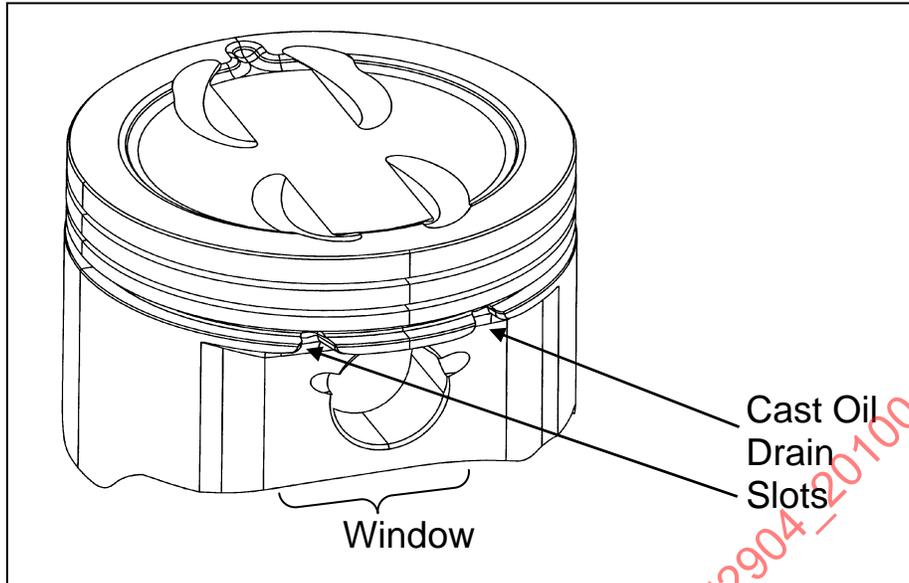


FIGURE 13 - OIL DRAIN TRANS SLOTS

8.5.3 Trans Slots (Major Effect)

Trans slots may be located at the back of the oil ring groove as shown in the figure below. These slots are used to drain oil. Many of the new modern engines that are being designed will not have Trans Slots. This is because the modern engine have higher cylinder pressures and the Trans Slots tend to reduce the strength of the piston.

These slots will affect the rigidity of the piston skirt which will have a direct affect on the piston secondary motion and skirt load distribution; which will affect the friction on the skirt.

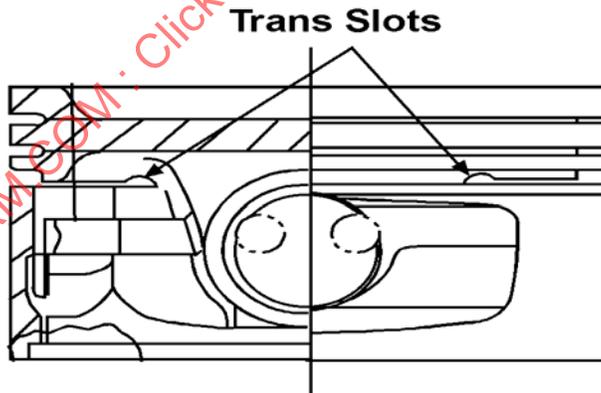


FIGURE 14 - OIL DRAIN SLOTS

8.5.4 Drain along Sides of the Piston (Minor Effect)

In some cases there are no oil drain holes or slots. Oil that is scraped by the oil ring then must drain past the piston. To enhance this flow it may be possible to increase the ovality of the piston or create windows on the sides of the piston in the pin axis to promote oil flow along the sides of the piston. As the ovality is increased, or if windows are added to the piston, the wetted area available for supporting the thrust loads can be reduced. Friction will be affected by changes in the unit loads along the skirt.

Friction will be also affected by the oil film thicknesses on the bore which will be determined by the effectiveness of the oil drains along the sides of the piston.

8.5.5 Oil Drain to the Pin Bore (Minor Effect)

Some pistons have oil drain holes that are meant to help lubricate the pin bore. Friction on the pin will be affected by the oil availability.

8.6 Piston Skirt

8.6.1 Piston Guidance or Piston Secondary Motion(Major Effect)

The skirt will guide the piston in the bore. The stability of this guidance is determined by the piston secondary motion or lateral/tilting motion in the cylinder bore. The secondary motion affects the kinetic energy due to piston slap and the load distribution along the skirt. As the impact energy and unit loads change, friction will be affected. Additionally, if the piston moves such that the top land scrapes the cylinder wall then high friction can result.

8.6.1.1 Skirt Rigidity (Major Effect)

The stiffness of the skirt plays a direct role in how loads are distributed along the skirt and therefore affect friction. The secondary motion is affected by the rigidity of the piston skirt as well as the rigidity of the bore. The rigidity of the piston skirt is affected by the piston type, reinforcements/strutted, thickness, and material.

8.6.1.2 Pin Offsets (Major Effect)

A piston pin offset can significantly affect how the piston moves within the cylinder bore and affects the connecting rod angle thus affecting the component of force acting laterally on the piston skirt (the thrust force) and as a result may significantly affect friction.

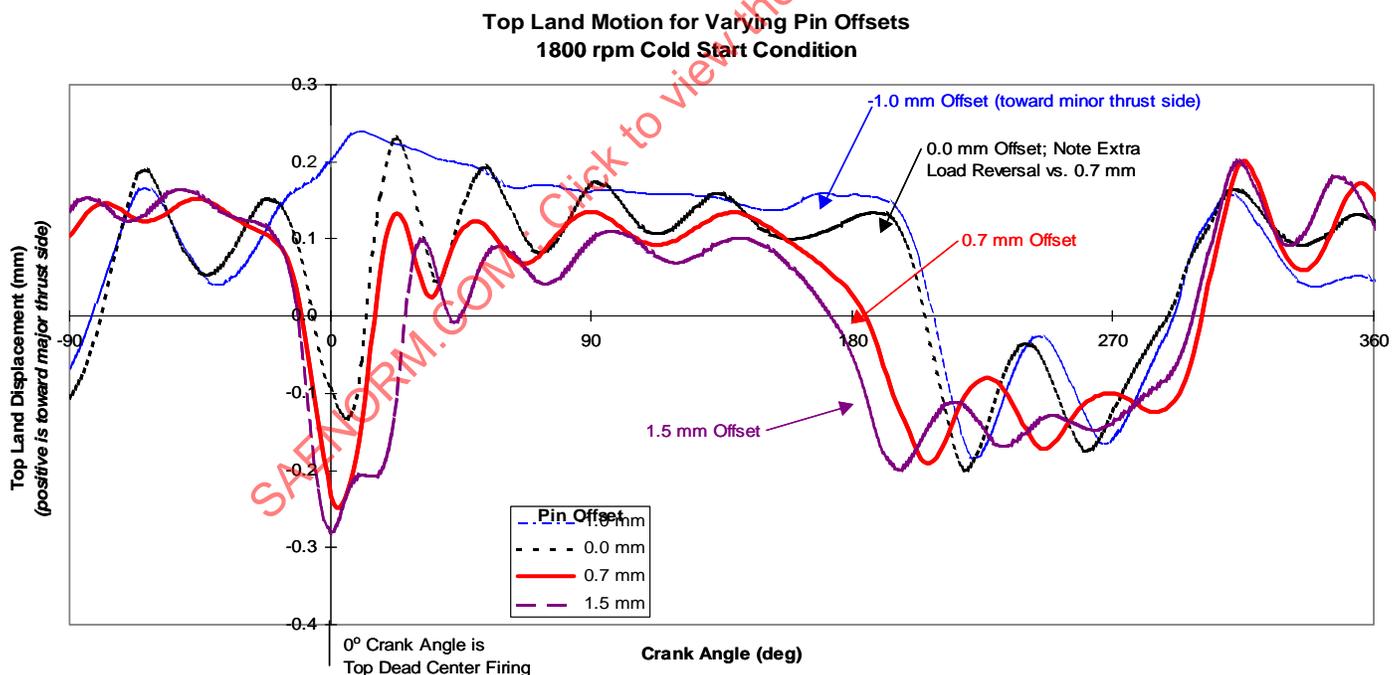


FIGURE 15 - EXAMPLE OF THE EFFECT OF PIN OFFSET ON PISTON MOTION

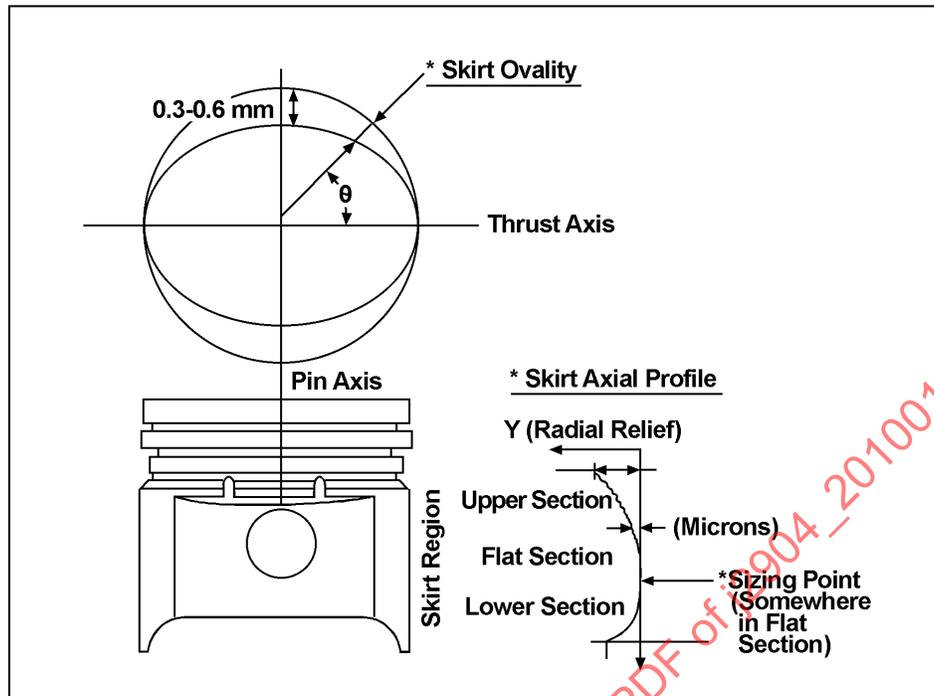


FIGURE 16 - PISTON PROFILES

8.6.1.3 Skirt Major Diameter (Major Effect)

The clearance between the piston and the bore affects the unit loads on the piston and oil film thicknesses. Additionally, the clearance will also affect the piston secondary motion and impact forces. Also, as the clearance changes, the load distribution on the skirt profile changes. The major diameter of the skirt therefore affects friction significantly.

8.6.1.4 Skirt Axial Profile (Barrel) (Major Effect)

The axial profile of the skirt is designed to create good hydrodynamic lubrication with the bore to minimize contact wear while providing guidance for the piston to minimize secondary motion. An optimized profile will maximize the portion of the engine cycle that the piston skirt remains in the hydrodynamic lubrication regime. The friction coefficient for hydrodynamic lubrication can be one tenth of the friction coefficient for boundary lubrication due to the effects of asperity contact. If the contact wear increases, or if the secondary motion increases, friction can increase.

The piston will typically be designed with an axial profile so that the diameter is larger in the lower regions of the skirt than at the top. This is done primarily for thermal expansion. However, this may also allow the skirt to ride over the oil film going up and scrape oil downward as the piston is moving down. These features will affect friction.

Piston profiles can also affect noise (croaking). Therefore, the profile needs to be designed for good piston stability, oil lubrication, and noise.

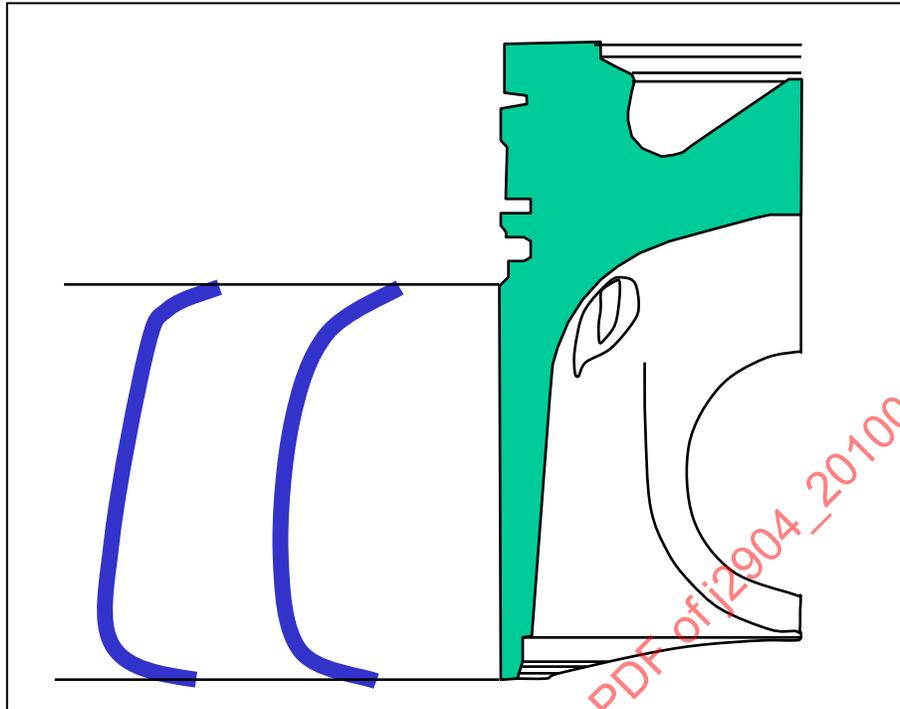


FIGURE 17 - SKIRT AXIAL PROFILES

8.6.1.5 Circumferential Contour (Cam or Ovality) (Major Effect)

The circumferential contour will affect the width of the contact zone on the skirt and directly affects the unit loads. If the unit loads increase enough to cause asperity contact, friction will increase.

The circumferential contour will affect how oil may drain downward after being scraped by the oil ring. Therefore, how the oil will drain past the piston through the circumferential contour will affect friction.

Offset of the axis of ovality can reduce the conformance of the piston to the cylinder bore and increase friction.

Offset of the axis of ovality can induce off plane forces on the rings as the piston is mis-guided through the cylinder thus allowing lift off of the rings from the piston groove face(s).

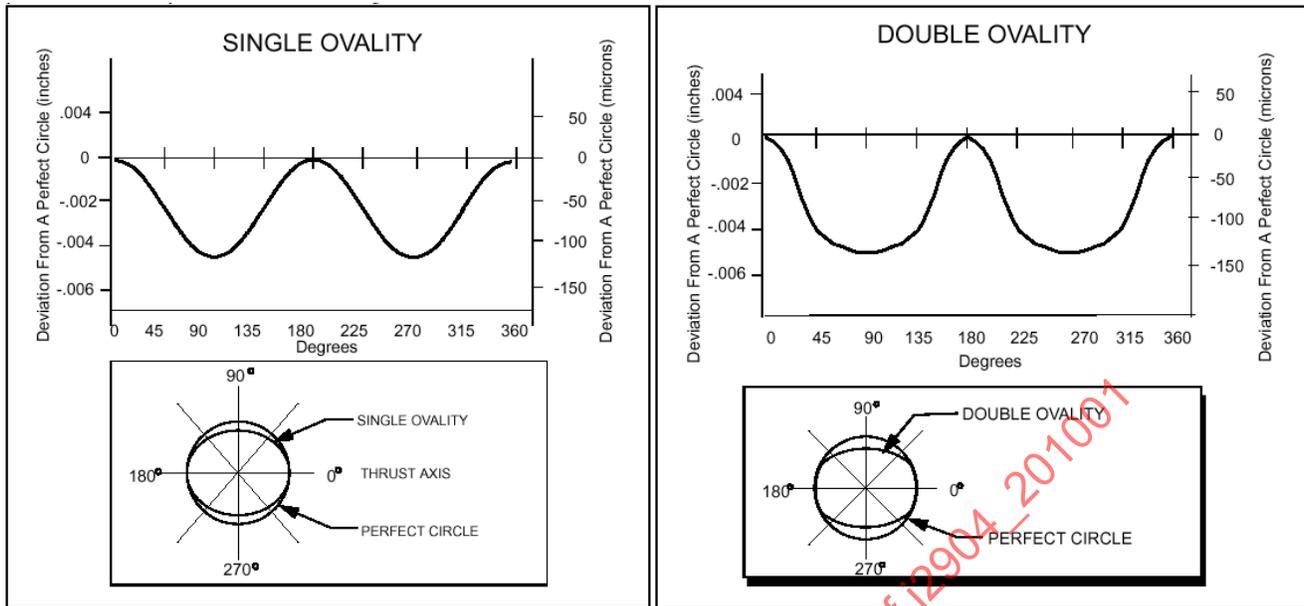


FIGURE 18 - SKIRT CIRCUMFERENTIAL CONTOURS

8.6.2 Skirt Size (Major Effect)

The size of the skirt can be defined by the length of the skirt, and the width if the piston has a skirt pad (as defined with window features). The skirt size will affect the unit loads on the skirt which affects friction. Additionally, the size of the skirt will also affect the surface area available for friction and affect the area of oil film sheared as the piston moves up and down the bore.

8.6.3 Skirt Flexibility (Medium Effect)

The skirt flexibility will affect how the oil film between the piston and the cylinder wall develops. If the skirt is too stiff, then the skirt will tend to break through the oil film in the center of the skirt. If the skirt is too flexible, it may collapse in the center causing the skirt to break through the oil film on the edges where the pin bore makes the skirt become stiff again. When the piston skirt and the cylinder bore contact, friction will increase. Adjusting the flexibility to reduce contact will improve friction.

8.6.4 Skirt Surface Finish (Medium Effect)

If the asperity heights of the surface finish are high relative to the available oil film thickness, friction due to asperity contact will occur. Therefore, surface finish on the skirt is a major effect on friction. The piston skirt surface finish will hold oil which may help promote hydrodynamic lubrication.

8.6.5 Skirt Coatings (Major Effect)

If during the motion of the piston, the piston breaks through the oil film, then piston skirt coatings may help to reduce friction by reducing the coefficient of friction between the skirt and the cylinder bore. However, if an oil film separates the piston from the cylinder bore at all times, then there will be no effect on friction.

8.6.6 Skirt Chamfer (Minor Effect)

The chamfer at the bottom of the skirt may affect the oil entrainment and lubrication of the skirt and thus might have a slight effect on friction.

The chamfer at the top of the skirt can also influence friction because of the oil reservoir that it creates.

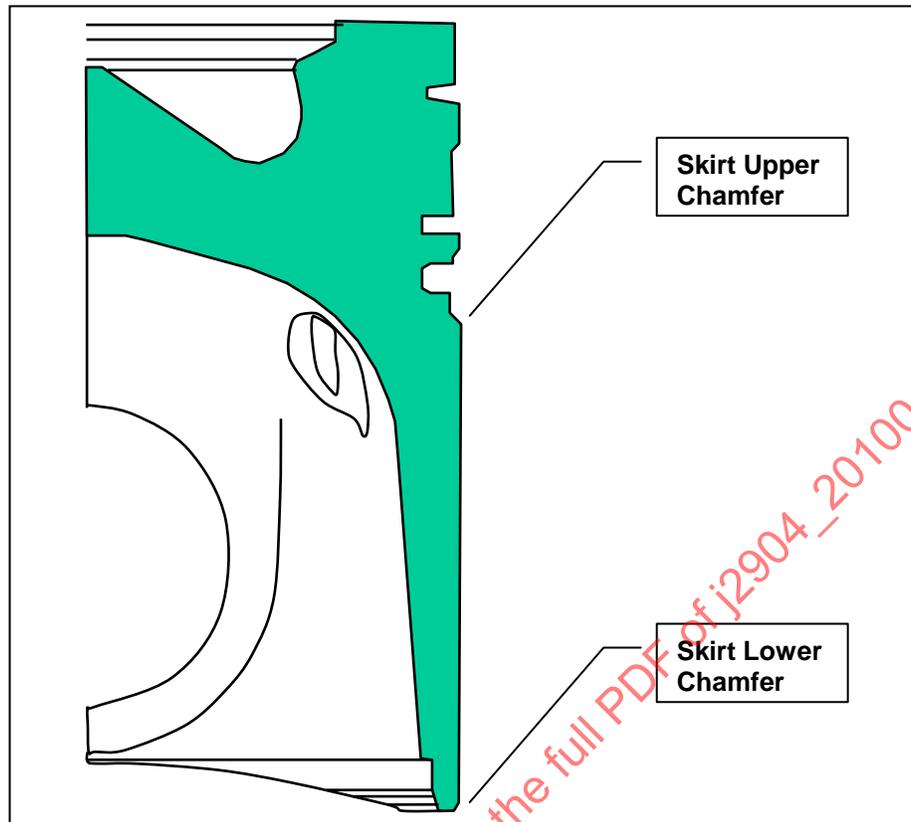


FIGURE 19 - SKIRT CHAMFERS

8.7 External Effects on Piston Friction

8.7.1 Crankshaft Offset (Major Effect)

The crankshaft offset can also affect the friction of the piston. The crankshaft offset will affect the piston secondary motion and thrust forces. By changing crankshaft offset, the cylinder pressure trace can be shifted relative to the connecting rod angle, thereby, altering the secondary motion of the piston.


8.7.2 V-angle and Bank Effects (Minor Effect)

The v-angle will affect the piston secondary motion slightly. Additionally, the bore distortion patterns between the banks on a v-engine can be different which will affect friction. In some cases the oil may become depleted on the upperside of the piston in the V. The lack of lubrication can result in higher friction and wear. In some cases, especially under cold conditions this may result in scuffing.

8.8 Piston Pin Bore

8.8.1 Unit Pressure on the Pin Bore (Medium Effect)

The unit pressure of the pin bore is defined as the total force pushing down on the piston divided by the projected area of the upper half of the piston pin bores. When unit pressure is too high, the piston will not be able to adequately support the loads. This can result in high friction and/or scuffing of the pin bore. This can result in increased friction in the pin bore. If this affects the motion of the piston, then the friction between the piston and the cylinder bore can be affected. Scuffing is an indication of very high friction.

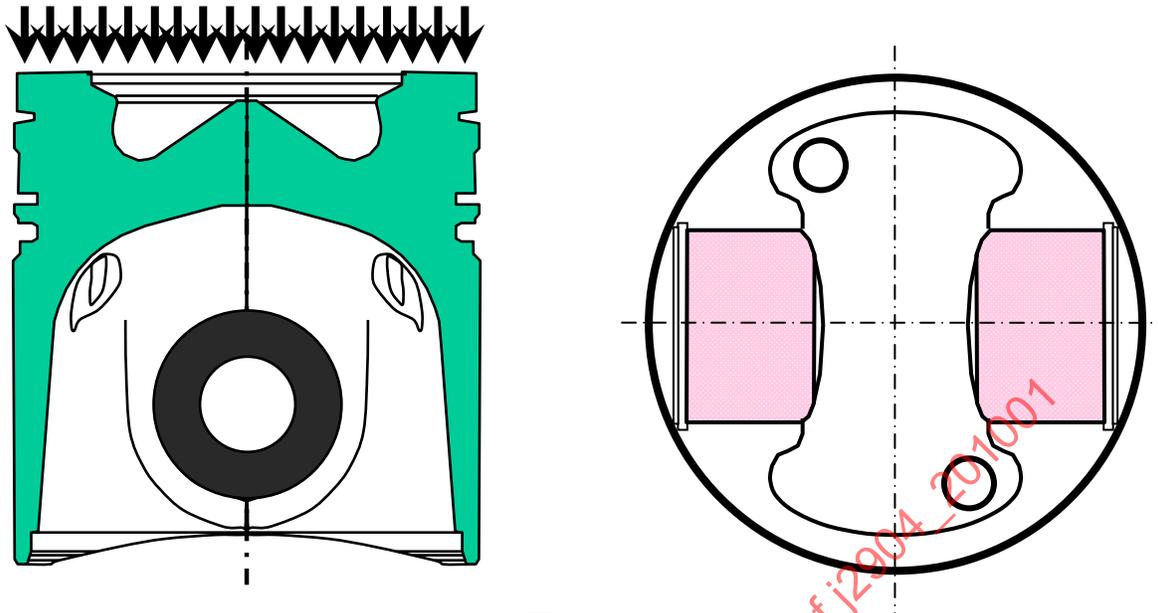

$$\text{Unit Pressure} = \frac{\text{Force}}{\text{Area}}$$

FIGURE 20 - ILLUSTRATION OF THE UNIT PRESSURE CALCULATION

8.8.2 Pin Bore Design (Medium Effect)

The pin bore design will significantly affect the loading ability of the pin bore and as a result affect pin bore friction. See examples of pin bore designs below.

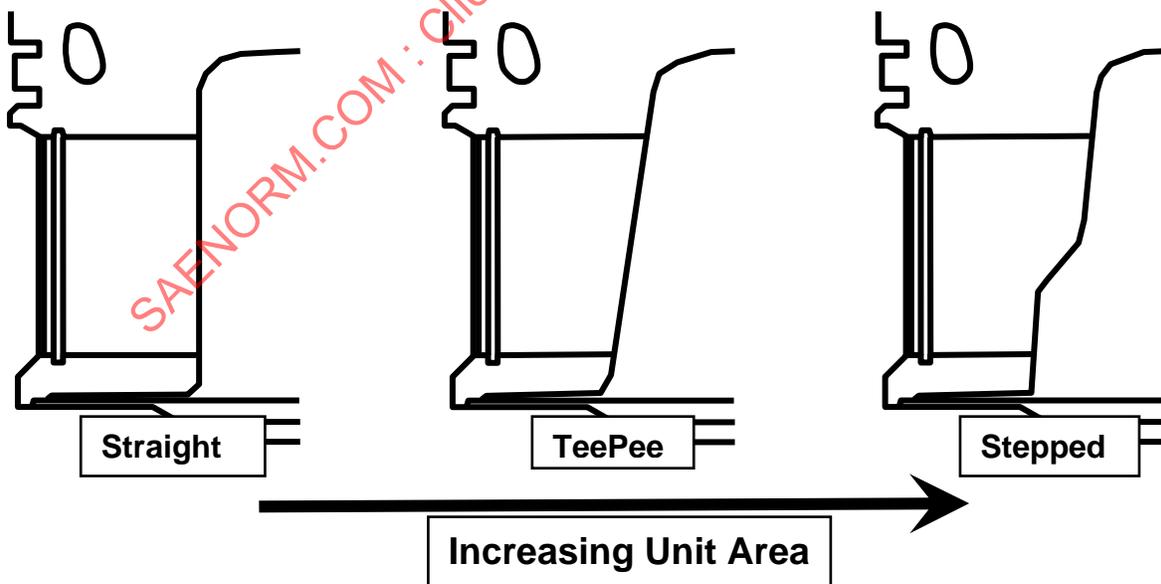


FIGURE 21 - EXAMPLES OF PIN BORE DESIGNS

8.8.3 Axial Piston Pin Bore Profile (Medium Effect)

Profile of the piston pin bore will affect how the loads are distributed. Regions of high contact pressure may result in high friction and/or scuffing and pin seizure.

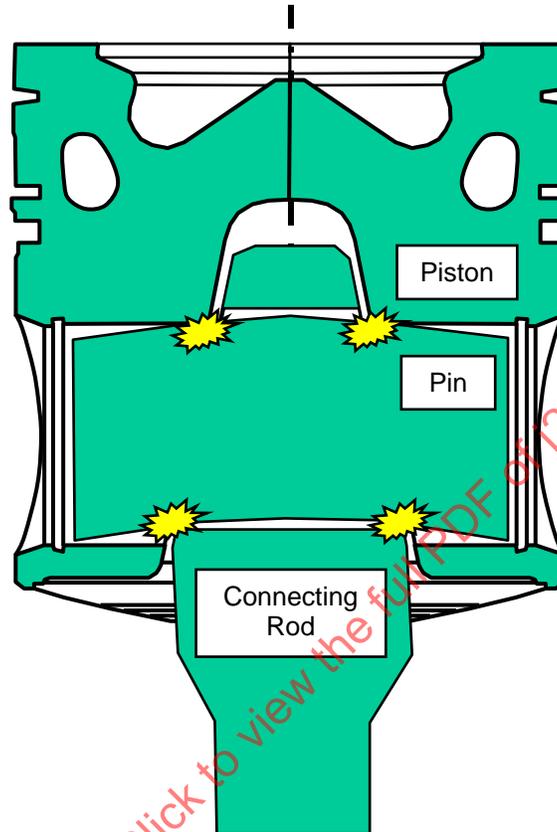


FIGURE 22 - EXAMPLES OF PIN BORE CONTACT LOCATIONS

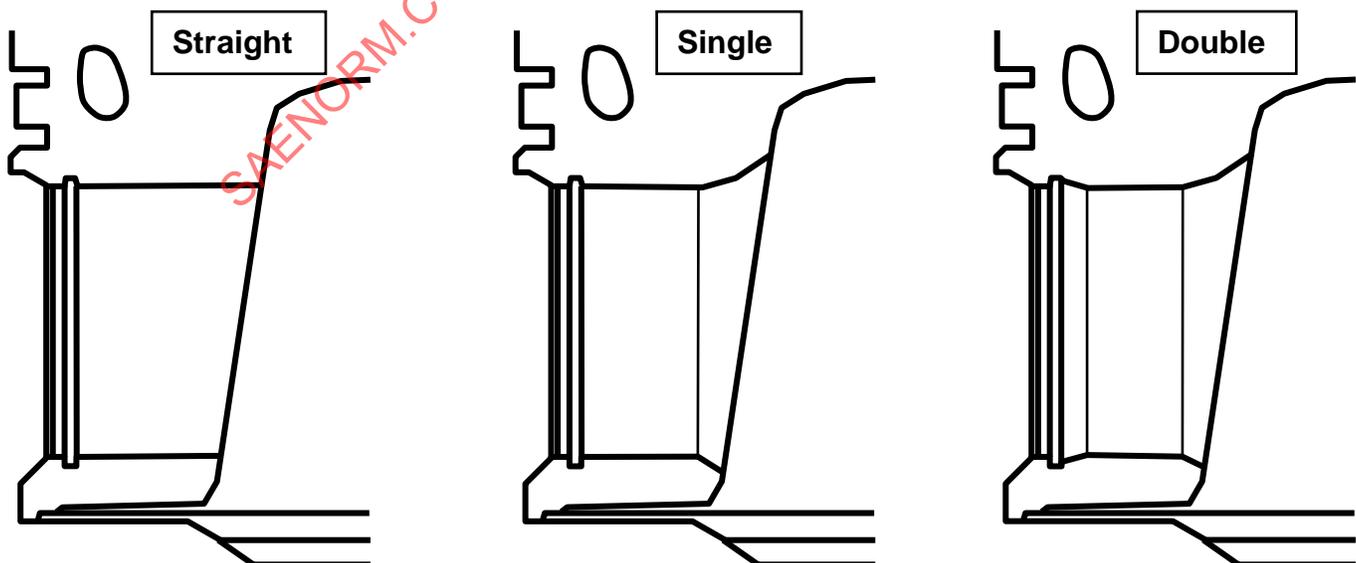


FIGURE 23 - EXAMPLES OF DIFFERENT PIN BORE AXIAL PROFILES

8.8.4 Circumferential Piston Pin Bore Profile (Medium Effect)

The circumferential profile of the pin bore will affect how well the pin bore is lubricated and also the circumferential loading patterns on the pin bore. This will affect pin bore friction. If it affects piston motion, then it will affect piston to cylinder bore friction.

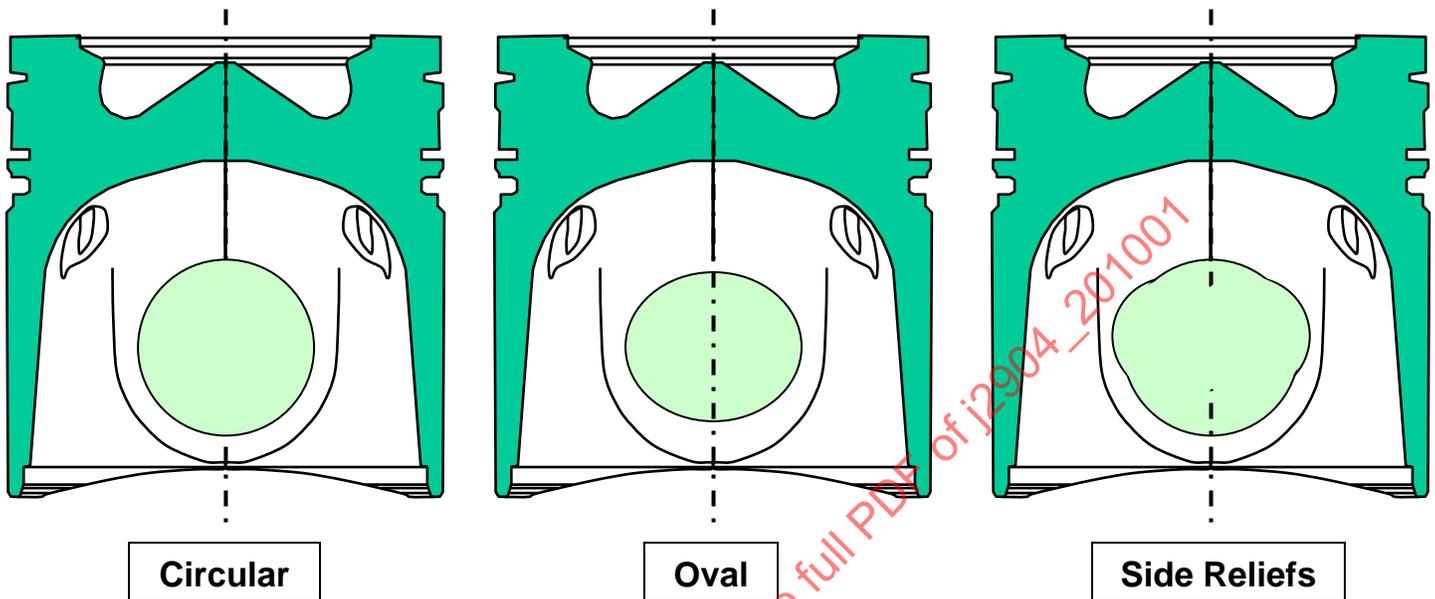


FIGURE 24 - EXAMPLES OF DIFFERENT PIN BORE CIRCUMFERENTIAL PROFILES

8.8.5 Pin Bore Clearances (Medium Effect)

The piston pin bore to pin clearances affect the lubricating film that will affect the pin joint friction. Smaller clearances will tend to lead to thicker oil films. However, if the clearance is too small, the parts can seize together.

8.8.6 Pin Bore Material Effect (Medium Effect)

The material of the pin bore can significantly affect the friction characteristics of the pin bore and also the scuffing potential. Pin bores may or may not have bushings. In Aluminum pistons, bushings are installed typically for strength reasons. In steel pistons, bushings are often installed to improve seizure resistance.



FIGURE 25 - AN EXAMPLE OF AN ALUMINUM PISTON WITH PIN BORE BUSHINGS

8.9 Piston Cooling (Medium Effect)

8.9.1 Connecting Rod Spray and Cooling Nozzles (Major Effect)

The piston may have a cooling spray under the crown of the piston or from the connecting rod (See Figure 44). It also may have a cooling gallery. The way a piston is cooled might have a major effect on friction in the following ways:

- The cooling of the piston will affect piston temperature which will have an effect on oil viscosity. If the oil's viscosity changes, the friction associated with oil shear is changed.
- The oil spray, if reduced from design levels, may increase thermal distortions of the piston which can cause high friction. This could result in higher skirt friction because of inappropriate local clearances and/or shapes.
- The oil spray that is used to cool the gallery may put excessive oil on the cylinder walls causing higher friction.

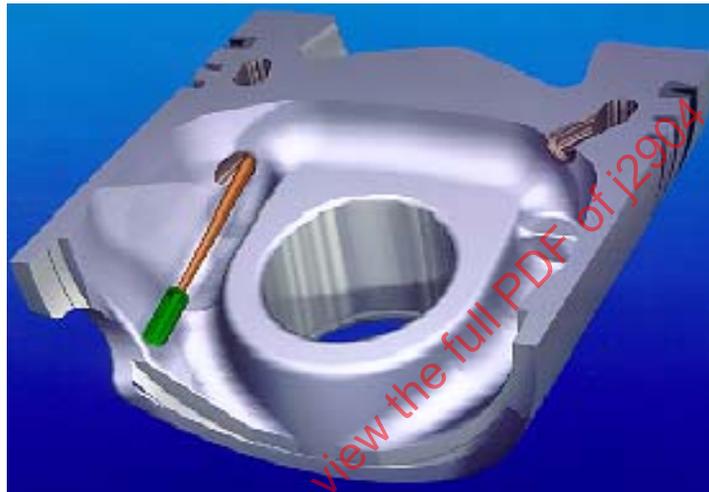


FIGURE 26 GALLERY COOLED PISTON

8.10 Piston Temperatures (Major Effect)

Friction can be turned up and down by changing coolant temperature and thus the temperature of the system. Temperature and oil viscosity are inversely related.

8.10.1 Piston Thermal Distribution

The piston thermal distribution should be addressed as a system to reduce incidences and effects of incorrect clearances, excessive wear or friction, carbon build up, and ring performance.

8.10.2 Oil Viscosities (Major Effect)

Piston temperatures will affect the oil viscosity. This will have a direct effect on friction.

8.10.3 Carbon Build Up

Carbon can build up on the piston lands. This can cause polishing of the bore surface if the carbon bridges between the piston and bore. Excessive polishing will increase friction. Sometimes a carbon scraper ring is put in the cylinder liner to scrape the carbon off the top land to prevent this carbon build up and the resultant polishing.

9. PISTON RING EFFECTS ON FRICTION

9.1 General Piston Rings

9.1.1 Circumferential Conformability (Minor Effect)

The conformability of a piston ring (compression ring or oil ring) might have an effect on friction. If the ring cannot conform to the distortions in the cylinder wall, it may result in areas of higher contact which might cause friction.

9.1.2 Surface Conditions (Medium Effect)

The surface conditions of the face of the piston ring can affect friction. Rougher and harder surfaces may result in higher friction.

9.2 Compression Rings

9.2.1 Ring Twist (Minor Effect)

A positive twist second ring may have slightly higher friction because of the increase potential to build up pressure above the ring which will push the ring outward causing more friction.

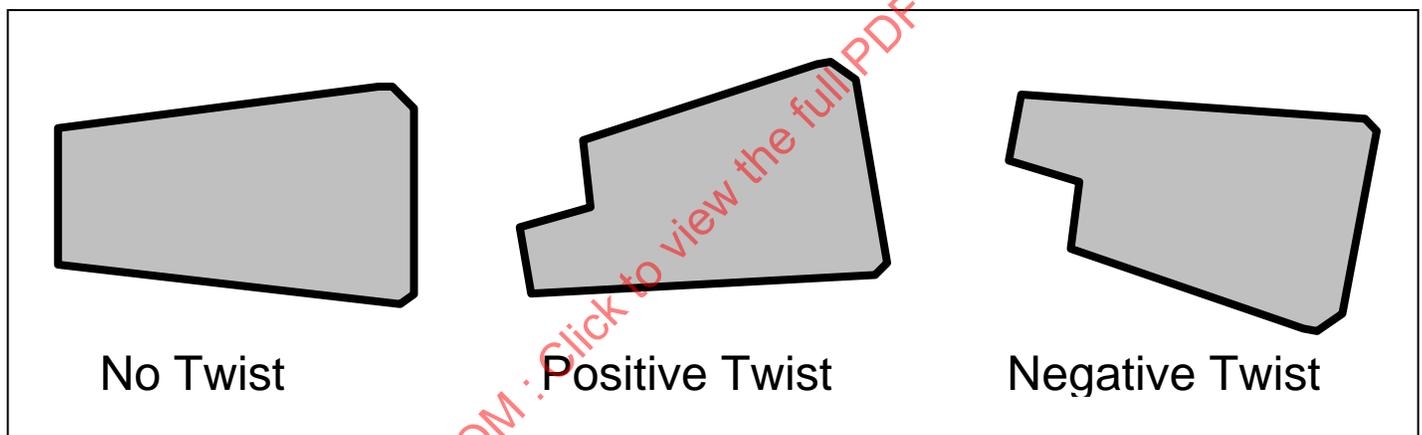


FIGURE 27 - RING TWIST TERMINOLOGY

9.2.2 Angles (Medium Effect)

The keystone ring will have a reaction force from the pressure acting on the ring in the horizontal direction (see Figure 5). This will create a higher force acting on the cylinder bore which will result in higher friction and wear than a rectangular ring.

Conventional wisdom is that rectangular ring grooves are better for oil and blow-by control. However in some cases keystone ring grooves are needed to prevent ring sticking, especially in diesel engines. If rings stick, thrust forces from the piston will be transferred to the ring. With increased thrust forces on the ring, ring friction will significantly increase.

9.2.3 Closed Gap (Minor Effect)

Closed gap will affect the pressure build-up between the rings and thus affect friction because the pressure is acting on the back of the second ring.

9.2.4 Gap Ratios (Minor Effect)

The ratio of the closed gaps will determine the pressure build-up between the rings and thus affect friction because the pressure is acting on the back of the second ring.

9.2.5 Ring Axial Width (Medium Effect)

A ring with a smaller axial width ring may have a smaller normal force and as a result less friction. This is highly dependant on the ring face design and the lubricating condition. This is because high pressure acts on the face as well as the back of the ring. It is possible that there will be no net change in friction if there is no corresponding change in the ring face (see the illustration below).

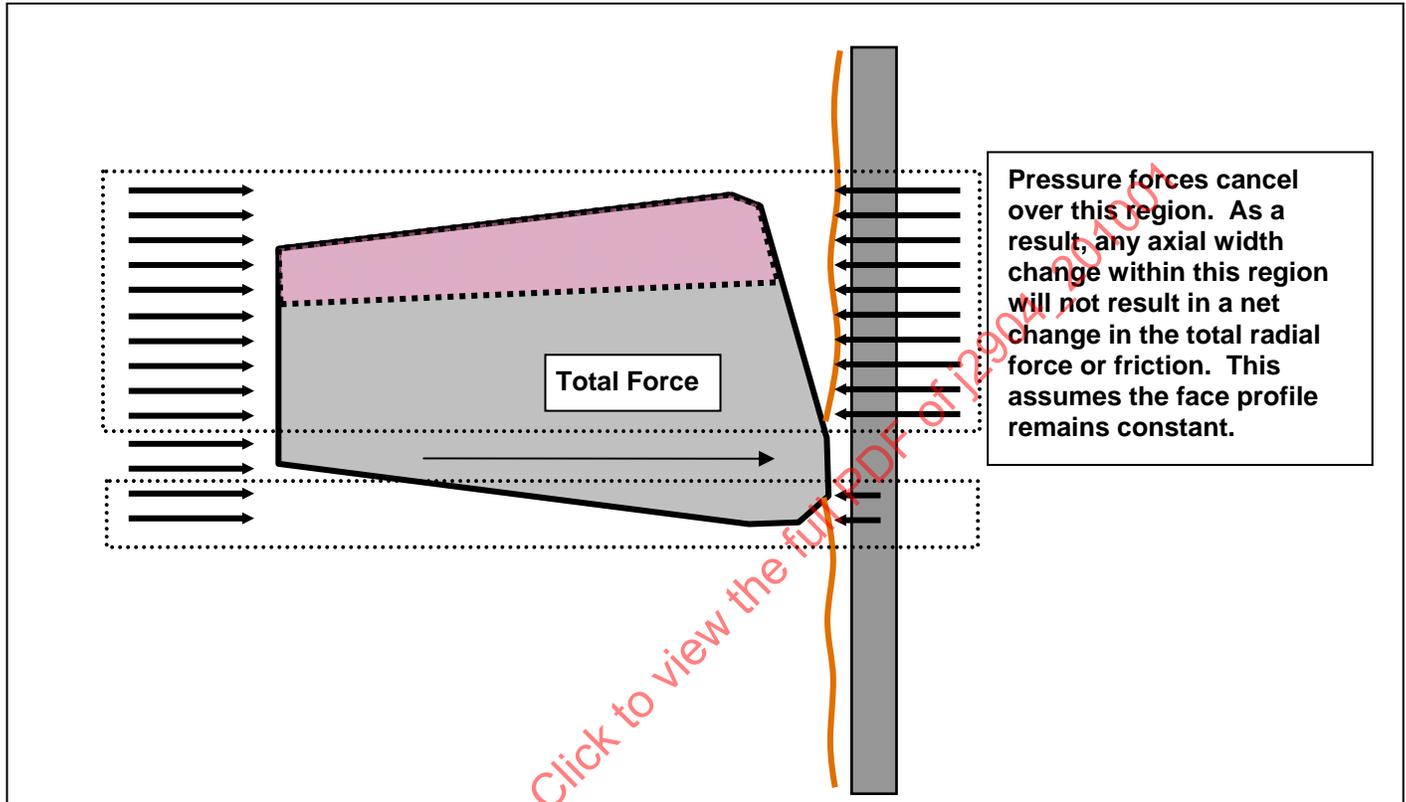


FIGURE 28 - ILLUSTRATION OF RADIAL GAS FORCES ACTING ON THE RING

9.2.6 Ring Mass (Minor Effect)

The mass of the rings is significant for the inertial forces acting on the rings. The mass of the rings will determine if the rings lift and flutter which might affect friction by affecting how the gases build up between the rings and affect the oil film thickness.

9.2.7 Ring Circumferential Shape (Minor Effect)

Piston rings in the free shape are not round. The circumferential shape is designed to give specific contact pressures around the ring. This pressure pattern will affect how a ring will contact the cylinder wall. It is possible to have a shape that will give regions of high pressure that might tend to break through the oil film. This will affect friction. The most common point of high contact is at the tips of the rings near the end gap.

An example of the calculated circumferential ring pressure pattern can be seen in Figure 29.

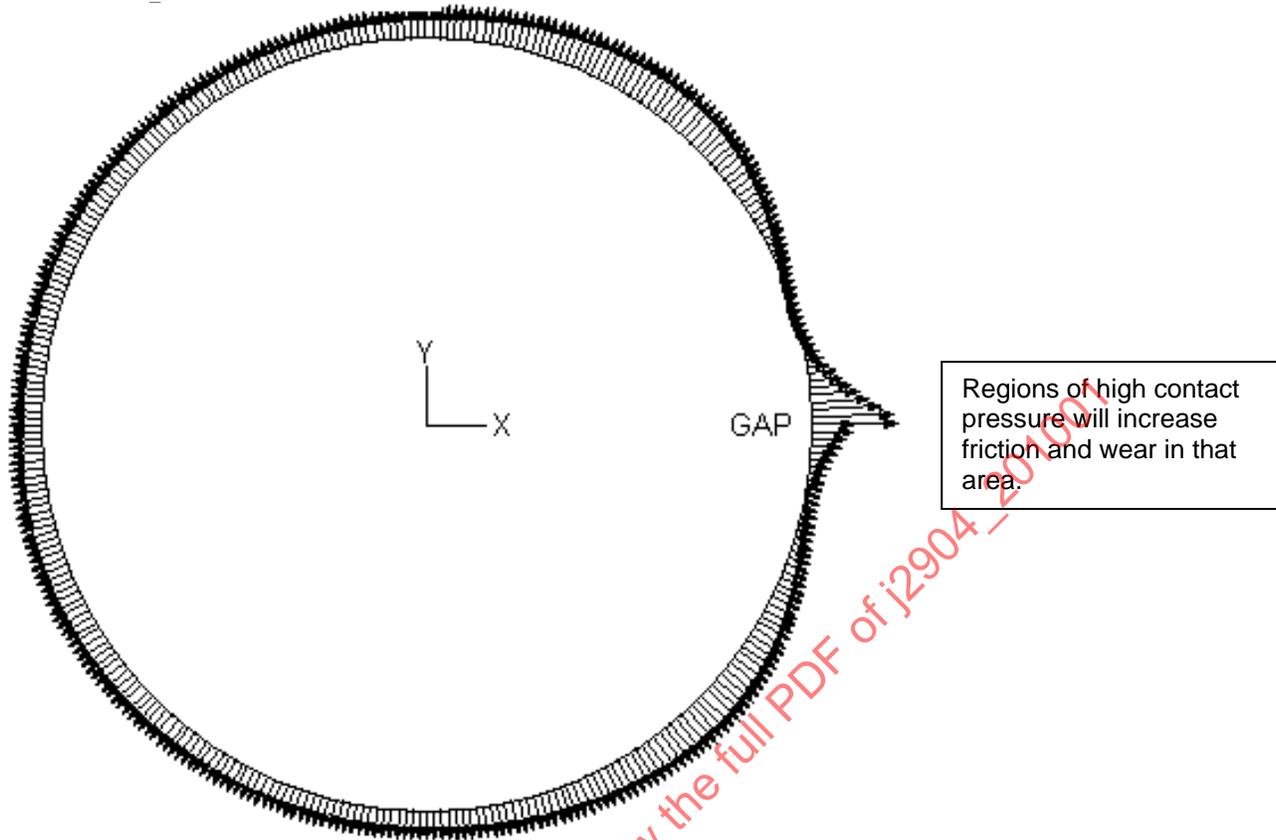


FIGURE 29 - EXAMPLE OF CALCULATED RING PRESSURE PATTERN

9.2.8 Tension of the Compression Ring (Medium Effect)

The tension of the ring is the force required to close a ring down to the bore diameter or gage diameter for the engine (See Figure 30). This represents the force exerted on the cylinder bore that is directly converted to friction. However, the contribution to friction is relatively small for diesel engines but is significant in gasoline engines at light load.

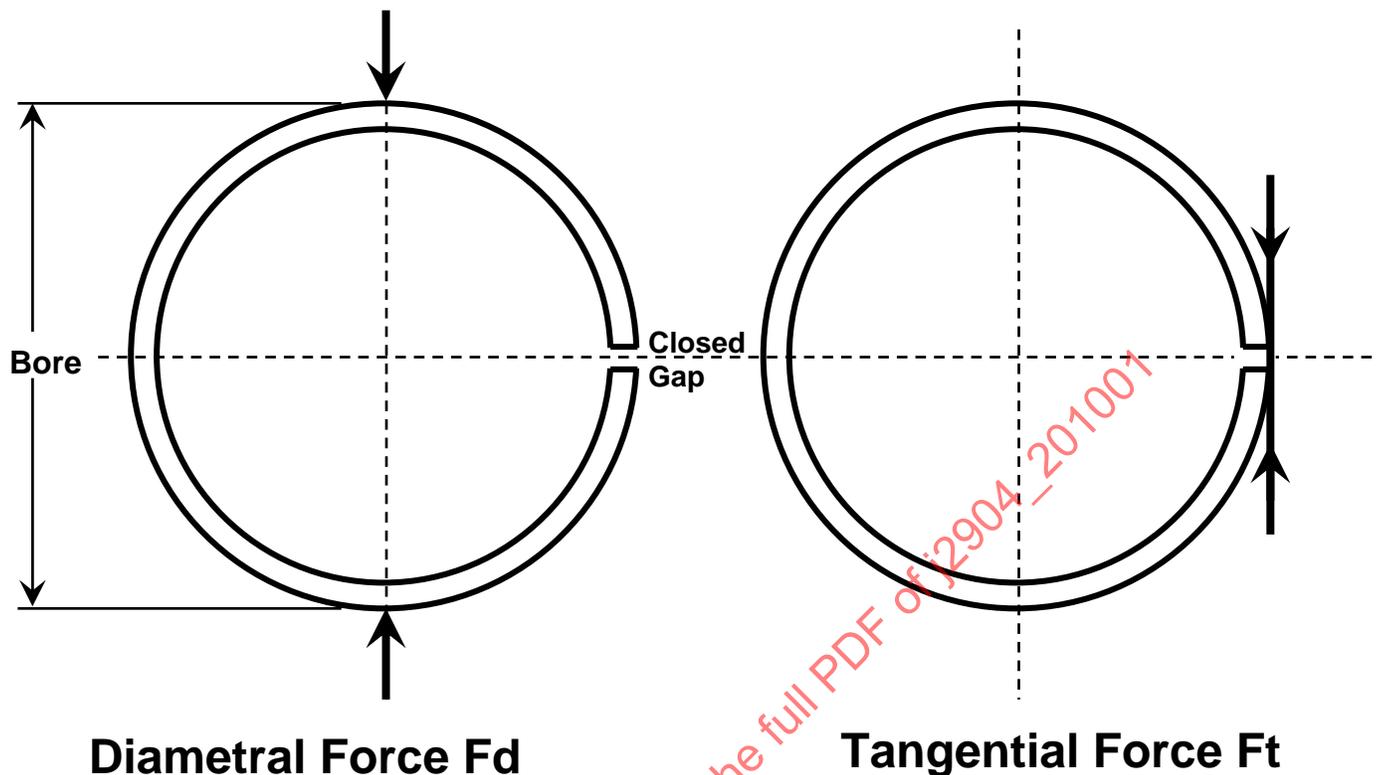


FIGURE 30 – ILLUSTRATION OF RING TENSION MEASUREMENTS

9.2.9 Face Profile (Medium Effect)

The profile of the ring face will determine the oil film that is built up between the ring and the cylinder bore. Each ring will have different profiles for different purposes.

9.2.10 Top Ring Face Profile (Medium Effect)

The top ring face will typically be barrel shaped. The top ring bears the high cylinder pressure and must be designed to develop an adequate oil film to not have excessive wear. A ring with a large barrel drop will tend to build larger oil films at mid-stroke but these films will break down easier at the ends of the stroke. Conversely a ring with small barrel drop will not develop as thick oil films at the mid-stroke but will result in thicker oil films at the ends of the stroke because of the squeeze film effect.

The highest friction forces occur near Top Dead Center (TDC) and this results in wear. However, friction power loss is friction force multiplied by speed. The speed is very low so the power loss is also low. At the mid stroke, the oil films are thicker so the friction force is smaller, but the velocity of the ring is higher. This affects friction power loss or fuel economy.

An offset barrel towards the bottom side of the ring face is sometimes used to promote oil scraping downward. This will affect the oil film and as a result the friction. Also, the higher barrel drop on the top side will allow high pressures to act on the face of the ring and counteract some of the net pressure acting on the ring. Therefore the friction and wear may be reduced.

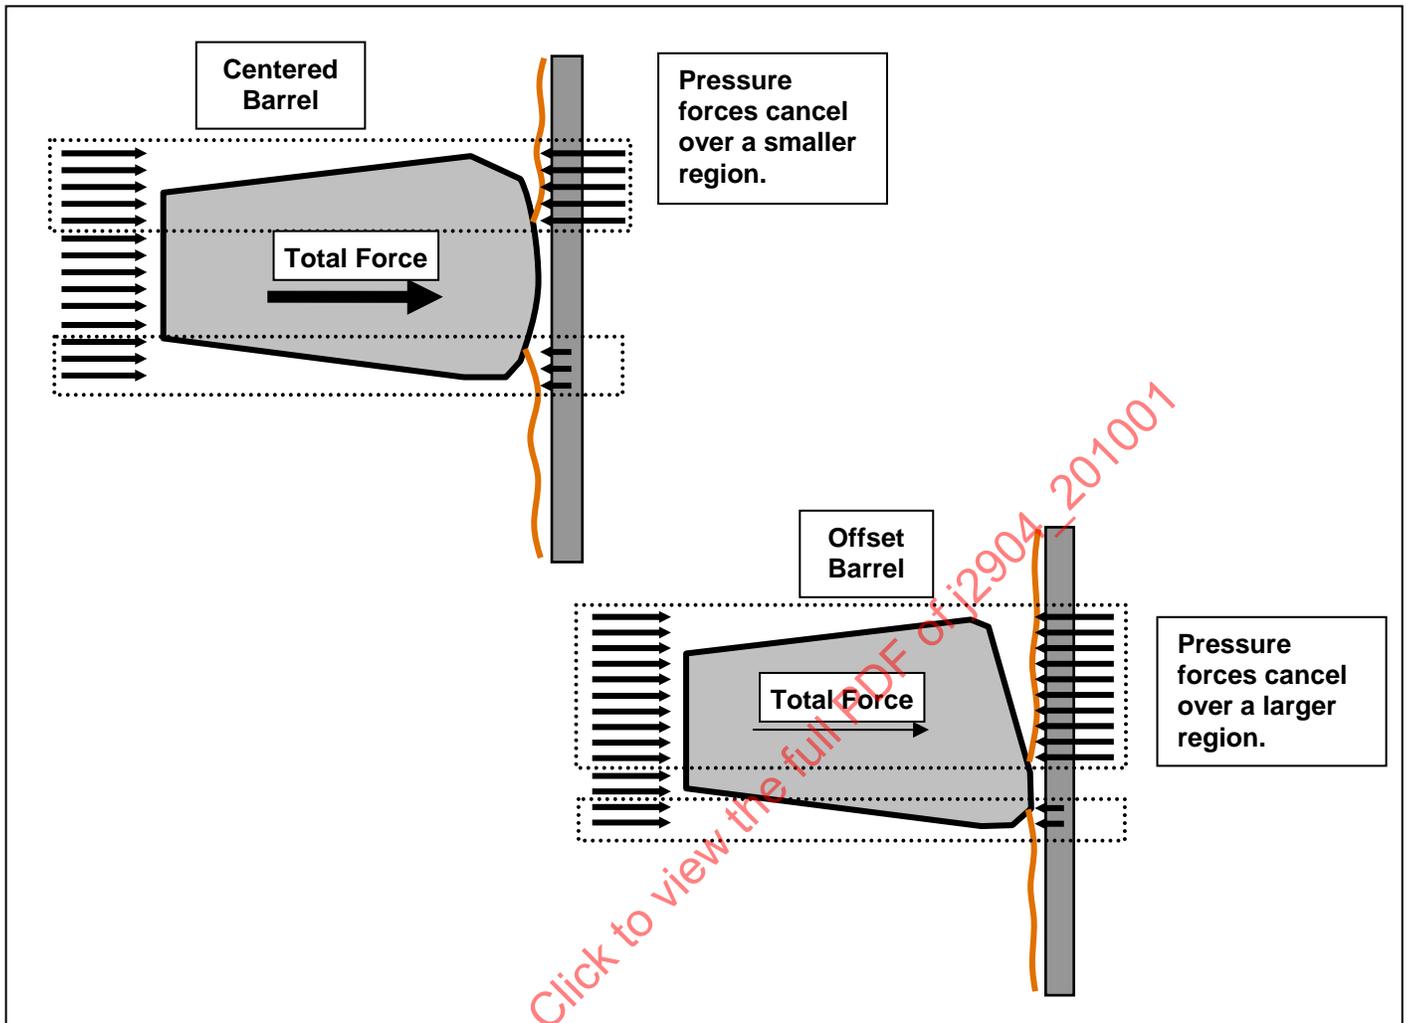


FIGURE 31 - EFFECT OF FACE PROFILE ON NET FORCE ACTING ON THE RING

9.2.11 Second Ring Face Profile (Medium Effect)

The second ring is not exposed to the high cylinder pressure so a ring with a more aggressive oil scraping role can be used. The taper is designed to scrape oil as the ring moves down in the stroke and ride over the oil films on the way up. The purpose for this design is the net effect of scraping oil down away from the top ring. Therefore, the main effect of the taper faced second ring occurs when the ring is moving down because the ring is breaking through the oil film to scrape the oil downward. However, the overall friction of the second ring is not very large.

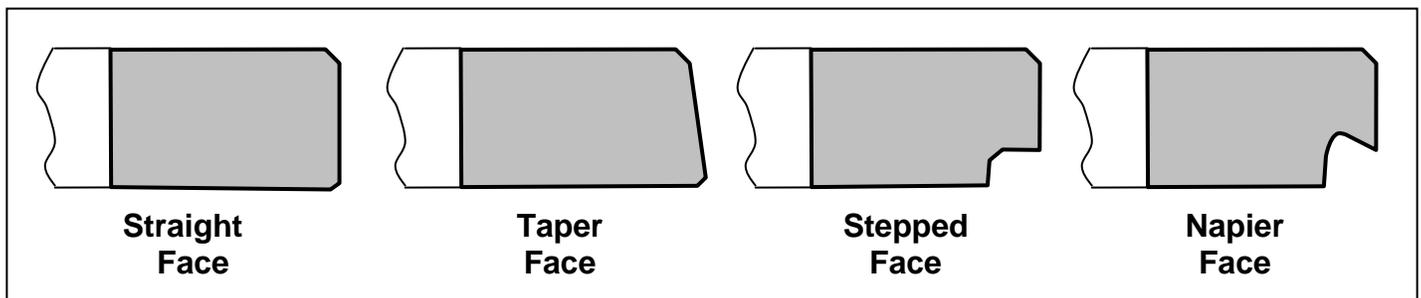


FIGURE 32 - SECOND RING FACE PROFILES

9.2.12 End Gap Chamfer (Minor Effect)

The end gap chamfers of the rings help to form the orifice through which gases flow. Therefore this can affect the build-up of pressures between the rings and thus affect friction. However, the effect will be relatively small.

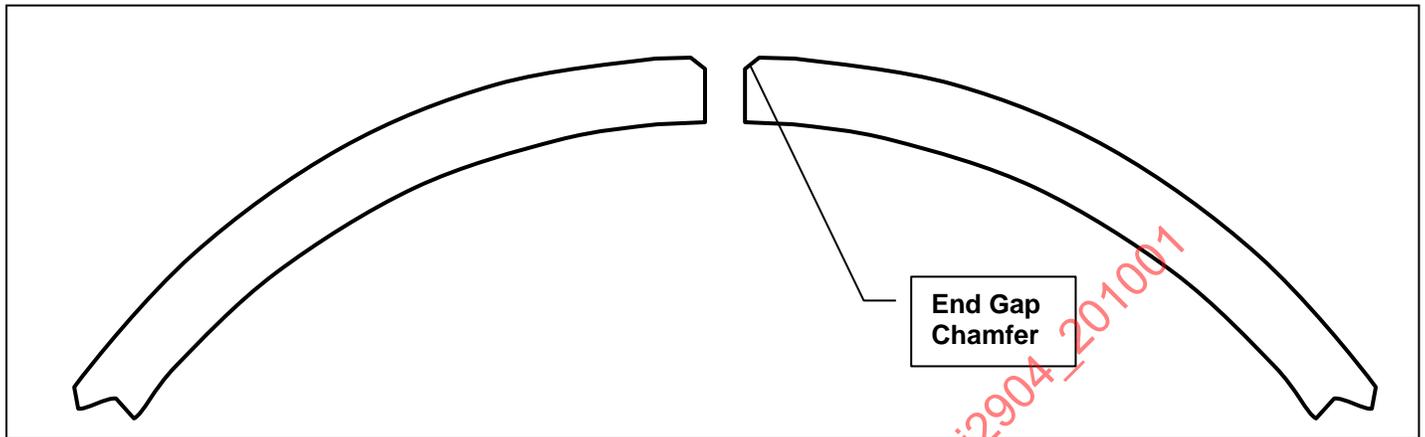


FIGURE 33 - END GAP CHAMFER

9.2.13 OD Chamfers (Minor Effect)

The bottom outside diameter chamfer on the ring face may affect the oil film developed. A sharp bottom side edge, particularly on the second ring, may break through the oil film and affect friction. Since the effect of friction is small, the benefit that this gives for oil consumption may make this feature desirable. Figure 34 shows a schematic of the OD chamfer.

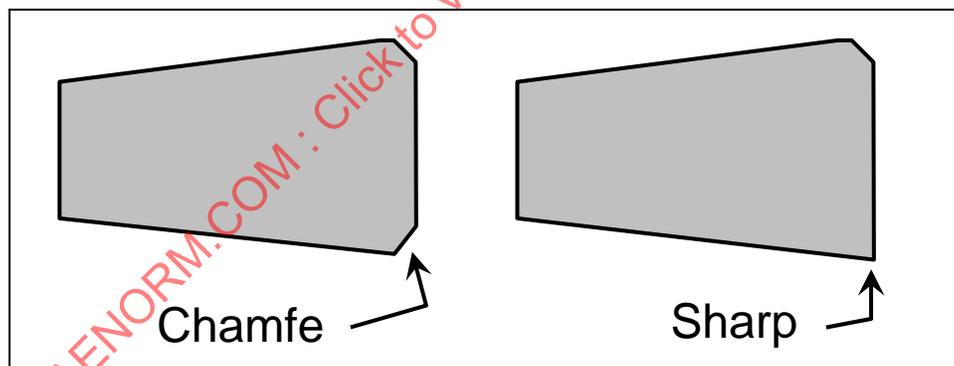


FIGURE 34 - SCHEMATICS OF BOTTOM SIDE OD CHAMFERS

Figure 35 shows different types of ring coatings. Typically, it is possible to get a sharper bottom outside diameter chamfer on rings with the semi-inlaid or inlaid coatings. The "inlaid" processing easily accommodates the sharp bottom corner because the bottom edge is the base iron material. If a coating is on the lower edge, a larger chamfer is typically required.

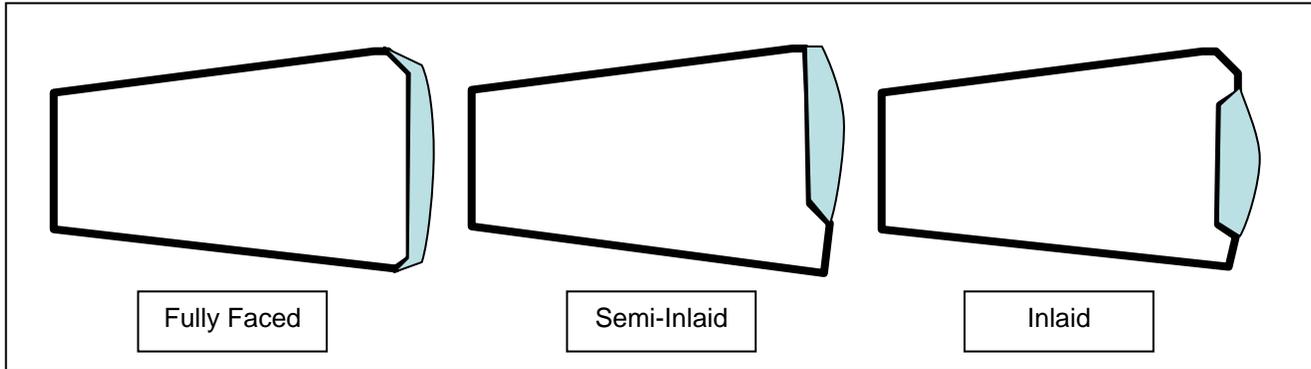


FIGURE 35 - RING COATING APPLICATION EXAMPLES

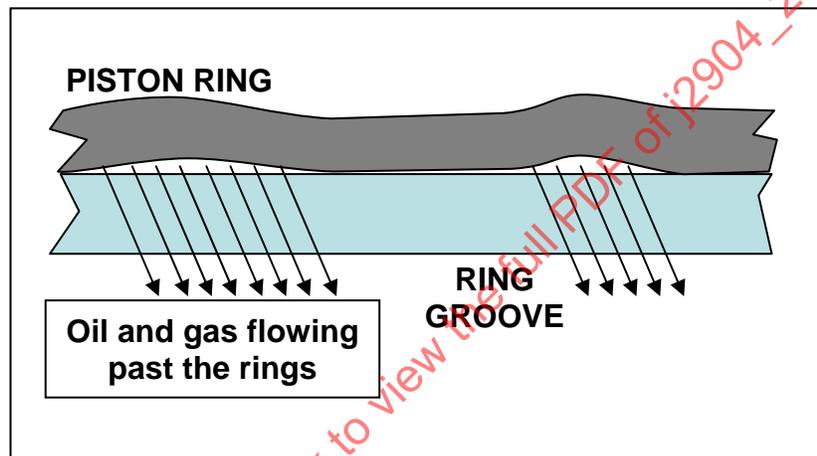


FIGURE 36 - WAVY RING EXAMPLE

9.2.14 Waviness (Chatter) (Minor Effect)

Circumferential side face waviness affects how the ring seals with the piston ring groove. Excessive waviness will create flow paths for oil and/or gases to pass by the ring. How this affects the pressure acting on the rings and the resultant oil film thickness will determine the effect on friction.

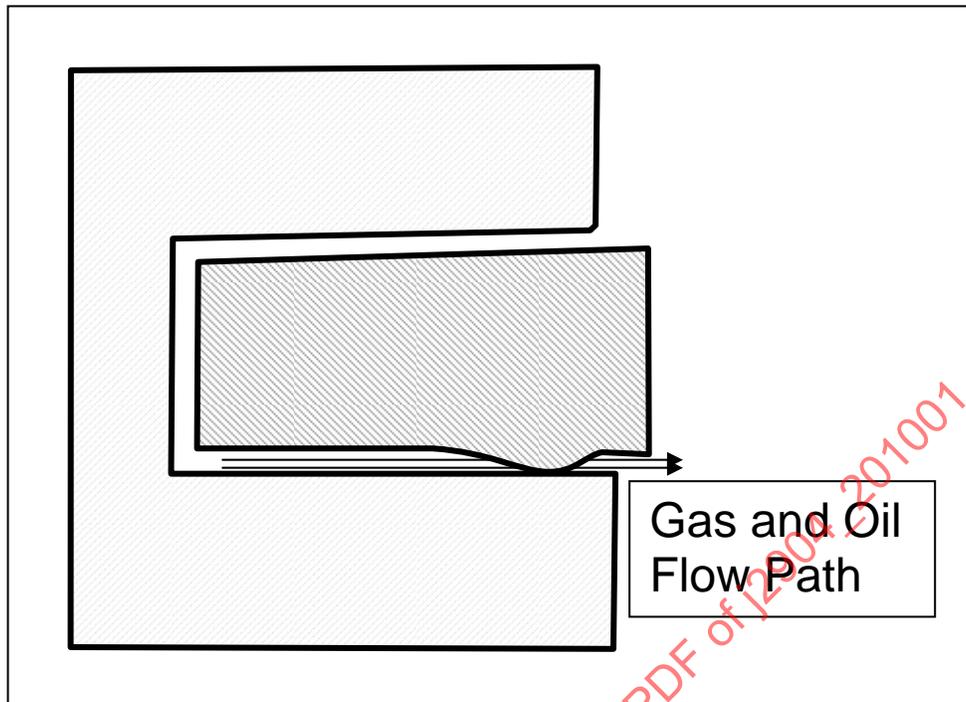


FIGURE 37 - RING STRAIGHTNESS EXAMPLE

9.2.15 Straightness (Minor Effect)

If the bottom side is not straight, oil and gas leakage flow paths may be formed. If this affects the pressure acting on the rings and the oil film thickness, then it might have a small effect on friction.

9.2.16 Roughness (Medium Effect)

The roughness of the ring face will affect friction when there is contact between the ring and the cylinder bore. This typically occurs at Top Dead Center. Higher roughness will result in higher friction.

9.3 Ring Materials (Medium Effect)

9.3.1 Base Material (Minor Effect)

The ring base material will affect side wear. Excessive side wear of the ring or groove can result in ring breakage which will affect friction.

9.3.2 Face Coating Material (Medium Effect)

The ring face material will affect the coefficient of friction between the ring and the cylinder bore. This will affect the friction primarily at Top Dead Center (TDC). However, as mentioned above, while the friction forces may be high at TDC, the friction power loss (friction multiplied by speed) is lower.

The face coating will also affect the wear characteristics of the ring. As the ring wears, it will change the face profile on the ring which will affect friction.

9.4 Oil Ring

The oil ring is a significant contributor to friction. Because of the low surface area and high tension on the ring, it will easily break through the oil film. This is good for oil consumption, but results in friction. Since this occurs over the entire stroke, the results on friction power loss are high.

9.4.1 General Oil Ring

9.4.1.1 Unit Pressure (Major Effect)

The unit pressure of the oil ring is critical for good oil control. The unit pressure is defined as:

$$\text{Unit Pressure} = \text{Tension}/(\text{Bore Diameter})/(\text{Oil Ring Land Width}) \quad (\text{Eq. 1})$$

This represents the pressure that the ring exerts on the cylinder wall. Sufficient unit pressure is needed to allow for good ring scraping of oil. However, a ring tension that is too high will result in high friction and wear. Therefore the oil ring unit pressure design is a trade-off of low oil consumption and low friction.

Over time the spring force acting on the oil ring will decrease because of wear on the ring body. As a result of the wear the spring is no longer confined to the same area it was before and the force decreases. Eventually this will cause an increase in oil consumption and a decrease in friction. This loss in ring tension should be considered in planning the life of the engine.

9.4.1.2 Oil Ring Tension (Major Effect)

Oil ring tension has a significant effect on the scraping ability of the oil ring. Increasing oil ring tension will force the ring to conform to the cylinder wall distortion better and as a result will reduce oil consumption. Once the ring has sufficient force to conform to the distortion of the cylinder, increasing tension will not decrease oil consumption any more. However, increasing oil ring tension will also increase friction. Therefore the tension of the oil ring should be just high enough to ensure adequate oil consumption and no higher to keep friction at acceptable levels.

9.4.1.3 Oil Land (Rail) Width (Major Effect)

The combination of the oil ring land width and oil ring tension control the unit pressure of the oil ring. This has a major effect on friction. The thinner the ring, the easier it is for the ring to break through the oil film. This is good for oil scraping but will cause friction. See section 9.4.1.1.

9.4.1.4 Body Design (Major Effect)

The shape of the oil ring body or rail will significantly affect the conformability of the ring. The material of the body will significantly affect what shapes can be made for the body. Therefore the material and shape combination can significantly affect conformability. If the ring, cannot conform to the distorted bore sufficiently, then tension on the ring will need to be increased until it can. This will result in higher friction. A more conformable body design will require less tension and as a result lower friction.

9.4.1.5 Overall Oil Ring Width (Medium Effect)

The axial width of the oil ring will affect how the lands or rails contact the cylinder wall. The smaller the axial ring width the more the lands or rails will stay in contact with the cylinder wall and thus scrape oil better. This may also affect friction.

9.4.2 Two Piece Oil Ring

A two piece oil ring is typically used by diesel engines and in some gasoline engines. The two pieces are the body of the oil ring and the spring expander.

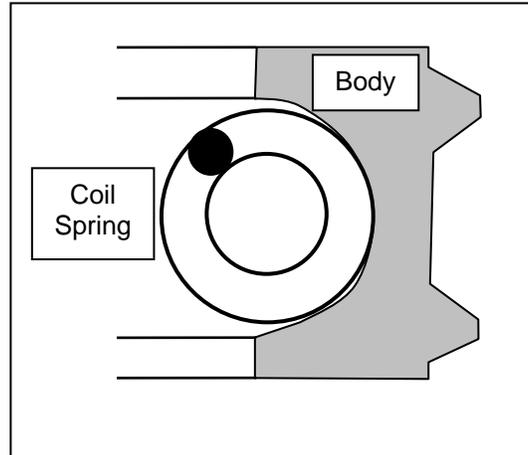


FIGURE 38 - TWO PIECE OIL RING

The oil ring body is usually composed of two narrow lands or rails. Since these are narrow, they will tend to break through the oil film and scrape the oil off the cylinder wall. In most cases the land profiles are flat. In some cases the face profiles of the rings are tapered to enhance the downward scraping of the ring. How the rings break through the oil film will affect friction. Tapers on the face of the lands may improve short term oil consumption and increase friction until the taper wears away.

The spacing between the lands will have an effect on how the ring scrapes the oil off the cylinder bore. The closer the lands, the more contact both lands will have while moving up and down in the bore. This will improve the scraping ability of the ring but at the same time affect friction.

9.4.3 Three Piece Oil Ring

The three pieces of this type of ring are two rails and an expander spring. The expander spring has the effect of not only pushing the two rails radially against the cylinder wall but may also push axially against the ring groove depending on the lug design. The lug angle determines the amount of force that the rails apply to the sides of the oil groove. The force will affect how the ring seals the flow of gases and oil around the sides of the ring and will thus affect oil consumption. The side forces acting on the groove may affect the radial force of the oil ring and thus affect friction.