



SURFACE VEHICLE RECOMMENDED PRACTICE

J2982™

OCT2022

Issued 2013-06
Revised 2022-10

Superseding J2982 JUN2013

Riding Range Test Procedure for On-Highway Electric Motorcycles

RATIONALE

The previous version of this document states that the engine must be disengaged in order to obtain the losses from the system in motion. In an electric vehicle, there is no way to disengage the motor. The range and losses that are obtained are false due to the fact that motor (magnetic losses) are inherent to the function of the motor, even with regeneration (backdriving the motor to energize the battery) disengaged there are continuous losses in the system. The proposed changes would be to use a “continuous motion” at a constant speed to determine the inherent losses of the system. This proposed method may be used in all electrically driven vehicles.

FOREWORD

This SAE Recommended Practice establishes a chassis dynamometer-based procedure for measuring the riding range of on-highway electric motorcycles under several different operating conditions. A “city” range test is specified to determine riding range during “stop-and-go” operation. Constant speed tests at 55 mph and 70 mph are specified to determine riding range during uncongested highway operation at two different cruising speeds. A “highway commuting” range calculation procedure is specified to determine riding range in urban areas when operation consists of 50% stop-and-go operation and 50% operation on urban freeways under levels of congestion that allow for quasi-steady speeds of 55 to 70 mph. This also establishes a recommended practice for deriving dynamometer coefficients for electric vehicles incapable of disengaging the motor for the “coast-down” portions of the test.

INTRODUCTION

Since model year 1972, the U.S. Environmental Protection Agency (EPA) has specified the use of the Urban Dynamometer Driving Schedule (UDDS) to determine compliance with exhaust emission standards for passenger cars and light-duty trucks. Beginning in model year 1978, the UDDS was also the driving cycle specified to determine the “city” fuel economy used to determine compliance with the corporate average fuel economy standards for passenger cars. Also beginning in model year 1978, the UDDS was the driving schedule specified for testing exhaust emissions from highway motorcycles with engines >169 cubic centimeters (cc) displacement. (A modified version of the driving cycle with reduced speeds was specified for motorcycles <170 cc.) More recently, the UDDS has been specified as the driving cycle used to determine the “urban all-electric range” of an electric car, which is used to determine the level of credit a manufacturer receives under California and federal standards requiring compliance to be based on the fleet average emissions of vehicles meeting various emissions standards. (The federal procedure for measuring the range of an electric vehicle, which is in 40 CFR 86.1770-99, is a copy of the procedure initially developed by the California Air Resources Board.)

SAE Executive Standards Committee Rules provide that: “This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user.”

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2022 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

For more information on this standard, visit
https://www.sae.org/standards/content/J2982_202210/

The primary provisions of the “urban all-electric range” test procedure are a specified “cold soak” period prior to the start of the test during which the battery is charged, followed by operation over repeated urban dynamometer driving schedules until the vehicle is no longer able to maintain its initial speed-time profile. (Testing is terminated for vehicles that cannot keep up with the required speed-time profile when fully charged or when their maximum speed falls below 95% of the maximum speed initially achieved on the UDDS.) Alternatively, the test is terminated when a warning light indicates that it is not safe to continue.

The UDDS has been shown to produce fuel economy and range values for gasoline-fueled passenger cars that are representative of consumer experience for stop-and-go driving in urban areas when a 0.9 adjustment factor is applied. No adjustment factor is required for the urban all-electric range test and, due to the absence of air conditioner use and cold weather operation, no adjustment factor is believed to be necessary for electric motorcycles. In contrast, the EPA highway fuel economy test does not produce representative range or fuel economy values. This is due to the use of a driving schedule that is specifically intended to represent non-urban driving in areas where there is vigorous enforcement of a 55 mph speed limit. As a result, the highway test has long been recognized to overstate the fuel economy and range that motorists can expect for what they consider highway driving. Beginning in 1984, federal regulations required manufacturers to discount results obtained using the highway fuel economy test by 22% before reporting results to consumers. Beginning in model year 2008, a more complex procedure was implemented that requires manufacturers to calculate highway fuel economy based on four separate driving cycles, which now includes portions of the UDDS. The new procedure accounts for some operation at 20 °F and speeds of up to 80 mph on a driving cycle intended to represent aggressive driving. These and other provisions of the new procedure are not considered appropriate for electric motorcycles.

On limited-access highways and freeways with speed limits of 55 mph or higher, the range of electric motorcycles is generally lower than during stop-and-go operation and highly dependent on cruising speed. The top speed of some models is also lower than the cruising speeds typical with low levels of traffic congestion on limited access roadways. For these reasons, the recommended practice specifies two different cruising speeds: 55 mph and 70 mph. The 55 mph speed is representative of the top speed necessary to maintain the minimum legal speeds on freeways on commonly occurring grades. The 70 mph speed is representative of the cruising speed of passenger cars and light-duty trucks on urban freeways under low levels of congestion.

Because no trips in urban areas consist of 100% freeway operation, a “highway commuting” range procedure is specified which represents a 50:50 mixture of stop-and-go riding and steady speed cruising. Analysis of data collected in several California urban areas indicates that this mix of operation is representative of trips by light-duty vehicles that include some operation on freeways.

In addition to the aforementioned drive cycles, the world motorcycle test cycle (WMTC) provides another drive cycle that may be used to calculate range for a vehicle. WMTC has been adopted for motorcycle range testing in the EU and Global Technical Regulation (GTR) No. 2. This provides another value to determine potential range, particularly for users to base decisions from promotional materials.

1. SCOPE

This SAE Recommended Practice incorporates dynamometer test procedures that produce riding range estimates for electric motorcycles during stop-and-go urban riding on surface streets and commuting trips in urban areas that include operation on freeways. This is typically done using a “coastdown” approach by disengaging the engine and assuming all losses are aerodynamic. However, with inherent losses in an electric motor, and no way to fully disengage the motor, another approach is to use a “on-road, constant speed” (Appendix B) method for fully electric vehicles to develop dynamometer coefficients.

1.1 Purpose

This document provides testing procedures for measuring the range of on-highway electric motorcycles during urban operation and constant speed cruising.

2. REFERENCES

2.1 Related Publications

The following publications are provided for information purposes only and are not a required part of this SAE Technical Report.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA), www.sae.org.

SAE J213 Motorcycle Classifications

SAE J1263 Road Load Measurement and Dynamometer Simulation Using Coastdown Techniques

SAE J2263 Road Load Measurement Using Onboard Anemometry and Coastdown Techniques

2.1.2 Code of Federal Regulations (CFR) Publications

Available from the United States Government Printing Office, 732 North Capitol Street, NW, Washington, DC 20401, Tel: 202-512-1800, www.gpo.gov.

40 CFR, Part 86, Subparts E and F

40 CFR, Part 86, Appendix I [July 13, 2005]

2.1.3 California Code of Regulations

"California Exhaust Emission Standards and Test Procedures for 2009 and Subsequent Model Zero-Emission Vehicles and Hybrid Electric Vehicles, in the Passenger Car, Light-Duty Truck and Medium-Duty Vehicle Classes," California Air Resources Board, December 2, 2009.

"California Exhaust Emission Standards and Test Procedures for 2009 Through 2017 Model Zero-Emission Vehicles and Hybrid Electric Vehicles, in the Passenger Car, Light-Duty Truck and Medium-Duty Vehicle Classes," California Air Resources Board, December 6, 2012, available from:

http://www.arb.ca.gov/msprog/levprog/cleandoc/2009-2017%20my%20hevtps_clean%20complete_12-12.pdf.

3. DEFINITIONS

3.1 ON-HIGHWAY ELECTRIC MOTORCYCLE

An on-highway electric motorcycle is a motorcycle as defined by SAE J213 that is legal for street use and propelled exclusively by electric motors energized by storage batteries or fuel cells.

3.2 RANGE

Starting with a fully charged battery, the range in kilometers (km) or miles is the total distance that can be travelled using a specified speed-time profile before the vehicle experiences a significant degradation in performance (as specified in Section 7) or the operator is warned that it is no longer safe to continue.

3.3 CHARGE-DISCHARGE CYCLE

As used in Section 6, "charge-discharge cycle" shall mean the process involving the vehicle battery being fully recharged following discharge to the point that the "end of test criteria" in Section 7 are met and then subsequently discharged to the point that the end of test criteria are met again.

3.4 BATTERY CAPACITY

The kilowatt-hours (kWh) of energy provided by the vehicle battery between the time it is fully charged and the time the vehicle completes a range test conducted in accordance with Section 7.

4. TEST EQUIPMENT AND INSTRUMENTATION

4.1 Dynamometer

The default dynamometer to be used for motorcycle testing is specified in 40 CFR 86.508-78. It requires a single roll with a minimum 0.40 m (16 inch) diameter. The dynamometer shall be calibrated in accordance with the requirements of 40 CFR 86.518-78. The provisions of 40 CFR 86.529 shall be used for inertia and road load simulation settings, including coastdown calibration times. These settings may also be used on a single-roll 1.2 m (48 inch) dynamometer. In addition to the method described for a single-roll dynamometer calibration, an iterative data based approach may be used.

40 CFR 86.529 gives default coefficients for a single roller dynamometer in motorcycle testing based on weight. With other factors involved in system losses, the dynamometer coefficients may be calculated via data analysis and an iterative approach. This approach will provide more accurate range information as the loads applied will be representative of real-world application.

The equipment associated with the dynamometer in 40 CFR 86.508-78 includes a cooling fan operated at speeds proportional to the dynamometer roll speed, with associated specifications. Compliance with the cooling fan specifications is not required for the range test if a lower flow rate of air is sufficient to prevent overheating.

A twin-roll dynamometer may be used for this procedure, but the road load power settings must be determined using the road coastdown and dynamometer load setting determination methods specified in Appendix A, or equivalent. The driver must assume a normal upright riding posture with arms extended, not a tucked position, during the road coastdown procedure. A wheel-down dynamometer "quick check" coastdown time from 55 to 45 mph performed with the derived load settings must not exceed the road coastdown time by more than 7%.

4.2 Vehicle Speed

Vehicle speed during dynamometer testing shall be determined by the rotational speed of the dynamometer roller(s) and the measured circumference of the roller(s). The accuracy of the rotational speed measurement and dynamometer roller diameter shall be sufficient to allow speed to be accurate within 0.4 km/h (0.25 mph).

Vehicle speed measured during coastdown testing shall be accurate within 0.4 km/h (0.25 mph).

Vehicle speed measured during on-road constant speed testing shall be accurate to ± 0.4 km/h (0.25 mph).

4.3 Distance

Distance traveled during a dynamometer test shall be computed from measured roll diameter and a count of roll revolutions (or fractions of revolutions). The accuracy of the roll diameter and rotational speed shall be sufficient for the computed distance traveled to be accurate within 0.5% of the actual distance.

4.4 Temperature

Temperature during coastdown testing, cold soak, and chassis dynamometer testing shall be determined using a temperature-indicating device capable of measuring to the nearest 1 °C or 2 °F.

4.5 Barometric Pressure

During coastdown testing performed pursuant to Appendix A, the barometric pressure measurement device must have an accuracy of ± 0.3 kPa or ± 0.1 in Hg.

4.6 Relative Humidity

During coastdown testing performed pursuant to Appendix A, the relative humidity must be measured with an accuracy of $\pm 5\%$.

4.7 Wind Speed

During coastdown testing performed pursuant to Appendix A, the wind speed measuring device must have an accuracy of ± 1.6 km/h (± 1 mph).

4.8 Time

All measurements of time must be accurate to ± 0.1 second over a 60-second interval, with a resolution of 0.1 second.

4.9 Tire Pressure

The tire pressure gage should have an accuracy of ± 7 kPa (± 1 psi) and resolution of 7 kPa (1 psi).

All tire pressure measurements shall be taken after a minimum 4-hour soak. For single-roll dynamometers, the cold tire pressure must be set to the manufacturer's minimum recommended tire pressure. For twin-roll dynamometer testing, tire pressure shall not exceed levels normally used in dynamometer testing (SAE J1263) and necessary for safe operation. The tire pressure used for dynamometer testing shall be the same pressure as used on the test track to establish the dynamometer road load power setting.

4.10 Vehicle Weight

The vehicle weight must be measured with a device that is accurate within $\pm 0.5\%$ with a minimum resolution of 5 kg (10 pounds). The equivalent inertial mass used to set the dynamometer includes the curb weight of the bike plus 80 kg representing a typical driver.

5. TEST VEHICLE

5.1 Minimum Performance

This test procedure is limited to use on electric motorcycles legal for street use with a top speed of at least 26 mph.

5.2 Representativeness

The test vehicle shall be representative of a standard production-built vehicle equipped with any accessories or optional equipment that are installed on at least 50% of the vehicles produced. However, in the case of vehicles with removable luggage (e.g., panniers), the vehicle may be tested using dynamometer settings representing the absence of the removable luggage as long as the fact that the luggage has been removed is reported (e.g., "range was measured with saddlebags and top case removed") along with any publication of the range values. Tires used shall be the same size and specification as those installed on the vehicle at the time of sale. Tires shall be inflated to the manufacturer's recommended inflation pressure and shall not be worn to less than 50% of the original tread depth. Prior to coastdown testing, the exterior surface of the vehicle shall be clean and free of any modifications that would affect aerodynamic drag (e.g., removal of mirrors or addition of tape over seams in bodywork).

6. TEST VEHICLE PREPARATION

6.1 Battery Preconditioning

Prior to the conduct of a range test, batteries shall be conditioned according to the recommendations of the vehicle manufacturer if such conditioning is required to achieve maximum energy storage capacity. If the capacity of the vehicle's battery changes by more than 10% following a series of 40 charge-discharge cycles, then the battery shall be subjected to at least 40 charge-discharge cycles prior to dynamometer testing.

6.2 Cold Soak

Before each range test, the vehicle shall be stored at an ambient temperature not less than 68 °F (20 °C) and not more than 86 °F (30 °C) for 6 to 36 hours. During this time, the vehicle's battery shall be charged to a full state-of-charge.

7. TEST PROCEDURE

7.1 Dynamometer Setting

Road load force and inertia weight determination shall be performed in accordance with 40 CFR 86.529-98, except that, if the dynamometer setting is determined based on coastdown testing, the more detailed procedure specified in Appendix A shall be used. For vehicles incapable of complete motor disengagement, an alternative method of dynamometer setting based on "coastdown" or constant speed test data may be used.

7.2 Basic Dynamometer Procedure

The dynamometer procedure shall be as specified in 40 CFR 86.535-90(c)-(h), except those references to "transient cold start, stabilized cold start, and transient hot start phases of the test" shall be interpreted to mean "the dynamometer driving schedule."

7.3 Cooling Air

The temperature of the air blowing over the motorcycle shall be not less than 68 °F (20 °C) and not more than 86 °F (30 °C) during dynamometer testing and the velocity of the air flowing over the motorcycle shall meet the requirements of 40 CFR 86.508-78(d) if required to prevent overheating.

7.4 Vehicle Operation

To the extent feasible, vehicles shall be tested in accordance with the procedures specified in 40 CFR 86.528-78. References to "throttle" shall be interpreted as referring to the twist grip, pedal, or other device that regulates motor output. The manufacturer's recommended procedures shall be used for the operation of any transmission or clutch in lieu of the procedures specified for motorcycles with internal combustion engines in 40 CFR 86.528-78. In instances where motor disengagement is not possible, constant speed testing is recommended.

7.5 Dynamometer Driving

7.5.1 City Test

At the end of the cold soak period, the vehicle shall be disconnected from the battery charging system and placed or pushed onto the chassis dynamometer and operated through successive urban dynamometer driving schedules as defined in 40 CFR 86, Appendix I. The driving schedule contained in Appendix I(b) ("EPA Urban Dynamometer Driving Schedule for Light-Duty Vehicles, Light-Duty Trucks, and Motorcycles with Engine Displacements Equal to or Greater than 170 cc") shall be used for vehicles capable of maintaining a constant speed of 56.7 mph for at least 10 minutes. The driving schedule contained in Appendix I(c) ("EPA Urban Dynamometer Driving Schedule for Motorcycles with Engine Displacements Less than 170 cc") shall be used for vehicles not capable of maintaining a speed of 56.7 mph for at least 10 minutes. A 10-minute soak (period of non-operation with the vehicle switched off) may follow each UDDS, during which there shall be no recharging. (Manufacturers have the option of skipping the 10-minute soak period.)

7.5.2 Constant Speed Tests

Vehicles capable of maintaining a speed of 70 mph for at least 10 minutes shall be tested at both 55 mph and 70 mph. Vehicles that are capable of maintaining a speed of 55 mph for at least 10 minutes shall be tested at 55 mph. Vehicles that are not capable of maintaining a speed of 55 mph for at least 10 minutes shall not be subject to testing at constant speed.

7.5.2.1 55 mph Test

At the end of the cold soak period, the vehicle shall be disconnected from the battery charging system and placed or pushed onto the chassis dynamometer and accelerated to 55 mph at a rate of 3.3 mph/s or under maximum power if the vehicle will not achieve and maintain an acceleration rate of 3.3 mph/s. The rider shall attempt to maintain 55 mph as closely as possible and shall not permit the speed to vary from the target by more than 1 mph for more than 2 seconds.

7.5.2.2 70 mph Test

At the end of the cold soak period, the vehicle shall be disconnected from the battery charging system and placed or pushed onto the chassis dynamometer and accelerated to 70 mph at a rate of 3.3 mph/s or under maximum power if the vehicle will not achieve and maintain an acceleration rate of 3.3 mph/s. The rider shall attempt to maintain 70 mph as closely as possible and shall not permit the speed to vary from the target by more than 1 mph for more than 2 seconds.

7.6 End of Test Criteria

7.6.1 End of City Cycle Test

7.6.1.1 Vehicles Capable of Maintaining a Constant Speed of 56.7 mph for 10 Minutes

For vehicles subject to the driving schedule in 40 CFR 86 Appendix I(b), the driving schedule shall be repeated until the vehicle is no longer able to reach a speed of at least 53.9 mph (86.7 km/h) between second number 226 and second number 254 of the driving schedule or the illumination of a warning light informing the operator that operation should be terminated for safety reasons or to avoid permanent battery damage. At that point, the vehicle shall be decelerated to a stop at a rate of 3.3 mph/s and the test shall be terminated.

7.6.1.2 Vehicles Not Capable of Maintaining 56.7 mph for 10 minutes but Capable of Maintaining 36.5 mph for 10 Minutes

For vehicles subject to the driving schedule in 40 CFR 86 Appendix I(c) that are capable of maintaining a constant speed of 36.5 mph for at least 10 minutes, the vehicle shall be operated at maximum available power when the vehicle cannot achieve the speed trace within the speed and time tolerances specified in Appendix I. The test shall be terminated when the vehicle speed when operated at maximum available power falls below 34.5 mph (55.5 km/h) between second number 226 and second number 256 of the driving schedule¹ or the illumination of a warning light informing the operator that operation should be terminated for safety reasons or to avoid permanent battery damage. At that point, the vehicle shall be decelerated to a stop at a rate of 3.3 mph/s and the test shall be terminated.

7.6.1.3 Vehicles Not Capable of Maintaining 36.5 mph for 10 Minutes

For vehicles subject to the driving schedule in 40 CFR 86 Appendix I(c) that are not capable of maintaining 36.5 mph for 10 minutes, the vehicle shall be operated at maximum available power when the vehicle cannot achieve the speed trace within the speed and time tolerances specified in Appendix I. The test shall be repeated until illumination of a warning light informing the operator that operation should be terminated for safety reasons or to avoid permanent battery damage, or the vehicle speed when operated at maximum available power falls to 2 mph (3.2 km/h) below the maximum speed initially achieved between second number 226 and second number 256 of the driving schedule or 25 mph (40.2 km/h), whichever is higher. At that point, the vehicle shall be decelerated to a stop at a rate of 3.3 mph/s and the test shall be terminated.

7.6.2 End of Constant Speed Tests

The target speed shall be maintained until the vehicle is no longer able to stay within 2.0 mph of the target speed or until the illumination of a warning light informing the operator that operation should be terminated for safety reasons or to avoid permanent battery damage. At that point, the vehicle shall be decelerated to a stop at a rate of 3.3 mph/s and the test shall be terminated.

¹ Speed variations greater than the tolerances specified in Appendix I that occur during gear changes or braking spikes are acceptable, provided they occur for less than 2 seconds on any occasion and are clearly documented as to the time and speed at that point of the driving schedule.

7.7 Vehicles Not Capable of Motor Disengagement

Test procedures outlined above may be followed with deviation at deceleration and “coastdown.” Vehicles that are fully electric are subject to losses inherent to the motor, not only aerodynamic losses. For these vehicles, weather and road conditions prescribed above shall be required for testing.

The vehicle must then meet prescribed conditions and a constant speed maintained (software or hardware may be used as a cruise control at a set speed) for more than 20 seconds at various speeds. Speeds recommended for data collection range from 20 to 70 mph increasing in increments of 10 mph. The test must be run in each road direction for most accurate record of losses. Measurement accuracy shall meet that of the dynamometer (40 CFR 86.508-78).

8. DATA RECORDING

The following information shall be recorded for each test.

- 8.1 Date and time of day.
- 8.2 Dynamometer operator.
- 8.3 Rider/vehicle operator.
- 8.4 Vehicle make, model, model year, vehicle identification number, transmission type, odometer reading at beginning of test, nominal battery capacity, maximum motor output, actual curb mass, and drive wheel tire pressure.
- 8.5 Dynamometer make, model, and serial number.
- 8.6 Dynamometer settings (inertia and load).
- 8.7 Test cell temperature.
- 8.8 The driving distance for each test as calculated from roll counts.
- 8.9 A digital record of the vehicle speed for each second of the test.
- 8.10 Shift speeds used for vehicles equipped with manual transmissions.
- 8.11 Motor speed and power

9. RANGE CALCULATION AND REPORTING

The range values for each driving schedule shall be determined by measuring the total number of revolutions of the dynamometer roller from the start of the test until the point at which the end of test criteria described in Section 7 are achieved. Based on the distance travelled per revolution of the dynamometer roller and the total number of revolutions, the distance travelled shall be calculated in units of miles or kilometers, rounded to the nearest whole number.

For vehicles capable of maintaining a constant speed of 55 mph for 10 minutes, both a city range value and highway commuting range value shall be reported. Additionally, a cycle that combines both urban and highway driving, WMTC may be used and values reported. Reporting of range values for the constant speed tests is recommended for fully electric vehicles.

9.1 City Range

The calculated value for the urban dynamometer driving schedule shall be reported as the range for “city” or “stop-and-go” riding.

9.2 Constant Speed Range

The calculated value for the constant speed tests shall be presented as the range for “XX mph constant speed” or “XX mph steady speed,” where “XX” is the speed of the test. The speeds of the test may be reported as 89 km/h for the 55 mph test and 113 km/h for the 70 mph test.

9.3 Highway Commuting Range

For vehicles with a top speed of at least 55 mph, a “highway commuting range” value may be reported with a footnote indicating that the calculation is based on “50% stop-and-go” or “50% city” riding and “50% constant speed operation at XX mph” (where “XX” is the speed used for the constant speed test). The constant speed used in the calculation shall be based on the top speed of the vehicle. For vehicles with a top speed of at least 70 mph, the calculation must be based on the 70 mph constant speed test. For vehicles with a top speed of less than 70 mph, the calculation must be based on the 55 mph constant speed test. Highway commuting range shall be calculated based on the VMT-weighted harmonic average of the range values for the city and highway test using the following formula:

$$\text{Highway Commuting Range} = \frac{1}{\frac{0.5}{\text{Range}_{\text{city}}} + \frac{0.5}{\text{Range}_{\text{constant speed}}}} \quad (\text{Eq. 1})$$

10. EFFICIENCY CALCULATION AND REPORTING

The efficiency values for each driving schedule, if reported, shall be determined by using the range values calculated in accordance with Section 9 and the measured kWh of electricity required to fully recharge the battery from the point at which the end of test criteria described in Section 7 are achieved. The efficiency for city, constant speed, and/or highway commuting shall be reported in units of miles per kWh, kilometers per kWh, Wh per mile, or Wh per kilometer. Based on these calculated values, the cost of electricity per mile or kilometer of city, constant speed, and/or highway commuting travel may be determined for a specified cost of electricity per kWh. When on-board chargers are used, the electricity used shall be measured at the input to the charger. When off-board chargers are used, the electricity used may be measured at either the input or output of the charger, depending on the basis for electricity consumption charged to the vehicle operator. Depending on whether electricity use is measured at the input or output of the charger, the efficiency shall be reported as “including charger energy use” or “excluding charger energy use.”

11. NOTES

11.1 Revision Indicator

A change bar (|) located in the left margin is for the convenience of the user in locating areas where technical revisions, not editorial changes, have been made to the previous issue of this document. An (R) symbol to the left of the document title indicates a complete revision of the document, including technical revisions. Change bars and (R) are not used in original publications, nor in documents that contain editorial changes only.

APPENDIX A - ROAD LOAD COASTDOWN PROCEDURE FOR TWIN-ROLL DYNAMOMETERS

A.1 APPLICABILITY

40 CFR 86.529 provides default dynamometer force settings for motorcycles tested on a single-roll dynamometer. The default settings include an assumed tire rolling resistance for the single roll interface. If a manufacturer wishes to use a twin-roll dynamometer for the range test, a track road load coastdown test must be performed to determine appropriate settings for the specific dynamometer used.

40 CFR 86.529(c) briefly describes a procedure to perform road coastdowns to determine dynamometer settings. A very detailed coastdown procedure for automobiles and light trucks tested on a hydrokinetic dynamometer is specified in SAE J1263. SAE J2263 provides details for electric dynamometers. Both SAE procedures are very detailed but relatively expensive procedures to perform. The procedure described herein expands on the procedure contained in the Code of Federal Regulations and provides sufficient accuracy for range testing while avoiding much of the expense associated with the detailed procedures found in SAE J1263 or SAE J2263.

A.2 GENERAL

The road coastdown consists of driving on a smooth level track under low wind conditions and allowing the vehicle to freely decelerate while recording speed each second. As described in SAE J1263, the observed deceleration reflects the road load forces encountered by the vehicle during the deceleration. As the range test includes either a 50 mph or 70 mph steady-state test, the coastdown time interval to be used for the dynamometer in this procedure will be from 55 to 45 mph.

A.3 TEST CONDITIONS

Because no corrections for wind, roadway grade or air density are performed in this simplified procedure, average wind speed must be less than 8 km/h (5 mph) with gusts less than 16 km/h (10 mph), the roadway grade must be not greater than 1%, and the air density at the time of the coastdown run must be in the range of 1.14 to 1.20 kg/m³. The air density (ρ) shall be calculated using the following equation:

$$\rho = \left[\frac{P}{R_d \times T} \right] \times \left[1 - \frac{0.378 \times P_v}{P} \right] \quad (\text{Eq. A1})$$

where:

ρ = the air density, in kg/m³

P = total air pressure, in Pascals

R_d = gas constant for dry air, 287.05 J/(kg*K)

T = temperature, in K

P_v = pressure of water vapor (partial pressure), in Pascals, calculated using the following equation:

$$P_v = RH \times E_s \quad (\text{Eq. A2})$$

where:

RH = the relative humidity

E_s = the saturation pressure of water vapor, in Pascals, calculated using the following equation:

$$E_s = c_0 \times 10^{\frac{c_1 \times T_c}{c_2 + T_c}} \quad (\text{Eq. A3})$$

where:

$$c_0 = 610.78$$

$$c_1 = 7.5$$

$$c_2 = 237.3$$

$$T_c = \text{temperature, in } ^\circ\text{C}$$

The combined weight of the vehicle, driver, and test instrumentation used during the road coastdown must match the equivalent inertial mass setting of the dynamometer within ± 10 kg.

Cold tire pressures higher than those recommended during normal use may be used to prevent tire damage on the twin-roll dynamometer. The maximum tire pressure allowed is 340 kPa (45 psi). The tire pressure used during the dynamometer coastdown and range test must match the pressure used during the road coastdown procedure.

A.4 TEST PROCEDURE

Cold tire pressure must be checked, following a minimum of 4 hours of non-operation. Immediately before the coastdown runs the vehicle must be warmed up with a minimum of 30 minutes of operation at approximately 80 km/h.

Coastdown runs must include pairs of runs performed in opposite directions on the same road. The final data set must include at least five pairs of valid runs. The recorded deceleration speed interval for each run must include speeds from 100 to 50 km/h (62 to 30 mph).

A.5 DATA REDUCTION

The speed versus time results should be plotted in a program such as Microsoft Excel for inspection. Coastdowns with comparatively large perturbations (>2 mph from the trend) should be discarded, being careful to retain the same number of runs in each direction in the final data set.

It is convenient to assign a time of 0.0 to the final value above 100 km/h for each coastdown run. To calculate coastdown times, fit the time versus speed results to second-order polynomial equations in the form $\text{time} = a + b \cdot \text{speed} + c \cdot \text{speed}^2$. Use these equations to calculate the time for 55 mph and for 45 mph, and subtract the two values to obtain the coastdown time for each run. Compute the arithmetic average coastdown time to arrive at the dynamometer target coastdown time.

Table A1 - Example using 5 Hz speed data in mph

Time:	0.0	0.2	0.4	0.6	0.8	...	23.6	23.8	24.0	24.2
Speed:	62.03	61.53	60.91	60.25	59.74	...	30.75	30.52	30.19	29.78

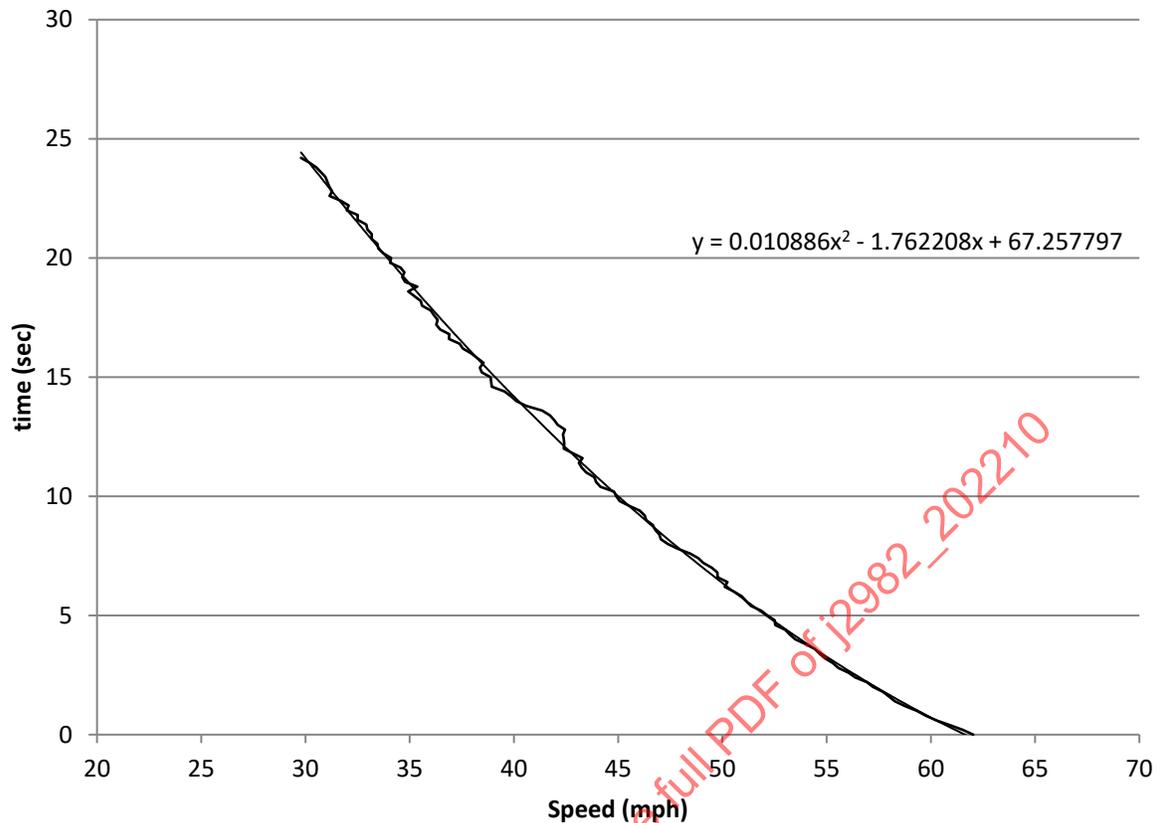


Figure A1 - Plot of speed versus time from coastdown

Calculating times for 55 mph and 45 mph:

$$t_{55} = 0.010886 * 55 * 55 - 1.762208 * 55 + 67.257797 = 3.267 \text{ seconds}$$

$$t_{45} = 0.010886 * 45 * 45 - 1.762208 * 45 + 67.257797 = 10.003 \text{ seconds}$$

$$\text{Coastdown time for 55 to 45 mph: } 10.003 - 3.267 = 6.736 \text{ seconds}$$

A.6 DYNAMOMETER COASTDOWNS

Dynamometer power settings which duplicate the average road coastdown time are found by varying the power setting while performing repeated wheel-down coastdowns on the dynamometer. The cold tire pressure must be set to the same value as used on the road. The vehicle must be warmed up on the dynamometer for 30 minutes at 80 km/h.

The recommended approach is to perform at least three dynamometer coastdowns at five different power settings. The road coastdown time must be bracketed by the dynamometer coastdown times resulting from the power settings used. Calculate inverse time (1/coastdown time), then average the times at each power setting. Plot the power settings versus average inverse time and determine the power setting that matches the road coastdown time.

APPENDIX B - ON-ROAD, CONSTANT SPEED PROCEDURE FOR DYNAMOMETER COEFFICIENTS

B.1 APPLICABILITY

SAE J2982 provides methods for determining range for vehicles with engine disengagement via clutch. For fully electric vehicles, motor disengagement is not possible. For this reason, a constant speed method is required to gather vehicle losses instead of coast down where the data is gathered at motor disengagement.

B.2 GENERAL

The on-road constant speed procedure consists of riding on a smooth level track under low wind conditions, while maintaining a constant speed.

B.3 TEST CONDITIONS

Ambient conditions must be in accordance to EU134/2014 APPX VII 2.3-2.6:

- Wind speed <3 m/s
- Wind gusts <5 m/s
- Relative humidity <95%
- Temperature 20 °C ± 3 °C
- Pressure 100 kPa
- Air density 0.9197
- Air volumetric mass 1.189 kg/m³

Relative air density (d_r) may be calculated by the following formula:

$$d_r = d_0 \times \frac{P_T}{P_0} \times \frac{T_0}{T_T} \quad (\text{Eq. B1})$$

where:

d_0 = the reference relative air density at reference conditions

P_0 = the reference ambient pressure, in kPa

P_T = the mean ambient pressure during the test, in kPa

T_T = the mean ambient temperature during test, in K

T_0 = the reference ambient temperature, in K

Road conditions shall meet specifications in EU134/2014 Appendix 7 2-2.2:

The test road shall be flat, level, straight, and smoothly paved. The road surface shall be dry and free of obstacles or wind barriers that might impede the measurement of the running resistance. The slope of the surface shall not exceed 0.5% between any two points at least 2 m apart

The vehicle condition shall be as manufacturer defines as post “run-in” period; tires and other consumables shall be run in at the same rate as the vehicle. Instrumentation must be installed to have negligible impact to the vehicle, including ensuring weight distribution between axles.

If vehicle allows for a “ride mode” to be chosen, a “nominal/normal/street” mode shall be used.

The rider shall meet requirements in EU134/2014 Appendix 7 1-1.3. The rider shall be properly outfitted in well-fitting protective gear. The rider, fully outfitted, shall have a mass of 75 kg ± 5 kg and be 1.75 m ± 0.05 m.

The rider must be seated in riding position as designed by the manufacturer, with the rider in proper control of the vehicle at all times.

B.4 TEST PROCEDURE

Cold tire pressure must be checked, following a minimum of 4 hours of nonoperation.

Constant speed runs must include pairs of runs performed in opposite directions on the same road. The final data set must include at least five pairs of valid runs. The recorded constant speed interval for each run must include speeds from 100 to 50 km/h (62 to 30 mph) and must be a minimum of 1 km in length.

Cruise control may be used to maintain a constant speed for each leg.

Vehicle steering and brakes shall be applied as little as possible during measurement period.

Data for true vehicle speed, current, voltage, and motor rpm must be recorded.

B.5 DATA REDUCTION

From each test run, extract constant speed segment of the data. Output the speed results:

- Mean maximum
- Minimum
- Standard deviation

Vehicle power may be calculated via formula below:

$$P_s = I_s \times V_s \quad (\text{Eq. B2})$$

where:

P_s = the average power during the speed interval

I_s = the average current during the speed interval

V_s = the average voltage during the speed interval

The data from a valid constant speed segment of the run shall be averaged to provide the data point.