



SURFACE VEHICLE STANDARD	J348™	OCT2020
	Issued 1968-07 Revised 1990-06 Stabilized 2020-10	
Superseding J348 JUN1990		
Wheel Chocks		

RATIONALE

The technical report covers technology, products, or processes for which technical expertise no longer resides in the owning committee.

STABILIZED NOTICE

This document has been declared "Stabilized" by the SAE Truck and Bus Tire Committee and will no longer be subjected to periodic reviews for currency. Users are responsible for verifying references and continued suitability of technical requirements. Newer technology may exist.

SAENORM.COM : Click to view the full PDF of J348_202010

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2020 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

For more information on this standard, visit
https://www.sae.org/standards/content/J348_202010

Foreword—This Document has not changed other than to put it into the new SAE Technical Standards Board Format.

1. **Scope**—This SAE standard presents the basic information required for the design and manufacture of a wheel chock.

2. **References**—There are no referenced publications specified herein.

3. **Definitions**

3.1 **Wheel Chock**—An external device, of, but not necessarily limited to, generally triangular configuration, which, when positioned in contact with a rubber-tired wheel at rest, will maintain the wheel at rest within the limits of the design calculations.

4. **Design Calculations**

4.1 **Equilibrium Method**—Assumptions

- a. 30% grade condition (based on Federal Vehicle Standard for passenger car parking brake)
- b. One wheel chocked
- c. Concave surface (maximum contact area) for wheel chock
- d. Static load -- evenly distributed
- e. Maximum vertical weight acting on one wheel of 11 500 lb (5216 kg) (based on Federal Regulation of 23 000 lb (10 433 kg))
- f. Maximum horizontal force parallel to incline of 23 000 lb (10 433 kg) (based on 80 000 lb (36 287 kg) maximum gvwt at 30% grade)

4.2 **Energy Consideration Method**—Assumptions

- a. 30% grade condition (based on Federal Vehicle Standard for passenger car parking brake)
- b. One wheel chocked
- c. Plane surface for wheel chock
- d. Maximum forces vary with tire size
- e. Dynamic forces are considered (tire roll-back)

SAENORM.COM Click to view the full PDF of J348_202010

5. **Test Conditions**—A wheel chock must be so constructed as to withstand a uniformly distributed test load that varies with tire size as indicated in Figure 1. The angle of load application (41.7 degrees) is also shown in Figure 1.

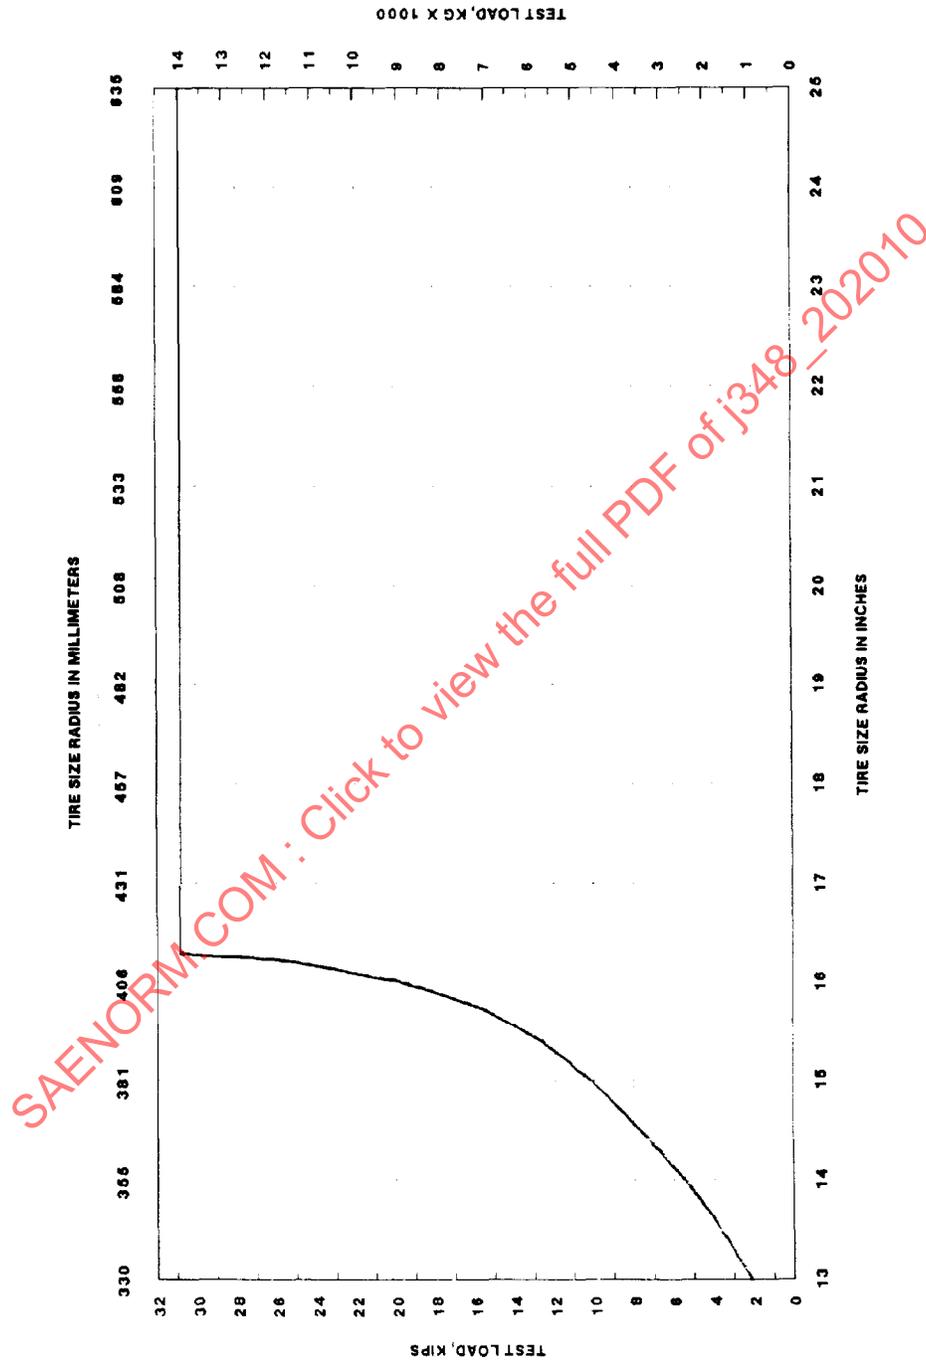


FIGURE 1—

6. Wheel Chock Design Criteria—Dimensions

- Height varies with tire size as shown in Figure 2.
- Length is 1.73 times height.
- Width is at least 3/4 of tire tread width.
- Chock angle, θ , (overall angle between the chock base and the tire engaging face) shall be between 35 and 45 degrees.

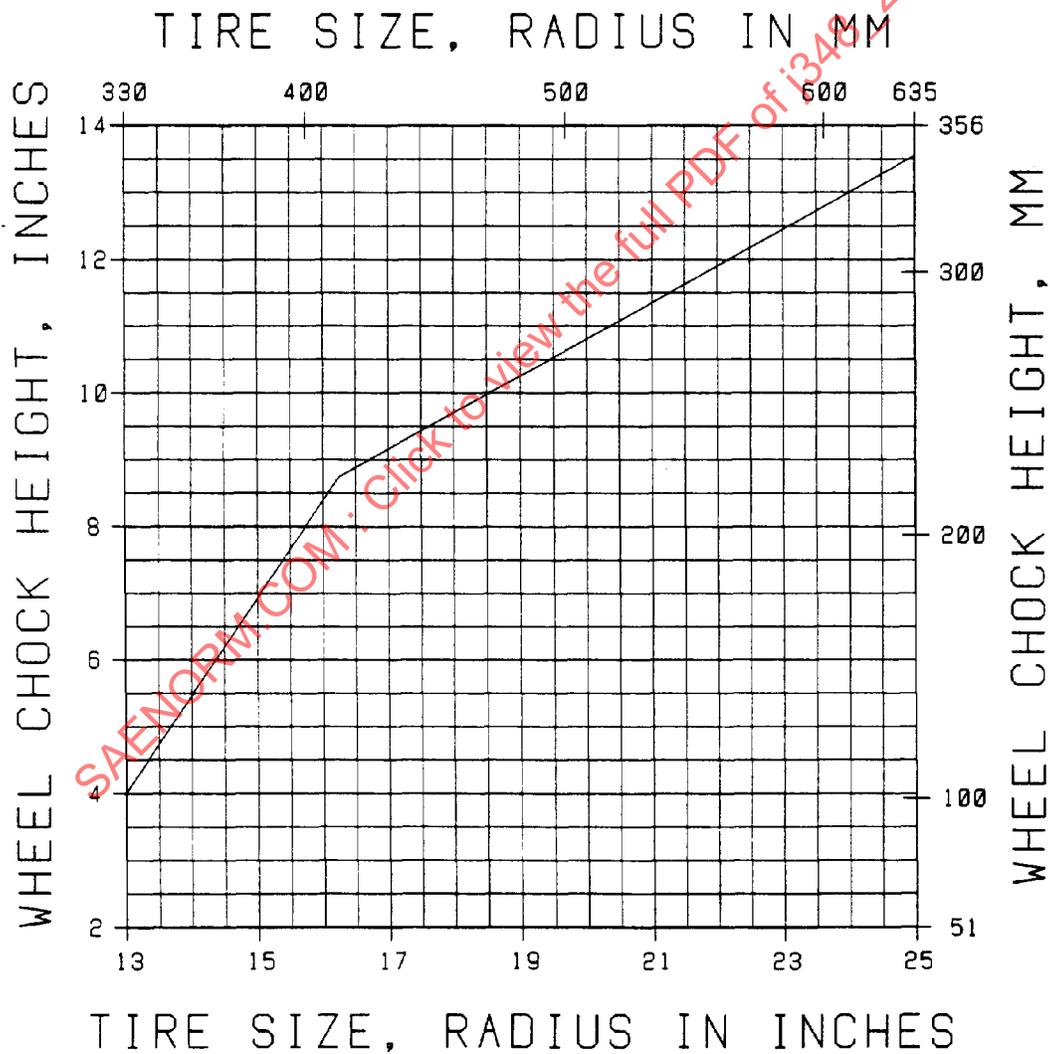
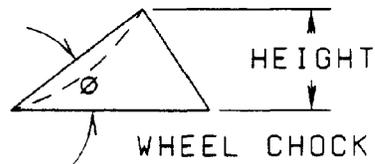


FIGURE 2—