

SAE International®

**SURFACE
VEHICLE
STANDARD**

SAE J366 SEP2011

Issued 1969-07

Stabilized 2011-09

Superseding J366 APR2001

Exterior Sound Level for Heavy Trucks and Buses

RATIONALE

The Noise, Vibration, and Harshness Committee which owned this report has become inactivated and the technical expertise for the subject report within the Truck-Bus Council is not available at this time. This standard has been transferred to the Total Vehicle Steering Committee to stabilize the standard.

STABILIZED NOTICE

This document has been declared "Stabilized" by the SAE Truck and Bus Total Vehicle Steering Committee and will no longer be subjected to periodic reviews for currency. Users are responsible for verifying references and continued suitability of technical requirements. Newer technology may exist.

SAENORM.COM : Click to view the full PDF of J366-201109

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2011 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J366_201109**

Foreword—This Document has not changed other than to put it into the new SAE Technical Standards Board Format. Scope is Section 1, References are Section 2. All other section numbers have changed accordingly.

1. Scope—This SAE Standard establishes the test procedure, environment, and instrumentation for determining the maximum exterior sound level for highway motor trucks, truck tractors, and buses. The test results obtained by this test procedure give an objective measure of the maximum noise level emitted by vehicles under a prescribed condition. A subjective rating of the annoyance caused by vehicles in use may not be directly related to this type of noise level measurement.

2. References

2.1 Applicable Publications—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply.

2.1.1 SAE PUBLICATION—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J184 MAR85—Qualifying a Sound Data Acquisition System

2.1.2 ANSI PUBLICATION—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI S1.4-1983—Specification for Sound Level Meters

3. Instrumentation—The following instrumentation shall be used, where applicable, for the measurement required:

3.1 A sound level meter which meets the Type 1 or S1A requirements of American National Standard, Specification for Sound Level Meters, S1.4-1983.

3.1.1 As an alternative to making direct measurements using a sound level meter, a microphone or sound level meter may be used with a magnetic tape recorder and/or a graphic level recorder or indicating instrument, providing the system meets the requirements of SAE J184 MAR85, Qualifying a Sound Data Acquisition System.

3.2 A sound level calibrator accurate within ± 0.5 dB. (See 6.2.3.)

3.3 An engine-speed tachometer accurate within $\pm 2\%$ of full scale.

- 3.4 An anemometer having an accuracy of $\pm 10\%$ at 19 km/h (12 mile/h) wind speed.
- 3.5 A windscreen, which if used does not affect the microphone response more than ± 1 dB for frequencies from 20–4000 Hz, and ± 1.5 dB for frequencies from 4000–10 000 Hz.

4. Test Site

- 4.1 A suitable test site shall consist of a level open space free of large reflecting surfaces such as parked vehicles, signboards, buildings, or hillsides, located within 30 m (100 ft) of either the vehicle path or the microphone. See Figure 1.

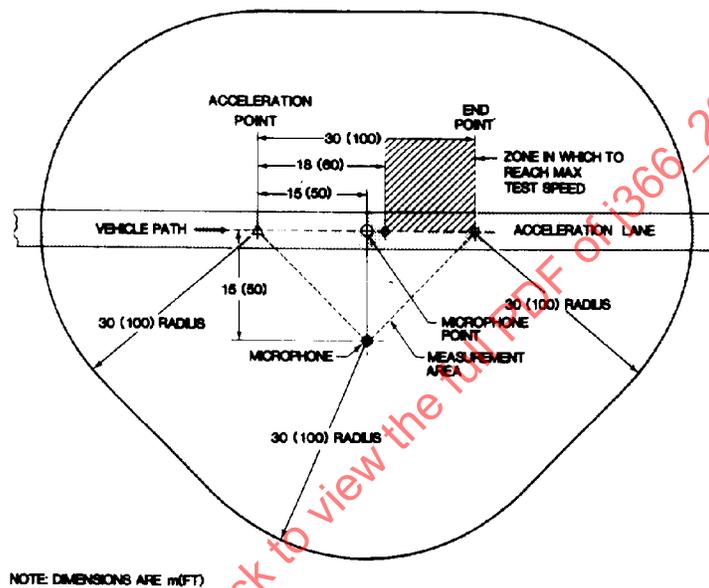


FIGURE 1—MINIMUM UNIDIRECTIONAL TEST SITE (SEE 4.1)

- 4.2 The microphone shall be located $15.2 \text{ m} \pm 0.1 \text{ m}$ ($50 \text{ ft} \pm 4 \text{ in}$) from the centerline of the vehicle travel and $1.2 \text{ m} \pm 0.1 \text{ m}$ ($4 \text{ ft} \pm 4 \text{ in}$) above the ground plane. The microphone point is defined as the point of intersection of the vehicle path and the normal to the vehicle path drawn from the microphone.

The microphone shall be oriented with respect to the source so that the sound strikes the diaphragm at an angle at which the microphone was designed to have the flattest frequency response over the frequency range 100 Hz to 10 kHz.

- 4.3 An acceleration point shall be established on the vehicle path 15.2 m (50 ft) before the microphone point.
- 4.4 An end point shall be established on the vehicle path 30.4 m (100 ft) from the acceleration point and 15.2 m (50 ft) from the microphone point.
- 4.5 The end zone is the last 12.2 m (40 ft) of vehicle path prior to the end point.
- 4.6 The measurement area shall be the triangular area formed by the acceleration point, the end point, and the microphone location.

- 4.7 The reference point on the vehicle, to indicate when the vehicle is at any of the points on the vehicle path, shall be the front of the vehicle, except as follows:
- 4.7.1 If the horizontal distance from the front of the vehicle to the exhaust outlet is more than 5080 mm (200 in), tests shall be run using both the front and rear of the vehicle as reference points.
- 4.7.2 If the engine is located rearward of the center of the chassis, the rear of the vehicle shall be used as the reference point.
- 4.8 During measurement, the surface of the ground within the measurement area shall be free from snow, long grass, loose soil, ashes, and other porous sound-absorbing materials.
- 4.9 Because bystanders have an appreciable influence on meter response when they are in the vicinity of the vehicle or microphone, not more than one person, other than the observer reading the meter, shall be within 15 m (50 ft) of the vehicle path or instrument, and that person shall be directly behind the observer reading the meter, on a line through the microphone and observer.
- 4.10 The ambient sound level (including wind effects) coming from sources other than the vehicle being measured shall be at least 10 dB lower than the level of the tested vehicle.
- 4.11 The vehicle path and measurement area shall be relatively smooth, dry concrete or sealed asphalt, free of extraneous material such as gravel.

5. Procedure

- 5.1 **Vehicle Operation**—Full throttle acceleration and closed throttle deceleration tests are to be used. A beginning engine speed and proper gear ratio must be determined for use during measurements.
- 5.2 **Maximum Test Speed**—The term maximum test speed as used in this document is defined as: For ungoverned engines, this is the rated engine speed as specified by the engine manufacturer. For governed engines, the maximum engine speed attained during the test, when wide open throttle is maintained past the end point.
- 5.2.1 Select the highest rear axle and/or transmission gear (“highest gear” is used in the usual sense; it is synonymous to the lowest numerical ratio) and an initial vehicle speed such that a wide-open throttle the vehicle will accelerate from the acceleration point:
- Starting at no more than two thirds (67%) of maximum rated engine speed.
 - Reaching maximum test speed within the end zone.
 - Without exceeding 55 km/h (35 mile/h) before reaching the end point.
- 5.2.1.1 Should maximum test speed be attained before reaching the end zone, decrease the approach rpm in 100 rpm increments until maximum test speed is attained within the end zone.
- 5.2.1.2 Should maximum test speed not be attained until beyond the end zone, select the next lower gear until maximum test speed is attained within the end zone.
- 5.2.1.3 Should the lowest gear still result in reaching maximum test speed beyond the permissible end zone, increase the approach rpm in 100 rpm increments until the maximum test speed is reached within the end zone.
- 5.2.2 For the acceleration test, approach the acceleration point using the engine speed and gear ratio selected in 5.2.1 and at the acceleration point rapidly establish wide-open throttle. The vehicle reference shall be as indicated in 4.7. Acceleration shall continue until maximum test speed is reached.