

Issued 1969-01  
Revised 2004-10

Superseding J378 JAN1988

**(R) Marine Propulsion System Wiring****1. Scope**

This SAE Recommended Practice covers the requirements for all marine inboard engine wiring, wiring assemblies, wiring components, and wiring connectors connected to microprocessors associated with the operation of the propulsion system.

EXCEPTION—Outboard engines and engines in Personal Water Craft (PWC).

NOTE—See ABYC E11 for additional requirements related to electrical installations on small craft.

**1.1 Purpose**

The purpose of this document is to insure that electrical and electronic wiring and wiring components used in a marine propulsion system meet the necessary safety and performance requirements based upon the marine mechanical and electrical environment. The recommendations include methods that may be employed by manufacturers to minimize the possibility that engine wiring may be a source of ignition of explosive or flammable vapors and provide manufacturers installing engine electrical systems sufficient information to design and develop engine wiring harnesses for marine usage.

**1.2 General**

Normally, marine engines are installed in enclosed compartments which are difficult to ventilate well enough to purge quickly any explosive mixtures of flammable gases, particularly if a continuous fuel leak is present. For this reason, it is essential that precautions be taken to minimize all sources of possible ignition of explosive fuel air mixtures that may be present.

Wiring can become a potential source of fuel vapor ignition in numerous ways, including damage to insulation covering, loose connections, accidental shorting at terminals, fatigue failures, etc. These occurrences can be as much a matter of installation as of design.

Performance tests to determine the necessary external ignition-protection of complete wiring harnesses are not practical. Protection can be afforded by proper selection of components and installation practices in accordance with the following recommendations. For inboard and stern drive engines, the minimum federal requirements for electrical wiring are covered by Title 33 Code of Federal Regulations Part 183 Sections 183.410 to 183.460.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

**TO PLACE A DOCUMENT ORDER:** Tel: 877-606-7323 (inside USA and Canada)  
Tel: 724-776-4970 (outside USA)  
Fax: 724-776-0790  
Email: [custsvc@sae.org](mailto:custsvc@sae.org)  
**SAE WEB ADDRESS:** <http://www.sae.org>

## 2. References

### 2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest version of SAE publications shall apply.

#### 2.1.1 SAE PUBLICATIONS

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, <http://www.sae.org>

SAE J858—Electrical Terminals—Blade Type

SAE J1127—Battery Cable

SAE J1128—Low-Tension Primary Cable

SAE J1191—High Tension Ignition Cable Assemblies—Marine

SAE J2030—Heavy-Duty Electrical Connector Performance Standard

SAE J2202—Heavy-Duty Wiring Systems for On-Highway Trucks

#### 2.1.2 FEDERAL PUBLICATIONS

Available from the Superintendent of Documents, U. S. Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9320. Web: [http://www.access.gpo.gov/nara/cfr/waisidx\\_99/33cfr183\\_99.html](http://www.access.gpo.gov/nara/cfr/waisidx_99/33cfr183_99.html)

Title 33 Code of Federal Regulations Part 183—Boats and Associated Equipment

#### 2.1.3 ASTM PUBLICATIONS

Available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959. Order online at <http://www.astm.org>

ASTM D 412—Test Methods for Vulcanized Rubber and Thermoplastic Rubbers and Thermoplastic Elastomers-Tension

ASTM D 573—Test Method for Rubber—Deterioration in an Air Oven

ASTM D 471—Standard Test Method for Rubber Property—Effect of Liquids

#### 2.1.4 ABYC PUBLICATION

ABYC documents can be ordered online at <http://www.abycinc.org>

ABYC E11—AC and DC Electrical Systems on Boats

### **3. Definitions**

#### **3.1 Butt Splice**

A splice in which the wire ends are positioned in the connection butt to butt.

#### **3.2 Low Voltage Caps**

An insulating shield to protect against accidental shorting of terminal or terminations in low-tension circuits.

#### **3.3 Connector**

An insulated device that holds a terminal(s) for electrically interconnecting one or more wires. Connectors shall conform to SAE J2030.

#### **3.4 End Cap Splice**

A splice in which all wires enter at the same end.

#### **3.5 Engine Wiring**

Any insulated electrical wiring of a marine engine necessary for operation, monitoring, and/or control.

#### **3.6 Low Tension Wiring**

Wiring used in a less than 50 V application.

#### **3.7 Personal Water Craft (PWC)**

A vessel that uses an inboard engine powering a water jet pump as its primary source of motive power and which is designed to be operated by a person sitting, standing, or kneeling on the vessel rather than the conventional manner of sitting or standing inside the vessel.

#### **3.8 Sonic-Weld Splice**

A weld produced by the introduction of high-frequency mechanical vibration between two components until a metallurgic bond is formed at the weld interface.

#### **3.9 Terminal**

A metal fitting attached to the end of a wire to facilitate making electrical connections.

#### **3.10 Tee Connection**

A form of a splice in which there are 3 to 4 connection points, each 90 degrees to each other.

### 3.11 Wire

The combination of a conductor surrounded by insulation.

## 4. *Low Tension Wiring*

The temperature rating of the wire insulation shall be determined by an accelerated aging test conducted in accordance with ASTM D 573, except samples of insulation are to be removed from the finished wire and aged 168 hours. The test temperature shall be 30 °C (86 °F) above the intended rated temperature.

Tensile strength after aging shall not be less than 80% of the original tensile strength. The elongation after aging shall be at least 50% of the original elongation. Except for intermittent higher currents, each circuit must not carry a current greater than specified in Figure 1 for the wire gauge and temperature rating. Resistance conductors that control circuit amperage and cranking motor circuit conductors are exempt from the requirements of Figure 1.

Wiring longer than 455 mm (18 in), not grouped together and protected, shall be no less than 1 mm<sup>2</sup> (metric wire) or AWG 16 gauge (US inch dimensioned wire).

The wiring assembly shall be supported at intervals not greater than 455 mm (18 in) shall be located so as to be protected from moving parts, and spaced or shielded from high temperature surfaces so that the wire insulation or sheath will not exceed its temperature rating. Wiring passing through holes shall be provided with grommets, bushings or other means to protect against abrasion. Wiring shall be routed above anticipated levels of bilge water or away from areas where water may accumulate, except wiring for submerged equipment such as bilge pumps. For additional cable specification, see SAE J1127 and SAE J1128.

Except where otherwise protected or not in contact with metal surfaces, the wiring circuits shall be grouped together and protected by non-metallic tape or braid covering which shall be capable of withstanding the abrasion test covered in Section 5.

## 5. *Abrasion Test for Non-metallic Tape or Braid Covering*

### 5.1 Principle

Three individual samples of identical construction shall be selected from a test lot. These samples shall be constructed the same as for all other sizes to be qualified by this test sample. The samples to be qualified by this test lot shall not have a cover thickness less than those of the test lot. After 1000 test cycles, each sample in the test lot shall not have any conductor material exposed.

### 5.2 Procedure

The test samples shall be preconditioned for at least 24 h at 23 °C ± 2 °C (73 °F ± 3.6 °F) and (50% ± 5%) relative humidity. Testing shall be performed at the previous temperature with an unused abrasive surface for each sample.

The abrasive surface shall be 25 x 76 mm ± 5 mm (1 x 3 in ± 0.2 in) 240 grit, medium grade, AlO<sub>3</sub> emery cloth firmly affixed to a hard surface which will cycle back and forth 76 mm ± 5 mm (3 in ± 0.2 in) in each direction.

CONDUCTOR SIZE		Temperature Rating of Conductor Insulation													
		60°C (140°F)		75°C (167°F)		80°C (176°F)		90°C (194°F)		105°C (221°F)		125°C (257°F)		200°C (392°F)	
		OUTSIDE ENGINE SPACES	INSIDE ENGINE SPACES	OUTSIDE ENGINE SPACES	INSIDE ENGINE SPACES	OUTSIDE ENGINE SPACES	INSIDE ENGINE SPACES	OUTSIDE ENGINE SPACES	INSIDE ENGINE SPACES	OUTSIDE ENGINE SPACES	INSIDE ENGINE SPACES	OUTSIDE ENGINE SPACES	INSIDE ENGINE SPACES	OUTSIDE OR INSIDE ENGINE SPACES	
18	(0.8)	10	5.8	10	7.5	15	11.7	20	16.4	20	17.0	25	22.3	25	
16	(1)	15	8.7	15	11.3	20	15.6	25	20.5	25	21.3	30	25.7	35	
14	(2)	20	11.6	20	15.0	25	19.5	30	24.6	35	29.8	40	35.6	45	
12	(3)	25	14.5	25	18.8	35	27.3	40	32.8	45	39.3	50	44.5	55	
10	(5)	40	23.2	40	30.0	50	39.0	55	45.1	60	51.0	70	62.3	70	
8	(8)	55	31.9	65	48.8	70	54.6	70	57.4	80	68.0	90	80.1	100	
6	(13)	80	46.4	95	71.3	100	78.0	100	82.0	120	102	125	111	135	
4	(19)	105	60.9	125	91.8	130	101	135	110	160	136	170	151	180	
2	(32)	140	81.2	170	127	175	138	180	147	210	178	225	200	240	
1	(40)	165	95.7	195	146	210	163	210	172	245	208	265	235	280	
0	(50)	195	113	230	172	245	191	245	200	285	242	305	271	325	
00	(62)	225	130	265	198	285	222	285	233	330	280	355	316	370	
000	(81)	260	150	310	232	330	257	330	270	385	327	410	384	430	
0000	(103)	300	174	380	270	385	300	385	315	445	378	475	422	510	

FIGURE 1—ALLOWABLE AMPERAGE OF CONDUCTORS FOR SYSTEMS UNDER 50 VOLTS

One test cycle equals 360 degrees rotation of the outside diameter and one back and forth movement of the abrasive surface.

A constant normal force of  $45\text{ N} \pm 0.5\text{ N}$  ( $10\text{ lb} \pm 2\text{ oz}$ ) shall be applied to the abrasive surface (see Figure 2).

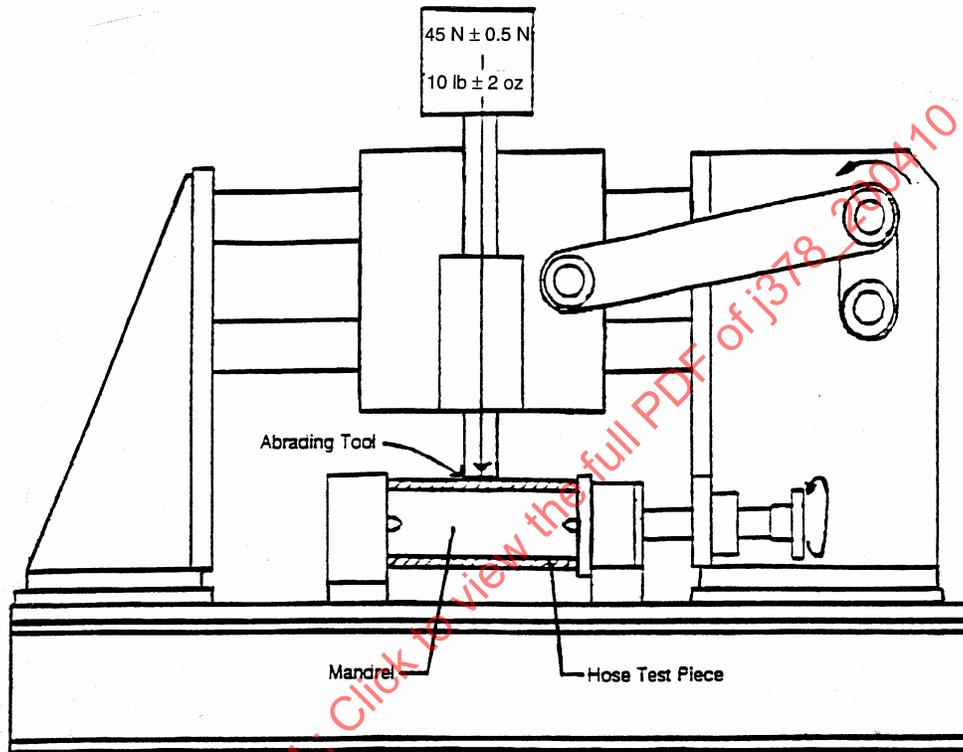


FIGURE 2—TYPICAL ABRASION TEST FIXTURE

**6. Wire Termination Requirements**

- 6.1** All terminal-to-wire and splice connections must pass the pull-off forces as listed in Table 1. These forces are the total separating forces, which includes the weight of the connecting wire when tested in a vertical position.

TABLE 1—MINIMUM PULL-OFF FORCE VALUES

Wire Size METRIC (mm <sup>2</sup> )	Wire Size ENGLISH (AWG)	1 Min Design Test Tension Force N	1 Min Design Test Tension Force lb	1 s Alternate Quality Control Test Tension Force N	1 s Alternate Quality Control Test Tension Force lb
(0.8)	18	44	10	80	18
(1)	16	66	15	124	28
(2)	14	133	30	155	35
(3)	12	155	35	177	40
(5)	10	177	40	200	45
(8)	8	200	45	222	50
(13)	6	222	50	355	80
(19)	4	311	70	444	100
(32)	2	400	90	600	135
(40)	1	444	100	666	150
(50)	0	556	125	778	175
(62)	00	667	150	1000	225
(81)	000	778	175	1155	260
(103)	0000	1000	225	1465	330

## 6.2 Procedure

The method of setting up the specimens in the pull off test fixture will vary according to the type of terminal or splice being tested. The test fixture shall be designed to hold one end of the terminal or wire stationary while the pull force is applied to the other end. Adapters may be required to allow a common test fixture to be used to test the various types of terminals and splices. In general, each type shall be secured in a position with the necessary adapters to hold the terminal or splice and keep the direction of pull along the axis of the wire. The force shall then be applied gradually so there is no sudden application, jerking, or swinging. Figure 3A illustrates the intention of the pull test set up on some types of terminals and splices. End cap type splices, however, shall have their wires pulled first in opposite directions, then with the end cap held securely, the wires shall be pulled individually away from the cap along the axis of the wire. If the cap contains wires of different sizes, test the smaller wire first. Tee connections and butt splices that contain more than one wire at either end shall be pulled parallel to the main wire then perpendicular to it.

Some types of terminals may be tested in pairs, such as, ring and lug types bolted back to back and knife disconnects mated together, provided the terminal wire barrels are kept parallel to each other and to the axis of the wire (See Figures 3A and 3B).

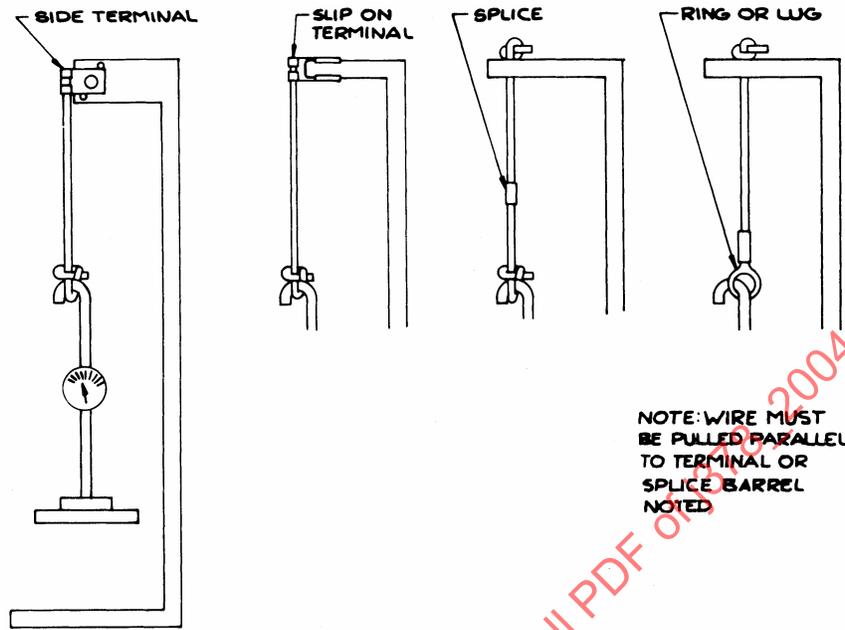


FIGURE 3A—EXAMPLES OF SOME TERMINAL PULL-OFF METHODS

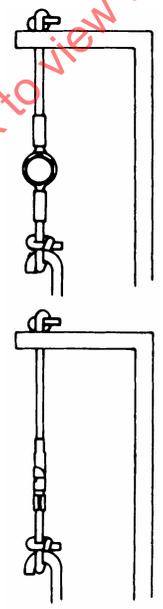


FIGURE 3B—PAIRING OF TERMINALS

## 7. Connector Moisture Resistance Requirements

7.1 Connectors used on or connected to microprocessors associated with marine propulsion systems shall pass the water immersion and fluid immersion tests.

### 7.2 Water Immersion

#### 7.2.1 PRECONDITIONING

The wired, or mated, connectors shall be placed in an oven at  $125\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  ( $257\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$ ) for 1 h.

#### 7.2.2 PROCEDURE

Remove the samples from the preconditioning oven and immediately immerse the samples in a 5% by weight salt water solution containing 0.1 g/L wetting solution to a depth of one meter for 4 h at  $23\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  ( $73\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$ ).

#### 7.2.3 PASS/FAIL CRITERIA

##### 7.2.3.1 Weatherproof Connectors

Continuity with one probe in the test solution and one probe attached to the conductor shall constitute failure.

##### 7.2.3.2 Exposed Connectors

Any visual evidence of water on the conductor after complete removal of the cover shall constitute failure.

### 7.3 Fluid Immersion Test

#### 7.3.1 PROCEDURE

Submerge a sample of wired and mated connector to each listed fluid at  $85\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  ( $185\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$ ) for 5 min, then allow to air dry for 24 h. This completes one cycle. Each sample is to be subjected to a total of 5 cycles. An untested sample is required to pass this test in each fluid.

The fluids are:

- a. Gasoline: ASTM D 471, Reference fuel B
- b. Power Steering Fluid: ASTM D 471, IRM903
- c. Engine Coolant: 50% distilled water and 50% ethylene glycol mixture

#### 7.3.2 PASS/FAIL CRITERIA

Visual swelling, cracking or continuity with one probe in the solution and one probe connected to the conductor shall constitute failure.

## 8. Terminal and Multi-Connector Plug Separation Requirements

8.1 Each single friction terminal, spring type terminal and non-locking multi-conductor plug that is outside of the electrical junction box must not separate when subjected to a 26.7 N (6 lb) tensile force for 1 min along the axial direction of the terminal or connector blade terminals, when used, shall conform to SAE J858. This force includes the weight of the connecting wires when tested in a vertical position. Condition the terminals or connectors prior to testing by connecting and disconnecting them six times, unless the terminals or connectors are specifically designed not to be disconnected and installed in the boat in such a way that they would not require disconnection for normal access, servicing, or maintenance.

### 8.2 Procedure

Mated terminals and connectors shall be installed in a test fixture (Figure 4) such that one of the halves of the terminal or connector is held secure and stationary while the other half is subjected to the 26.7 N (6 lb) tensile force. The force shall be applied gradually so there is no sudden application, jerking, or swinging. Different adapters will be required to hold the various types of terminals and connector types.

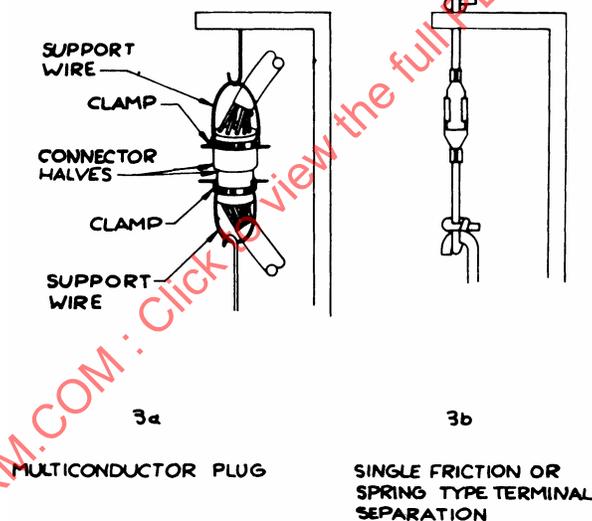


FIGURE 4—SEPARATION TEST FIXTURE

## 9. Low Voltage Caps

9.1 Cap material shall be aged for 168 h. at a temperature of  $90\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$  ( $194\text{ }^{\circ}\text{F} \pm 4\text{ }^{\circ}\text{F}$ ) in an oven and allowed to cool to room temperature. The tensile strength after aging shall not be less than 80% of the original tensile strength. The elongation after aging shall be at least 50% of the original elongation. Tests shall be conducted as per ASTM D 412.

## SAE J378 Revised OCT2004

**9.2** Cap material shall be submerged in each of the following liquids for a period of 5 h at  $23\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  ( $73\text{ }^{\circ}\text{F} \pm 6\text{ }^{\circ}\text{F}$ ). Tests may be in any sequence:

- a. Gasoline: ASTM D 471, Reference Fuel B
- b. Power Steering Fluid: ASTM D 471, IRM903
- c. Engine Coolant: 50% distilled water and 50 ethylene glycol mixture

9.2.1 The test specimens shall be removed, blotted dry, and judged with respect to untested specimens.

**9.3** Tested specimens shall not lose more than 40% of their tensile strength or swell by more than 50% of any dimension as a result of being subjected to the conditions under 9.2, Items (a) (b) (c).

**9.4** Dielectric strength of cap material shall be 100 VDC/mil minimum after completion of aging tests under 9.1 and 9.2.

### **10. High Tension Wiring**

High-tension cable assemblies used in engine ignition systems shall conform to SAE J1191.

Separators, stand-offs, looms, conduit, raceways, or abrasion resistant sleeving shall be used where necessary to maintain adequate separation between cables and to protect cable insulation from physical damage. Harness clamps shall be designed with smooth rounded edges to prevent damage from the clamp to the conductor or insulation. Non-metallic straps or clamps shall be designed to prevent failure if used in areas of high temperatures, or over engine(s), moving shafts, other machinery or passageways. High-tension cable to terminal connections shall withstand the tensile forces of 89 N (20 lb) minimum. The cable with terminals and boot attached shall not disconnect from a spark plug when a 26.7 N (6 lb) tensile force is applied for 1 min to the lead and pulled parallel to the axis of the spark plug.

### **11. Color Code**

The marking shown in Table 2 is recommended for marine engines and their associated components. As alternatives, the color code in SAE J1128 Low Tension Wiring, SAE J2202 Truck Wiring or the manufacturers code may be used. If alternative methods are used, a wiring diagram of the system indicating the method of identification must be supplied with the craft. Colored sleeves at the terminal ends of wires may be used in lieu of solid colored wires. The circuit diagram (Figures 5A and 5B) is for the purpose of clarifying color-coding and not to recommend particular circuiting or components. Components that may be wired in various ways should be wired with the marking corresponding to the particular branch of the circuit in which they are used.

SAE J378 Revised OCT2004

TABLE 2—MARINE ENGINE WIRING

Color	Number	Description
Purple	1XX	Ignition switch controlled
Black or Yellow	2XX	Grounds
Red <sup>(1)</sup>	3XX	Unprotected battery wires
Red/Purple	4XX	Overcurrent protected battery wires
Green or Green/Yellow Stripe	6XX	Bonding
Brown and Brown/Stripe	7XX	Alternator starter to ignition module
Orange	8XX	Alternator DC output and accessory feeds
Light Blue	9XX	Oil pressure
Tan	10XX	Water temperature
Gray	11XX	Tachometer
Green/White	12XX	Engine trim in and/or tilt down
Green/Orange	13XX	Engine independent trim down
Blue/White	14XX	Engine trim out and/or tilt up
Blue/Orange	15XX	Engine independent trim up
White	16XX	Must not be used in under 50 V wiring
Yellow/Red	17XX	Starting circuit
Yellow/Black	18XX	Choke
Black/Yellow	19XX	Ignition stop
Brown/White	20XX	Trim position sender
Manufacturer's Discretion		Ignition triggering and color/stripe for functions not designated

1. Red/Purple may be used for overcurrent protected wires.

