

Issued	1969-07
Reaffirmed	2009-10

Superseding J397 MAY2004

Deflection Limiting Volume—Protective Structures Laboratory Evaluation

This standard is technically equivalent to ISO 3164-1995 if normal horizontal and vertical seat adjustment is provided.

1. Scope—This SAE Standard applies to operator protective structures which may commonly be a part of construction, forestry, mining, and industrial machines.

1.1 Purpose—To establish limits on deflection permissible during laboratory evaluations of certain operator protective structures, such as ROPS, FOPS, OPS, and FOG as defined in other SAE standards.

2. References

2.1 Applicable Publications—The following publications form a part of this specification to the extent specified herein. Unless otherwise specified, the latest issue of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J833—Human Physical Dimensions
SAE J1163—Determining Seat Index Point (SIP)

2.1.2 ISO PUBLICATION—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ISO 3164—Earth-moving machinery—Laboratory evaluations of protective structures—Specifications for deflection limiting volume

3. Definitions

3.1 Deflection Limiting Volume (DLV)—An orthogonal approximation of a large, seated, male operator as defined in SAE J833 wearing normal clothing and a protective helmet as shown in Figure 1.

3.2 SIP Reference Axis—A horizontal axis for positioning the DLV with respect to the seat index point Figure 1.

4. Requirements

4.1 Accuracy—For purposes of this document, all linear dimensions of the DLV shown in Figure 1 shall have an accuracy of ± 5 mm. The accuracy of locating the DLV with respect to the Seat Index Point (SIP) of SAE J1163 shall be ± 13 mm.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


Copyright © 2009 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

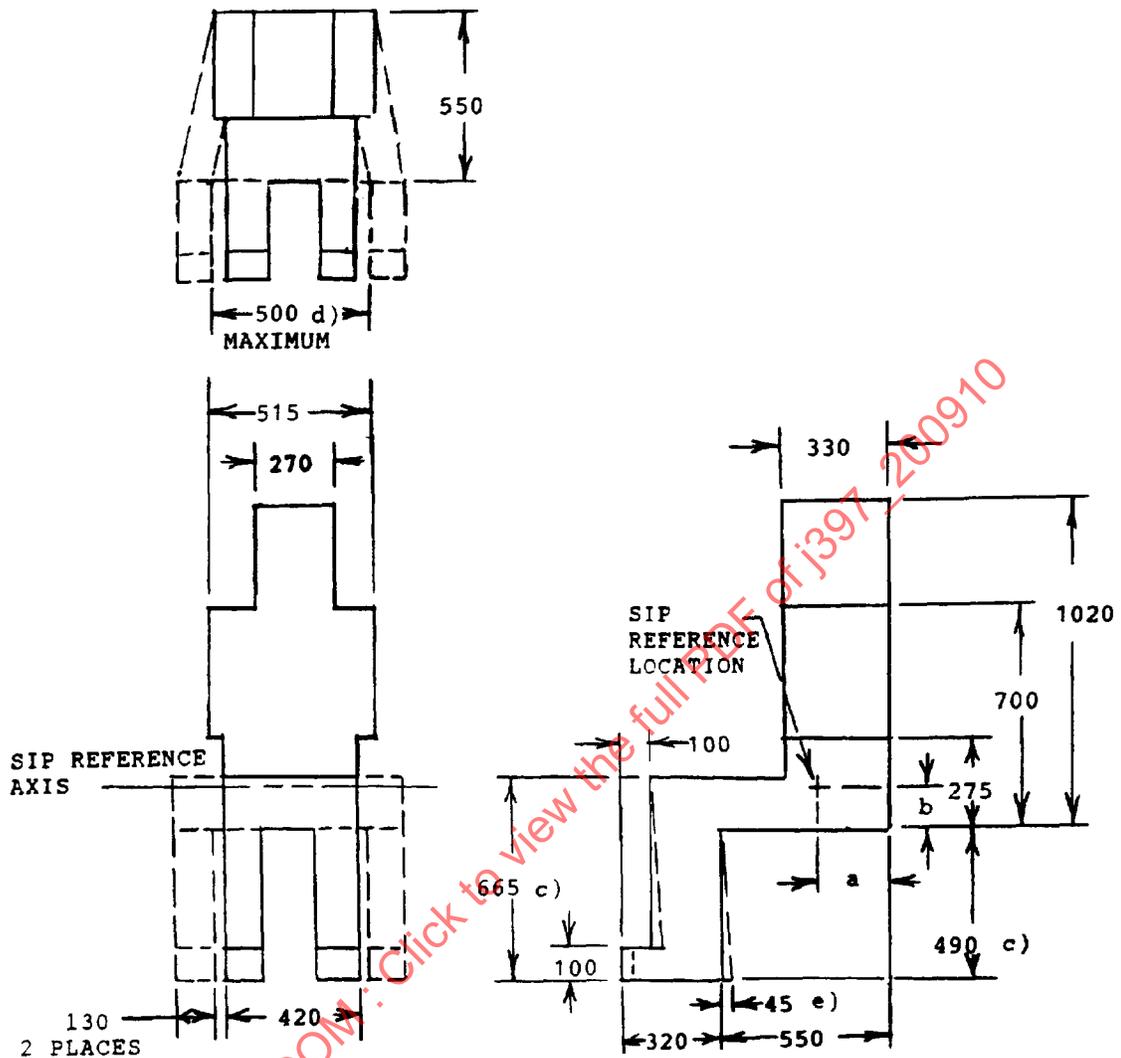

- a. 1/2 USABLE HORIZONTAL SEAT ADJUSTMENT + 140 mm.
- b. 1/2 USABLE VERTICAL SEAT ADJUSTMENT + 95 mm.
- c. MAY BE REDUCED TO ACCOMMODATE POSITION OF FLOOR PLATES.
- d. MACHINE PARTS OR CONTROLS MAY CAUSE FEET TO BE SEPARATED. AS A MINIMUM A CRUSH PROOF VOLUME MEETING THE DIMENSIONS OF A LARGE OPERATOR, PER SAE J833, MUST BE MAINTAINED FOR THE FEET AND LEGS.
- e. FEET MAY MOVE 45 mm REARWARD.

FIGURE 1—DEFLECTION LIMITING VOLUME

4.2 Location of DLV

- 4.2.1 The DLV shall be located using the SIP, as defined in SAE J1163, as the reference point; see Figure 1.
- 4.2.2 For machines with a rotatable seat, multiple seats, or multiple seat locations, the seat position used by the operator to move the machine in the travel mode shall be used to locate the DLV.
- 4.2.3 The DLV shall be positioned so that the SIP Reference Axis (see Figure 1) passes through the SIP. The DLV shall be centered transversely in the seat location with its principal axes horizontal and vertical (see central vertical plane in SAE J1163).

SAE J397 Reaffirmed OCT2009

- 4.2.4 The location of the DLV shall remain coincidental with the SIP even though the SIP may move during any or all of the laboratory loadings.
- 4.3 **Intrusion of Controls**—Machine controls, such as foot pedals, and their components normally positioned in the DLV are not considered to violate the DLV.

PREPARED BY THE SAE OFF-ROAD MACHINERY TECHNICAL COMMITTEE SC12—
MACHINE TEST PROCEDURES

REAFFIRMED BY THE SAE OPTC4—PROTECTIVE STRUCTURES

SAENORM.COM : Click to view the full PDF of J397-200910