

**Straight Pins (Solid)**

1. **Scope**—See Table 1 and Figure 1.

**TABLE 1—DIMENSIONS OF STRAIGHT PINS, IN.<sup>(1)</sup>**

A, Pin Dia Nominal	A, Pin Dia Max	A, Pin Dia Min	B Chamfer
0.062	0.0625	0.0605	0.015
0.094	0.0937	0.0917	0.015
0.109	0.1094	0.1074	0.015
0.125	0.1250	0.1230	0.015
0.156	0.1562	0.1542	0.015
0.188	0.1875	0.1855	0.015
0.219	0.2187	0.2167	0.015
0.250	0.2500	0.2480	0.015
0.312	0.3125	0.3095	0.030
0.375	0.3750	0.3720	0.030
0.438	0.4375	0.4345	0.030
0.500	0.500	0.4970	0.030

1. These pins must be straight and free from burrs or any other defects that will affect their serviceability.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

**TO PLACE A DOCUMENT ORDER:**

Tel: 877-606-7323 (inside USA and Canada)  
Tel: 724-776-4970 (outside USA)  
Fax: 724-776-0790  
Email: [custsvc@sae.org](mailto:custsvc@sae.org)  
<http://www.sae.org>

**SAE WEB ADDRESS:**

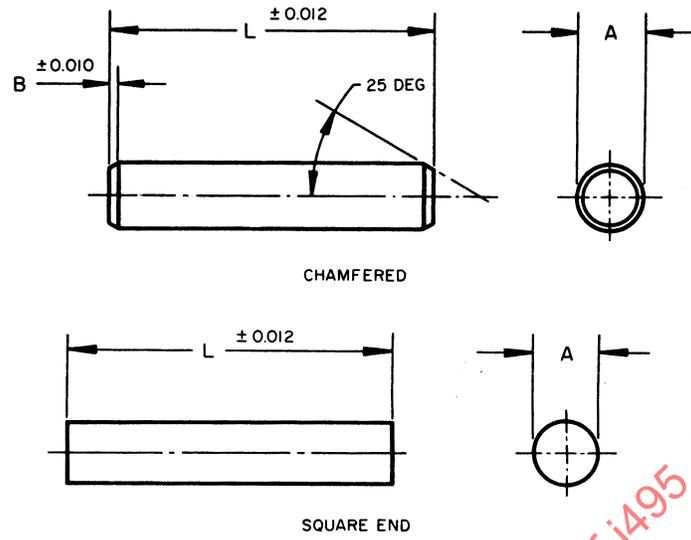


FIGURE 1—

2. **References**—There are no referenced publications specified herein.

PREPARED BY THE SAE FASTENERS COMMITTEE

SAENORM.COM Click to view the full PDF of j495\_200405