



<b>SURFACE VEHICLE STANDARD</b>	<b>J530™</b>	<b>FEB2024</b>
	Issued 1948-02 Reaffirmed 2018-03 Revised 2024-02	
Superseding J530 MAR2018		
Automotive Pipe Fittings		

## RATIONALE

This standard has been revised to include minimum working pressure and burst pressure requirements. This adds some needed clarification to the scope statement of low or medium pressures.

### 1. SCOPE

This SAE Standard includes complete general and dimensional specifications for those types of pipe fittings commonly used in the automotive and other mass production industries where the use of lubricants or sealers is objectionable. The automotive pipe fittings shown in Figures 1 to 17 and Tables 1 to 6 are intended for general automotive and similar applications involving low or medium pressures or in conjunction with automotive tube fittings in piping systems.

### 2. REFERENCES

#### 2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

##### 2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA); [www.sae.org](http://www.sae.org).

SAE J343	Test and Test Procedures for SAE 100R Series Hydraulic Hose and Hose Assemblies
SAE J476	Dryseal Pipe Threads
SAE J846	Coding Systems for Identification of Fluid Conductors and Connectors
SAE J1615	Thread Sealants

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2024 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

**TO PLACE A DOCUMENT ORDER:** Tel: 877-606-7323 (inside USA and Canada)  
Tel: +1 724-776-4970 (outside USA)  
Fax: 724-776-0790  
Email: [CustomerService@sae.org](mailto:CustomerService@sae.org)  
http://www.sae.org

SAE WEB ADDRESS:

For more information on this standard, visit  
[https://www.sae.org/standards/content/J530\\_202402](https://www.sae.org/standards/content/J530_202402)

## 2.1.2 ASTM Publications

Available from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, Tel: 610-832-9585, [www.astm.org](http://www.astm.org).

ASTM B117 Method of Salt Spray (Fog) Testing

## 3. AUTOMOTIVE PIPE FITTINGS

## 3.1 Automotive Pipe Fittings

NOTE: Unspecified detail with respect to dimensions, tolerances, contours, material, workmanship, etc., must conform to general specifications for automotive pipe fittings. Codes shown in brackets adjacent to figure numbers represent respective fitting identification in accordance with SAE J846 (February 1979).

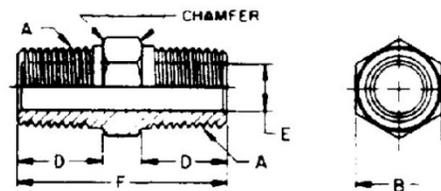


Figure 1 - Hexagon nipple (130137)

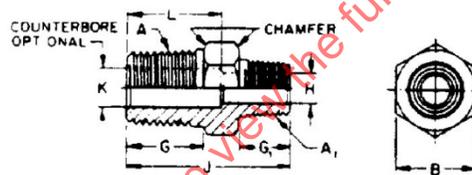


Figure 2 - Hexagon reducer nipple (130137)

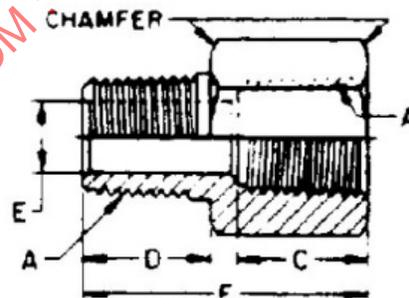


Figure 3 - Adapter (130139)

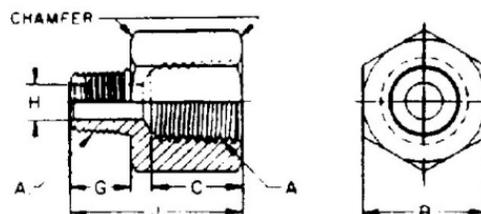


Figure 4 - Reducer adapter (130139)

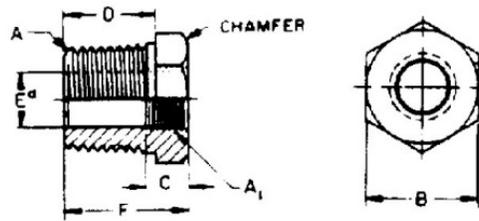


Figure 5 - Reducer bushing (130140)

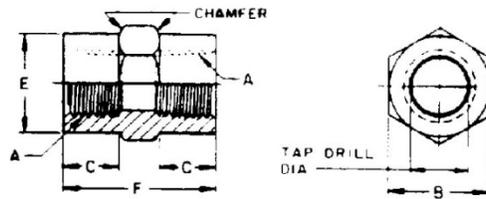


Figure 6 - Coupling (130138)

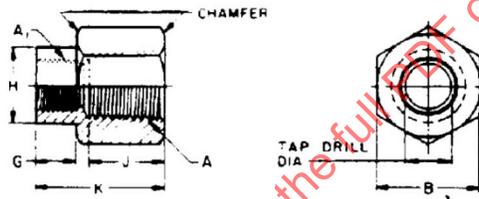


Figure 7 - Reducer coupling (130138)

SAENORM.COM : Click to view the full text of J530\_202402

Table 1 - Dimensions of hexagon nipples and reducer nipples (Figures 1 and 2)

Dryseal Taper Thread NPTF <sup>(1)</sup> in A Hexagon Nipples	Dryseal Taper Thread NPTF <sup>(1)</sup> in A x A <sub>1</sub> Hexagon Reducer Nipples	All Nipples	All Nipples	All Nipples	All Nipples	Nipples	Nipples	Nipples	Nipples	Nipples	Nipples
		B Hexagon Width Max mm	B Hexagon Width Max in	B Hexagon Width Min mm	B Hexagon Width Min in	D Shoulder Length <sup>(2)</sup> mm	D Shoulder Length <sup>(2)</sup> in	E Drill Dia mm	E Drill Dia in	F Overall Length <sup>(2)</sup> mm	F Overall Length <sup>(2)</sup> in
1/16–27	—	8.03	0.316	7.87	0.310	9.7	0.38	3.58	0.141	23.9	0.94
1/8–27	1/8 x 1/16	11.18	0.440	11.02	0.434	9.7	0.38	5.56	0.219	24.6	0.97
1/4–18	1/4 x 1/8	14.38	0.566	14.17	0.558	14.2	0.56	7.92	0.312	35.1	1.38
3/8–18	3/8 x 1/8	17.58	0.692	17.37	0.684	14.2	0.56	11.13	0.438	35.8	1.41
—	3/8 x 1/4	17.58	0.692	17.37	0.684	—	—	—	—	—	—
1/2–14	1/2 x 3/8	22.33	0.879	22.12	0.871	19.0	0.75	14.27	0.562	46.0	1.81 0

Dryseal Taper Thread NPTF <sup>(1)</sup> in A x A <sub>1</sub> Hexagon Reducer Nipples	Reducer Nipples G Shoulder Length <sup>(2)</sup> Min mm	Reducer Nipples G Shoulder Length <sup>(2)</sup> Min in	Reducer Nipples G <sub>1</sub> Shoulder Length <sup>(2)</sup> Min mm	Reducer Nipples G <sub>1</sub> Shoulder Length <sup>(2)</sup> Min in	Reducer Nipples H Drill Dia <sup>(3)</sup> mm	Reducer Nipples H Drill Dia <sup>(3)</sup> in	Reducer Nipples J Overall Length <sup>(2)</sup> mm	Reducer Nipples J Overall Length <sup>(2)</sup> in	Reducer Nipples Counterbore K Max Dia <sup>(3)</sup> mm	Reducer Nipples Counterbore K Max Dia <sup>(3)</sup> in	Reducer Nipples Counterbore L Max Depth <sup>(2),(3)</sup> mm	Reducer Nipples Counterbore L Max Depth <sup>(2),(3)</sup> in
1/8 x 1/16	9.7	0.38	9.7	0.38	3.58	0.141	24.6	0.97	5.66	0.223	11.9	0.47
1/4 x 1/8	14.2	0.56	9.7	0.38	5.56	0.219	30.2	1.19	8.08	0.310	17.5	0.69
3/8 x 1/8	14.2	0.56	9.7	0.38	5.56	0.219	31.0	1.22	11.28	0.444	17.5	0.69
3/8 x 1/4	14.2	0.56	14.2	0.56	7.92	0.312	35.8	1.41	11.28	0.444	17.5	0.69
1/2 x 3/8	19.0	0.75	14.2	0.56	11.13	0.438	41.1	1.62	14.43	0.568	23.1	0.91

1. Dryseal American Standard Taper Pipe Thread. See General Specifications.
2. Where SAE Short Pipe Thread is authorized by purchaser, dimensions D, F, G, G<sub>1</sub>, J, and L are reduced in accordance with reduction of pipe thread length. See General Specifications.
3. At manufacturer's option, through passages may conform with the smaller diameter specified or be counterbored to the larger diameter for the depth specified.

**Table 2 - Dimensions of adapters and reducer adapters (Figures 3 and 4)**

Dryseal Taper Thread NPTF <sup>(1)</sup> in A Adapters	Dryseal Taper Thread NPTF <sup>(1)</sup> in A x A <sub>1</sub> Reducer Adapters	All Adapters	All Adapters	Adapters	Adapters	Adapters	Adapters				
		B Hexagon Width Max mm	B Hexagon Width Max in	B Hexagon Width Min mm	B Hexagon Width Min in	C Tap Drill Depth <sup>(2),(3)</sup> Min mm	C Tap Drill Depth <sup>(2),(3)</sup> Min in	D Shoulder Length <sup>(2)</sup> Min mm	D Shoulder Length <sup>(2)</sup> Min in	E Dia Drill mm	E Dia Drill in
1/16-27	—	11.18	0.440	11.02	0.434	9.7	0.38	9.7	0.38	3.58	0.141
1/8-27	1/8 x 1/16	14.38	0.566	14.17	0.558	9.7	0.38	9.7	0.38	5.56	0.219
1/4-18	1/4 x 1/8	19.15	0.754	18.95	0.746	14.2	0.56	14.2	0.56	7.92	0.312
3/8-18	3/8 x 1/4	22.33	0.879	22.12	0.871	14.2	0.56	14.2	0.56	11.13	0.438
1/2-14	1/2 x 3/8	27.13	1.068	26.87	1.058	19.0	0.75	19.0	0.75	14.27	0.562
3/4-14	3/4 x 1/2	35.05	1.380	34.80	1.370	19.0	0.75	19.0	0.75	19.05	0.750
1-11-1/2	1 x 3/4	41.40	1.630	41.15	1.620	23.9	0.94	23.9	0.94	23.82	0.938

Dryseal Taper Thread NPTF <sup>(1)</sup> in A Adapters	Dryseal Taper Thread NPTF <sup>(1)</sup> in A x A <sub>1</sub> Reducer Adapters	Adapters	Adapters	Reducer Adapters	Reducer Adapters	Reducer Adapters	Reducer Adapters	Reducer Adapters	Reducer Adapters
		F Overall Length <sup>(2),(3)</sup> mm	F Overall Length <sup>(2)</sup> in	G Shoulder Length <sup>(2)</sup> Min mm	G Shoulder Length <sup>(2)</sup> Min in	H Dia Drill mm	H Dia Drill in	J Overall Length <sup>(2)</sup> mm	J Overall Length <sup>(2)</sup> in
1/16-27	—	21.3	0.84	—	—	—	—	—	—
1/8-27	1/8 x 1/16	22.4	0.88	9.7	0.38	3.58	0.141	21.3	0.84
1/4-18	1/4 x 1/8	31.8	1.25	9.7	0.38	5.56	0.219	26.9	1.06
3/8-18	3/8 x 1/4	31.8	1.28	14.2	0.56	77.92	0.312	31.8	1.25
1/2-14	1/2 x 3/8	42.2	1.66	14.2	0.56	11.13	0.438	37.3	1.47
3/4-14	3/4 x 1/2	42.9	1.69	19.0	0.75	14.27	0.562	42.9	1.69
1-11-1/2	1 x 3/4	52.3	2.06	19.0	0.75	19.05	0.750	47.8	1.88

1. Dryseal American Standard Taper Pipe Thread. See General Specifications.
2. Where SAE SHort Pipe Thread is authorized by purchaser, dimensions C, F, G, and J are reduced in accordance with reduction of pipe thread length. See General Specifications.
3. Tap drill depths given require use of bottoming taps to produce standard full thread lengths. See General Specifications.

## 3.2 Automotive Pipe Fittings - Cast Type

NOTE: Unspecified detail with respect to dimensions, tolerances, contours, material, workmanship, etc., must conform to general specifications for automotive pipe fittings. The dimensional designations on the first figure in each group shall apply to all other figures in that group except as shown otherwise. Codes shown in brackets adjacent to figure numbers represent respective fitting identification in accordance with SAE J846 (February 1979).

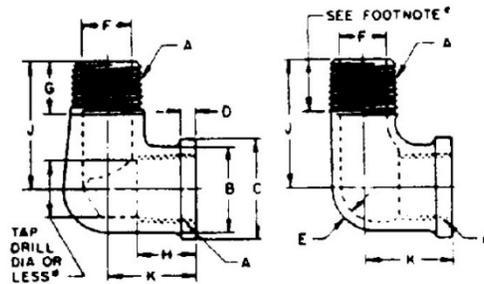


Figure 8 - 90-degree street elbows (130239)

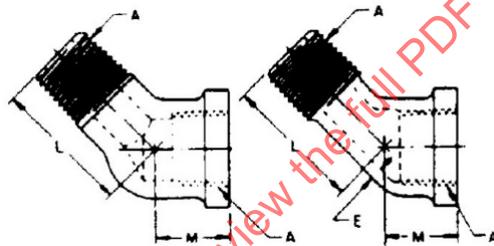


Figure 9 - 45-degree street elbows (130339)

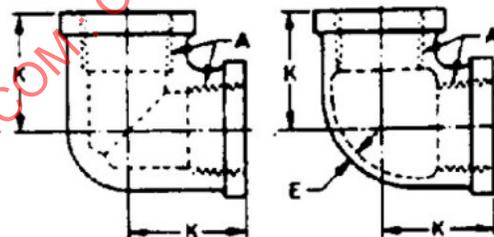


Figure 10 - 90-degree pipe elbows (130238)



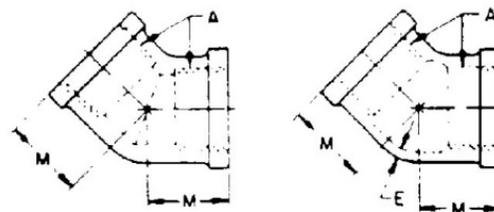



Figure 11 - 45-degree pipe elbows (130338)

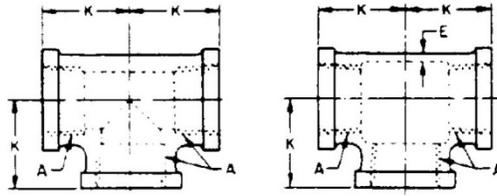

**Figure 12A - Internal, internal, internal tees (130438)**

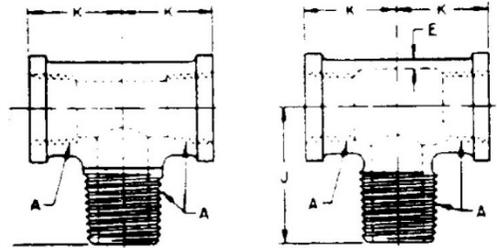

**Figure 12B - Internal, internal, external tees (130425)**

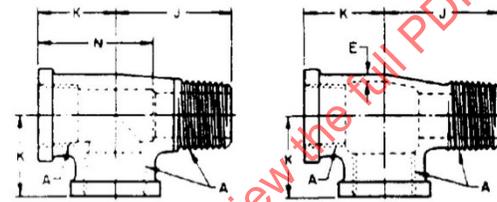

**Figure 12C - Internal, external, internal tees (130424)**

SAENORM.COM : Click to view the full PDF of J530\_202402

**Table 3 - Dimensions of reducer bushings (Figure 5)**

Dryseal Taper Thread NPTF <sup>(1)</sup> , in A x A <sub>1</sub>	B Hexagon Width Max mm	B Hexagon Width Max in	B Hexagon Width Min mm	B Hexagon Width Min in	C Tap Drill Depth <sup>(2),(3)</sup> Min mm	C Tap Drill Depth <sup>(2),(3)</sup> Min in	D Shoulder Length <sup>(2)</sup> Min mm	D Shoulder Length <sup>(2)</sup> Min in	E Hole Dia <sup>(4)</sup> Min mm	E Hole Dia <sup>(4)</sup> Min in	F Overall Length <sup>(2)</sup> mm	F Overall Length <sup>(2)</sup> in
1/8 x 1/16	11.18	0.440	11.02	0.434	9.7	0.38	9.7	0.38	3.53	0.139	14.2	0.56
1/4 x 1/8	14.38	0.566	14.17	0.558	9.7	0.38	14.2	0.56	5.51	0.217	19.0	0.75
3/8 x 1/8	17.58	0.692	17.37	0.684	9.7	0.38	14.2	0.56	5.51	0.217	19.0	0.75
3/8 x 1/4	19.15	0.754	18.95	0.746	14.2	0.56	14.2	0.56	7.85	0.309	19.0	0.75
1/2 x 1/8	22.33	0.879	22.12	0.871	9.6	0.38	19.0	0.75	5.51	0.217	25.4	1.00
1/2 x 1/4	22.33	0.879	22.12	0.871	14.2	0.56	19.0	0.75	7.85	0.309	25.4	1.00
1/2 x 3/8	22.33	0.879	22.12	0.871	14.2	0.56	19.0	0.75	11.05	0.435	25.4	1.00
3/4 x 1/4	28.70	1.130	28.45	1.120	14.2	0.56	19.0	0.75	7.85	0.309	25.4	1.00
3/4 x 3/8	28.70	1.130	28.45	1.120	14.2	0.56	19.0	0.75	11.05	0.435	25.4	1.00
3/4 x 1/2	28.70	1.130	28.45	1.120	19.0	0.75	19.0	0.75	14.20	0.559	25.4	1.00
1 x 1/2	36.63	1.442	36.37	1.432	19.0	0.75	23.9	0.94	14.20	0.559	33.3	1.31
1 x 3/4	36.63	1.442	36.37	1.432	19.0	0.75	23.9	0.94	18.98	0.747	33.3	1.31

1. Dryseal American Standard Pipe Thread. See General Specifications.

2. Where SAE Short Pipe Thread is authorized by purchaser, dimensions C, D, and F are reduced in accordance with reduction of pipe thread length. See General Specifications.

3. Tap drill depths given require use of bottoming taps to produce standard full thread lengths. See General Specifications.

4. At manufacturer's option, hole may conform to tap drill diameter or may be reduced beyond tap drill depth C, but in no case shall it be smaller than E diameter specified.

## 3.3 Automotive Pipe Fittings - Extruded or Bar Stock Type

NOTE: Unspecified detail with respect to dimensions, tolerances, contours, material, workmanship, etc., must conform to general specifications for automotive pipe fittings. The dimensional designations on the first figure in each group shall apply to all other figures in that group except as shown otherwise. Codes shown in brackets adjacent to figure numbers represent respective fitting identification in accordance with SAE J846 (February 1979).

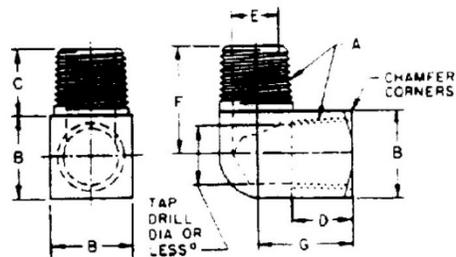


Figure 13 - 90-degree street elbow (130239)

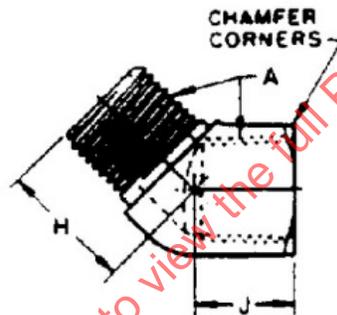


Figure 14 - 45-degree street elbow (130339)

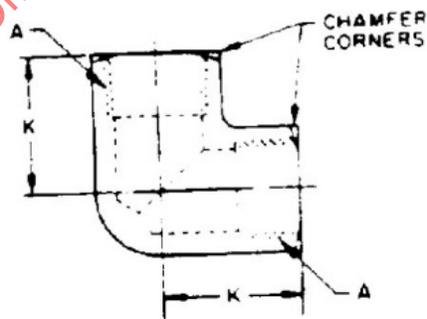


Figure 15 - 90-degree pipe elbow (130238)

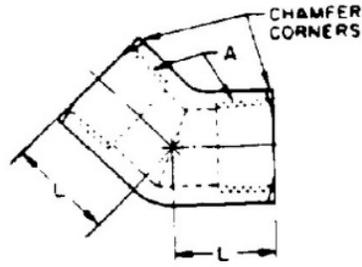


Figure 16 - 45-degree pipe elbow (130338)

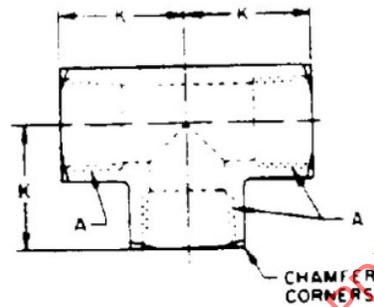


Figure 17A - Internal, internal, internal (130438)

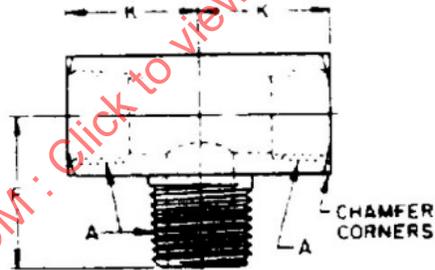


Figure 17B - Internal, internal, external (130425)

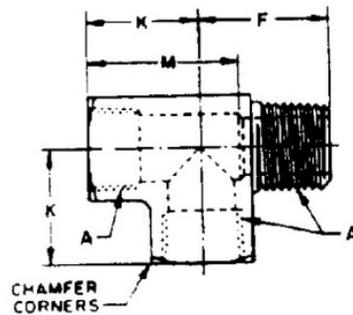


Figure 17C - Internal, external, internal (130424)

SAENORM.COM : Click to view the full PDF of j530\_202402

Table 4 - Dimensions of couplings and reducer couplings (Figures 6 and 7)

Dryseal Taper Thread NPTF <sup>(1)</sup> , in A Coupling	Dryseal Taper Thread NPTF <sup>(1)</sup> , in A x A <sub>1</sub> Reducer Coupling	All Couplings B Hexagon Width Max mm	All Couplings B Hexagon Width Max in	All Couplings B Hexagon Width Min mm	All Couplings B Hexagon Width Min in	Couplings C Shoulder Length <sup>(2)</sup> mm	Couplings C Shoulder Length <sup>(2)</sup> in	Couplings E Min Body Dia +0.00 -0.5 mm	Couplings E Min Body Dia +0.00 -0.02 in	Couplings F Overall Length <sup>(2)</sup> mm	Couplings F Overall Length <sup>(2)</sup> in
1/16-27	—	11.18	0.440	11.02	0.434	7.1	0.28	11.2	0.44	19.0	0.75
1/8-27	1/8 x 1/16	14.38	0.566	14.17	0.558	6.9	0.27	14.2	0.56	19.0	0.75
1/4-18	1/4 x 1/8	19.15	0.754	18.95	0.746	11.2	0.44	19.0	0.75	28.4	1.12
3/8-18	3/8 x 1/8	22.33	0.879	22.12	0.871	10.7	0.42	22.1	0.87	28.4	1.12
—	3/8 x 1/4	22.33	0.879	22.12	0.871	—	—	—	—	—	—
1/2-14	1/2 x 1/8	27.13	1.068	26.87	1.058	15.0	0.59	26.9	1.06	38.1	1.50
—	1/2 x 1/4	27.13	1.068	26.87	1.058	—	—	—	—	—	—
—	1/2 x 3/8	27.13	1.068	26.87	1.058	—	—	—	—	—	—

Dryseal Taper Thread NPTF <sup>(1)</sup> , in A Coupling	Dryseal Taper Thread NPTF <sup>(1)</sup> , in A x A <sub>1</sub> Reducer Coupling	Reducer Couplings G Shoulder Length <sup>(2)</sup> mm	Reducer Couplings G Shoulder Length <sup>(2)</sup> in	Reducer Couplings H Min Body Dia +0.00 -0.5 mm	Reducer Couplings H Min Body Dia +0.00 -0.02 in	Reducer Couplings J Min Tap Drill Depth <sup>(2),(3)</sup> mm	Reducer Couplings J Min Tap Drill Depth <sup>(2),(3)</sup> in	Reducer Couplings K Overall Length <sup>(2)</sup> mm	Reducer Couplings K Overall Length <sup>(2)</sup> in
1/16-27	—	—	—	—	—	—	—	—	—
1/8-27	1/8 x 1/16	7.9	0.31	11.2	0.44	9.7	0.38	19.8	0.78
1/4-18	1/4 x 1/8	7.9	0.31	14.2	0.56	14.2	0.56	24.6	0.97
3/8-18	3/8 x 1/8	6.4	0.25	14.2	0.56	14.2	0.56	23.9	0.94
—	3/8 x 1/4	11.9	0.47	19.0	0.75	14.2	0.56	29.5	1.16
1/2-14	1/2 x 1/8	6.4	0.25	14.2	0.56	19.0	0.75	30.2	1.19
—	1/2 x 1/4	8.6	0.34	19.0	0.75	19.0	0.75	32.5	1.28
—	1/2 x 3/8	11.2	0.44	22.1	0.87	19.0	0.75	35.1	1.38

NOTE—All inch dimensions, except thread and tubing diameter call out, will be deleted from the catalog in the next publication.

1. Dryseal American Standard Taper Pipe Thread. See General Specifications.
2. Where SAE Short Pipe Thread is authorized by purchaser, dimensions C, F, G, J, and K are reduced in accordance with reduction of pipe thread length. See General Specifications.
3. Tap drill depths given require use of bottoming taps to produce standard full thread length. See General Specifications.

Table 5 - Dimensions of cast-type street elbows and pipe tees (Figures 8 to 12)

A Dryseal Taper Thread NPTF <sup>(1)</sup> , in	B Min Body Dia mm	B Min Body Dia in	C Min Collar Dia mm	C Min Collar Dia in	D Min Collar Thick- ness mm	D Min Collar Thick- ness in	E Min Wall Thick- ness mm	E Min Wall Thick- ness in	F Drill Dia <sup>(6)</sup> mm	F Drill Dia <sup>(6)</sup> in	G Turned Length <sup>(2)</sup> Min mm	G Turned Length <sup>(2)</sup> Min in	H Min Tap Drill Depth <sup>(2),(3)</sup> mm	H Min Tap Drill Depth <sup>(2),(3)</sup> in	J Center to End <sup>(2)</sup> Max mm	J Center to End <sup>(2)</sup> Max in
1/16-27	11.2	0.44	13.5	0.53	3.0	0.12	2.0	0.08	3.58	0.141	9.7	0.38	9.7	0.38	21.3	0.84
1/8-27	14.2	0.56	17.0	0.67	3.6	0.14	2.0	0.08	5.56	0.219	9.7	0.38	9.7	0.38	24.1	0.95
1/4-18	19.3	0.72	20.6	0.81	4.1	0.16	2.0	0.08	7.92	0.312	14.2	0.56	14.2	0.56	29.2	1.15
3/8-18	22.4	0.88	25.4	1.00	4.3	0.17	2.3	0.09	11.13	0.438	14.2	0.56	14.2	0.56	33.0	1.30
1/2-14	26.2	1.03	29.7	1.17	4.8	0.19	2.3	0.09	14.27	0.562	19.0	0.75	19.0	0.75	39.6	1.56

A Dryseal Taper Thread NPTF <sup>(1)</sup> , in	J Center to End <sup>(2)</sup> Min mm	J Center to End <sup>(2)</sup> Min in	K Center to End <sup>(2)</sup> Max mm	K Center to End <sup>(2)</sup> Max in	K Center to End <sup>(2)</sup> Min mm	K Center to End <sup>(2)</sup> Min in	L Center to End <sup>(2)</sup> Max mm	L Center to End <sup>(2)</sup> Max in	L Center to End <sup>(2)</sup> Min mm	L Center to End <sup>(2)</sup> Min in	M Center to End <sup>(2)</sup> Max mm	M Center to End <sup>(2)</sup> Max in	M Center to End <sup>(2)</sup> Min mm	M Center to End <sup>(2)</sup> Min in	N Drill Depth mm	N Drill Depth in
1/16-27	19.8	0.78	13.5	0.53	11.9	0.47	18.3	0.72	16.8	0.66	11.2	0.44	9.7	0.38	16.8	0.66
1/8-27	22.6	0.89	14.7	0.58	13.2	0.52	20.6	0.81	19.0	0.75	11.4	0.45	9.9	0.39	19.0	0.75
1/4-18	27.2	1.07	19.3	0.76	17.3	0.68	23.4	0.92	21.3	0.84	15.2	0.60	13.2	0.52	24.6	0.97
3/8-18	30.5	1.20	22.4	0.88	19.8	0.78	24.6	0.97	22.1	0.87	17.0	0.67	14.5	0.57	—	—
1/2-14	36.6	1.44	27.4	1.08	24.4	0.96	28.4	1.12	25.4	1.00	21.3	0.84	18.3	0.72	—	—

1. Dryseal American Standard Taper Pipe Thread. See General Specifications.
2. Where SAE Short Pipe Thread is authorized by purchaser, dimensions G, H, J, K, L, and M are reduced in accordance with reduction of pipe thread length. See General Specifications.
3. Tap drill depths given require use of bottoming taps to produce standard full thread length. See General Specifications.
4. Hole diameters may be reduced beyond tap drill depth H, but shall not be less than F specified for corresponding size. (See Figure 8.)
5. Minimum pipe thread length where body is relieved or undercut shall not be shorter than L2 plus one turn (thread) full thread. Thread length may be reduced one pitch (thread) if thread is cut through into relief or undercut. See SAE J476 and Figure 8.
6. 1/16, 1/8, and 1/4 in size cast fittings are generally produced from solid castings and have drilled passage holes, 3/8 and 1/2 in size cast fittings are generally produced with cored passage holes and may have internal minimum full thread length of 9.1 and 10.9 mm (0.36 and 0.43 in), respectively.

**Table 6 - Dimensions of extruded and forged type street elbows, pipe elbows, and pipe tees (Figures 13 to 17)**

A Dryseal Taper Thread NPTF <sup>(1)</sup> , in	B Body Size mm	B Body Size in	C Turned Length <sup>(2)</sup> Min mm	C Turned Length <sup>(2)</sup> Min in	D Min Tap Drill Depth <sup>(2),(3)</sup> mm	D Min Tap Drill Depth <sup>(2),(3)</sup> in	E Drill Dia <sup>(4)</sup> mm	E Drill Dia <sup>(4)</sup> in	F Center to End <sup>(2)</sup> ±0.8 mm	F Center to End <sup>(2)</sup> ±0.03 in	G Center to End <sup>(2)</sup> ±0.8 mm	G Center to End <sup>(2)</sup> ±0.03 in
1/16-27	11.11	7/16	9.7	0.38	9.7	0.38	3.58	0.141	15.0	0.59	11.4	0.45
1/8-27	14.29	9/16	9.7	0.38	9.7	0.38	5.56	0.219	16.8	0.66	12.2	0.48
1/4-18	17.46	11/16	14.2	0.56	14.2	0.56	7.92	0.312	23.1	0.91	18.3	0.72
3/8-18	20.64	13/16	14.2	0.56	14.2	0.56	11.13	0.438	24.6	0.97	19.8	0.78
1/2-14	25.40	1	19.0	0.75	19.0	0.75	14.27	0.562	31.8	1.25	26.2	1.03
3/4-14	31.75	1-1/4	19.0	0.75	19.0	0.75	19.05	0.750	35.1	1.38	28.4	1.12
1-11-1/2	38.10	1-1/2	23.9	0.94	23.9	0.94	23.82	0.938	42.9	1.69	35.8	1.41

A Dryseal Taper Thread NPTF <sup>(1)</sup> , in	H Center to End <sup>(2)</sup> ±0.8 mm	H Center to End <sup>(2)</sup> ±0.03 in	J Center to End <sup>(2)</sup> ±0.8 mm	J Center to End <sup>(2)</sup> ±0.03 in	K Center to End <sup>(2)</sup> ±0.8 mm	K Center to End <sup>(2)</sup> ±0.03 in	L Center to End <sup>(2)</sup> ±0.8 mm	L Center to End <sup>(2)</sup> ±0.03 in	M Drill Depth mm	M Drill Depth in
1/16-27	11.9	0.47	9.7	0.38	12.7	0.50	11.2	0.44	16.8	0.66
1/8-27	12.7	0.50	9.7	0.38	14.0	0.55	11.4	0.45	19.0	0.75
1/4-18	18.3	0.72	14.2	0.56	19.8	0.78	16.8	0.66	26.2	1.03
3/8-18	19.8	0.78	14.2	0.56	21.3	0.84	17.5	0.69	29.7	1.17
1/2-14	25.4	1.00	19.0	0.75	27.7	1.09	23.1	0.91	37.6	1.48
3/4-14	26.9	1.06	19.0	0.75	29.5	1.16	23.9	0.94	42.2	1.66
1-11-1/2	34.0	1.34	23.9	0.94	38.6	1.52	30.2	1.19	53.8	2.12

1. Dryseal American Standard Taper Pipe Thread. See General Specifications.
2. Where SAE Short Pipe Thread is authorized by purchaser, dimensions C, D, F, G, H, J, K, and L are reduced in accordance with reduction of pipe thread length. See General Specifications.
3. Tap drill depths given require use of bottoming taps to produce standard full thread length. See General Specifications.
4. Hole diameter may be reduced beyond tap drill depth D but shall not be less than E specified for corresponding size. (See Figure 13.)

## 4. GENERAL SPECIFICATIONS

### 4.1 Dimensions and Tolerances

Except for nominal sizes and thread specifications, dimensions and tolerances are given in both SI and U.S. customary units as designated. Tabulated dimensions shall apply to the finished fittings, plated or otherwise processed, as specified by the purchaser. Unless otherwise specified, maximum and minimum across flats dimensions shall be within the commercial tolerance of bar or extruded stock from which the fittings are produced. The minimum across corner dimensions of external hexagons shall be 1.092 times the nominal width across flats but shall not result in a side flat width less than 0.43 times the nominal width across flats. The minimum across corner dimensions of external squares shall be 1.25 times the nominal width across flats but shall not result in a side flat width less than 0.75 times the nominal width across flats. Unless otherwise specified, tolerance on hole diameters designated drill in the dimensional tables shall be as tabulated in Table 7.

**Table 7 - Drill tolerances**

Drill Size Range mm	Drill Size Range in	Tolerance on Hole Diameter Plus mm	Tolerance on Hole Diameter Plus in	Tolerance on Hole Diameter Minus mm	Tolerance on Hole Diameter Minus in
0.343 thru 4.699	0.0135 thru 0.1850	0.08	0.003	0.05	0.002
4.762 thru 6.299	0.1875 thru 0.2480	0.10	0.004	0.05	0.002
6.350 thru 19.050	0.2500 thru 0.7500	0.15	0.006	0.08	0.003
19.25 thru 25.400	0.7579 thru 1.0000	0.18	0.007	0.10	0.004

Tolerance on all dimensions not otherwise limited shall be  $\pm 0.25$  mm ( $\pm 0.010$  inch). Angular tolerance on axis of ends on elbows and tees shall be  $\pm 2.50$  degrees for sizes up to and including  $3/8$  inch and  $\pm 1.50$  degrees for sizes larger than  $3/8$  inch.

### 4.2 Working Pressure

The working pressure of the fittings covered by this standard, unless otherwise specified, shall be rated to a minimum working pressure of 1000 psi (6.89 MPa). Subject fittings shall also be able to withstand a minimum burst pressure of 4000 psi (27.58 MPa).

### 4.3 Burst Test

Burst test shall be conducted at minimum torque values or minimum number of turns from finger tight position specified in assembly procedure by manufacturer. The test shall be conducted as specified in SAE J343.

### 4.3 Wall Thickness

Unless otherwise designated, the wall thickness at any point on fittings shall not be less than the thickness established by the specified dimensions, tolerances, and eccentricities for inner and outer surfaces.

### 4.4 Contour

Details of contour shall be optional with the manufacturer provided the tabulated dimensions are maintained and serviceability of the fittings is not impaired. Wrench flats on elbows and tees shall be optional. Where extruded or forged shapes are reduced to conserve material, the wall thickness, unless otherwise specified, shall not be less than the respective minimum values tabulated in Table 8.